

Outline:

- Small footprint power inductors designed for maximum efficiency And low cost
- Industry-standard pin spacings; protective PVC sleeve
- In addition to the standard versions of inductors shown here custom inductors are available to meet your exact requirements

Features:

- Core material: Ferrite
- Environmental: RoHS, Reach compliant, Halogen free
- Weight: 0.545g
- Moisture Sensitivity: Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity).
- Operating temperature range: -40°C ~ +125°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +125°C


Application:

- Ideal for noise filtering in power amplifiers, power supplies and Speaker crossover networks.
- buck converter, network communication equipment, and etc

1 Electrical Characteristics

Part No.	Inductance (μH) $\times 1$ $\pm 10\%$	D.C.R. (m Ω)		Isat	Irms
		Typical	Max.	(A) $\times 2$ Typical	(A) $\times 3$ Typical
PK0507-100K	10.0	42.0	50.4	2.30	2.96
PK0507-120K	12.0	52.9	63.5	2.10	2.64
PK0507-150K	15.0	60.2	72.2	1.70	2.48
PK0507-180K	18.0	70.3	84.3	1.65	2.09
PK0507-220K	22.0	83.9	101	1.40	1.92
PK0507-270K	27.0	107	128	1.25	1.70
PK0507-330K	33.0	120	144	1.20	1.60
PK0507-390K	39.0	154	185	1.15	1.39
PK0507-470K	47.0	173	207	1.10	1.32
PK0507-560K	56.0	237	285	0.97	1.12
PK0507-680K	68.0	266	319	0.90	1.06
PK0507-820K	82.0	300	360	0.80	1.00
PK0507-101K	100	394	473	0.75	0.87
PK0507-121K	120	431	517	0.63	0.83
PK0507-151K	150	581	697	0.56	0.72
PK0507-181K	180	647	777	0.49	0.68
PK0507-221K	220	738	886	0.45	0.64
PK0507-271K	270	931	1,117	0.40	0.57
PK0507-331K	330	1,088	1,305	0.38	0.52
PK0507-391K	390	1,434	1,721	0.36	0.45
PK0507-471K	470	1,601	1,921	0.32	0.43
PK0507-561K	560	1,987	2,385	0.28	0.39
PK0507-681K	680	2,276	2,731	0.27	0.36
PK0507-821K	820	3,157	3,788	0.23	0.31
PK0507-102K	1,000	3,681	4,417	0.22	0.28

2 Product Dimensions (mm)





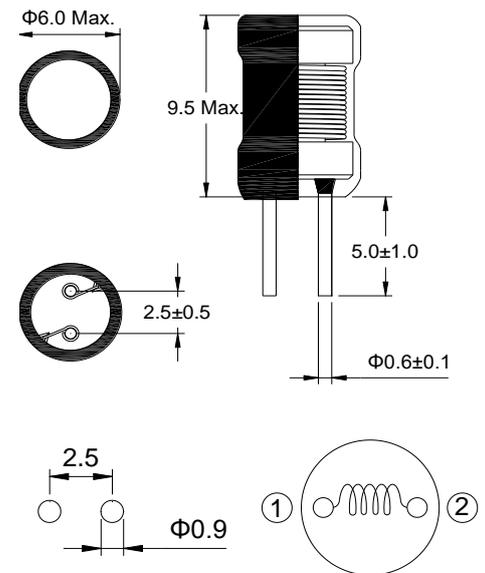


Typical Hole Pattern







Schematic











All data is tested on 25°C ambient temperature










1. Inductance measure condition at 1kHz, 0.25V
2. Isat: the actual value of DC current when the Inductance decrease 20% of its initial value
3. Irms: the actual value of DC current when the the temperature rise is $\Delta T 40^\circ\text{C}$ ($T_a = 25^\circ\text{C}$)

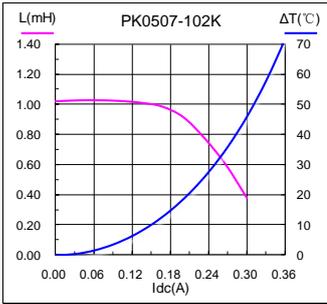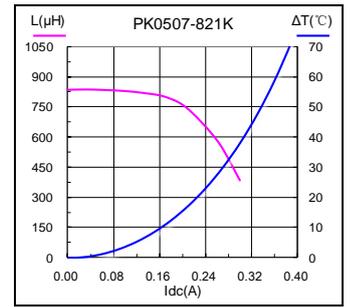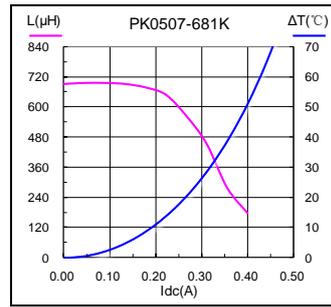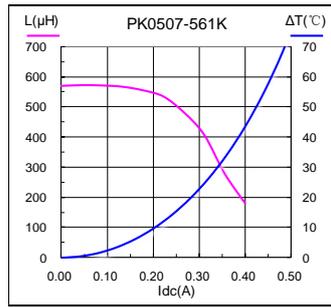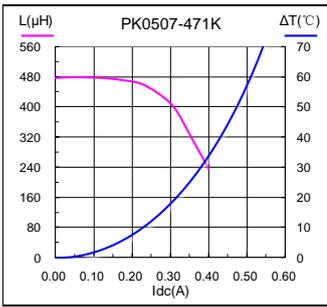











4 L vs Frequency





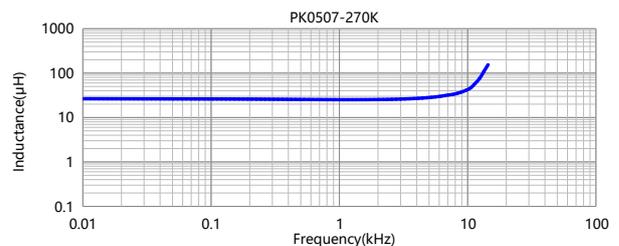
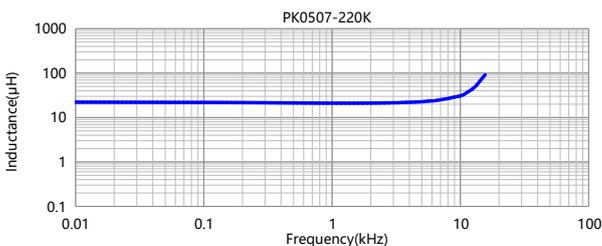
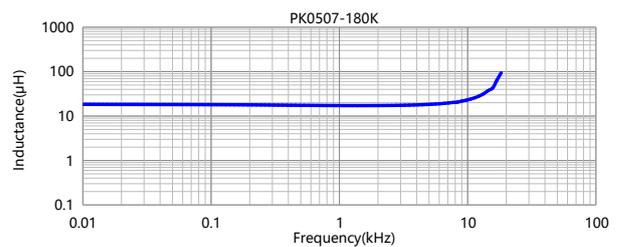
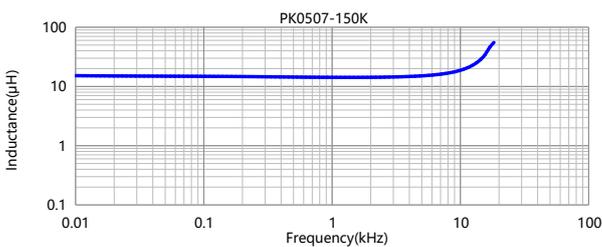
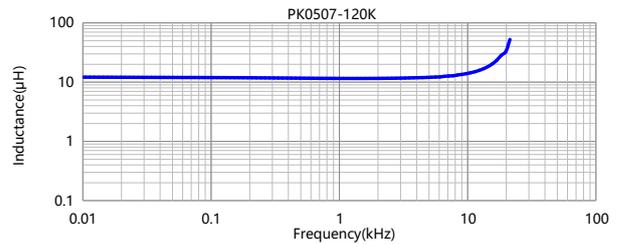
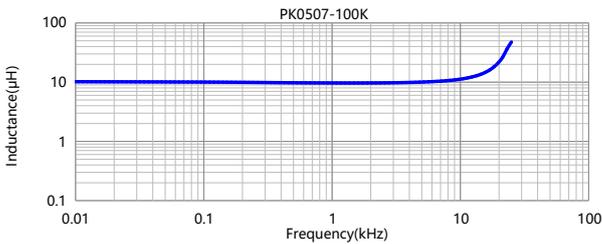


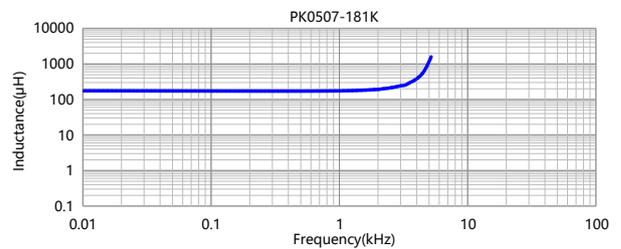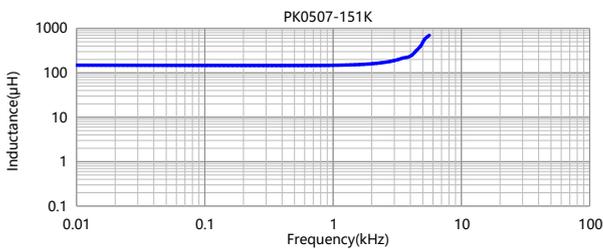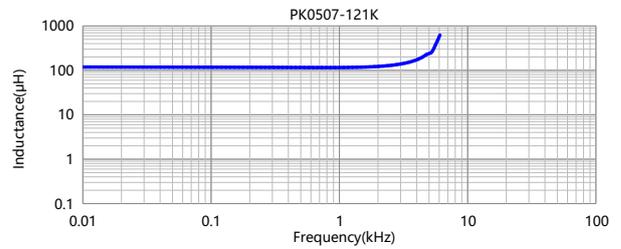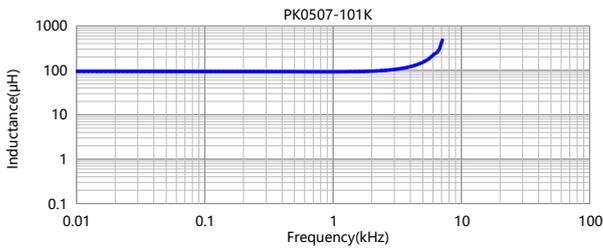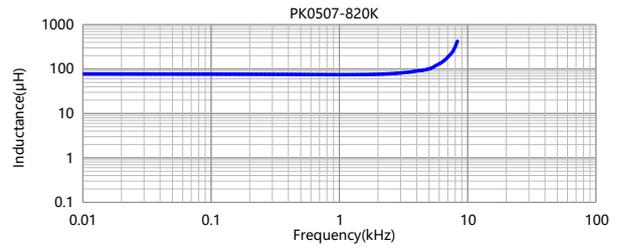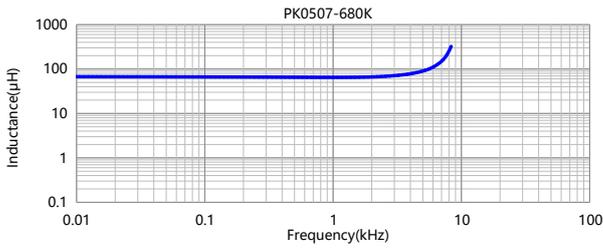
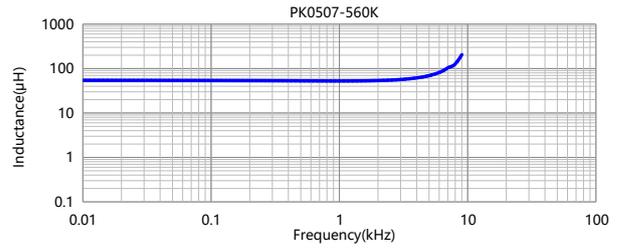
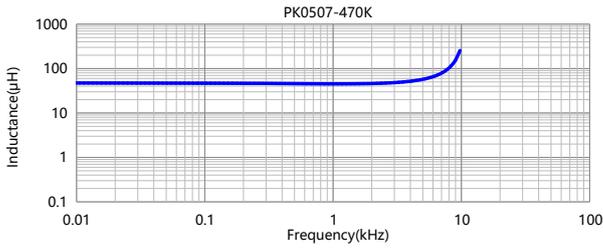
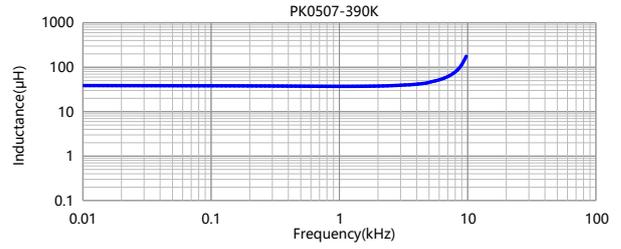
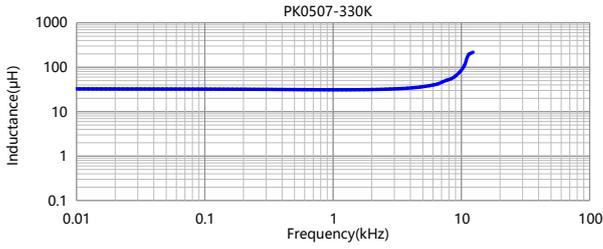


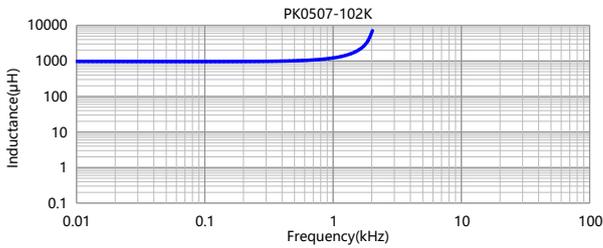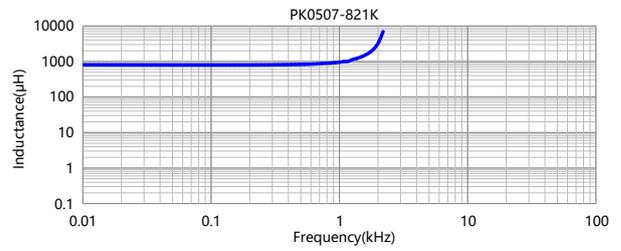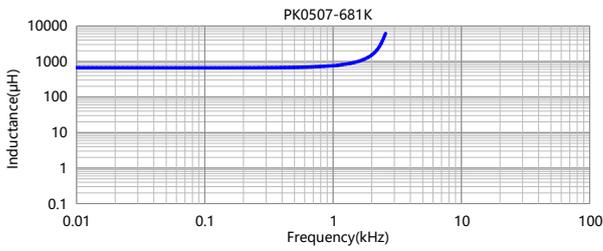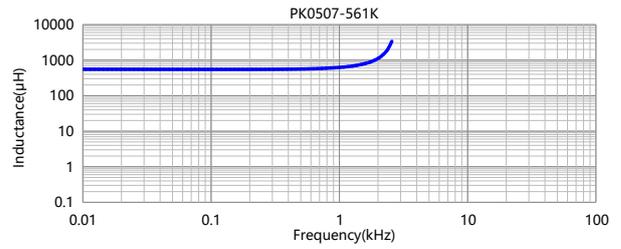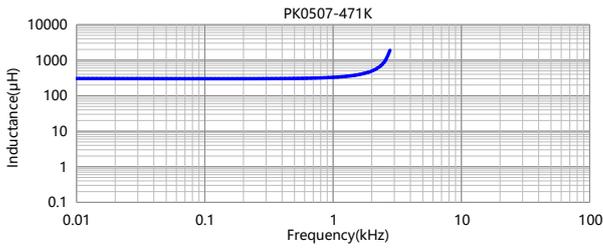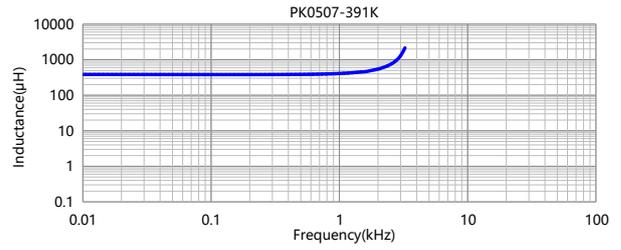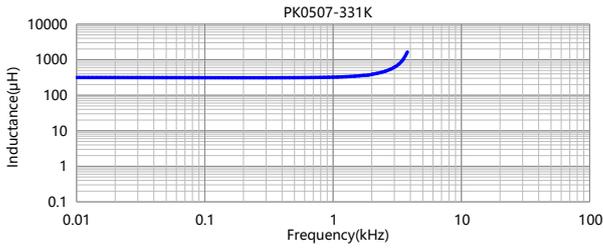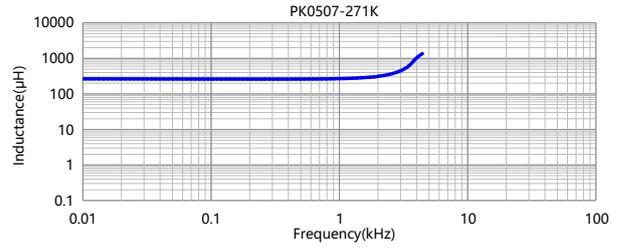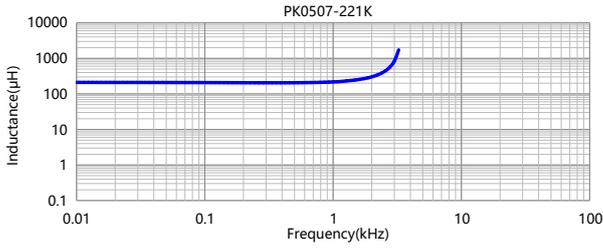

5 Impedance vs Frequency

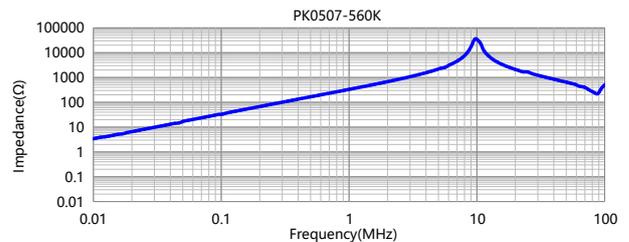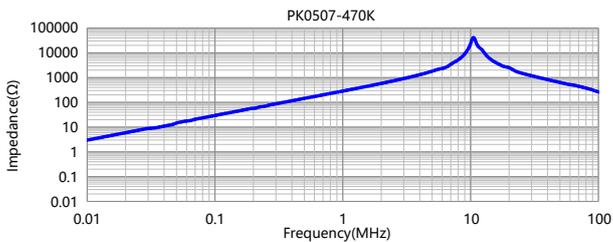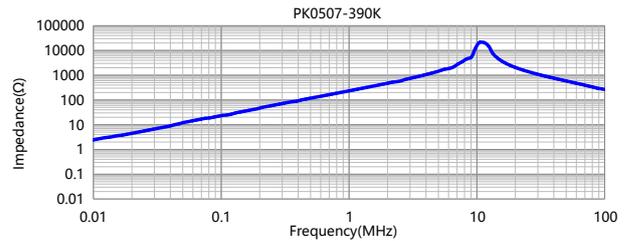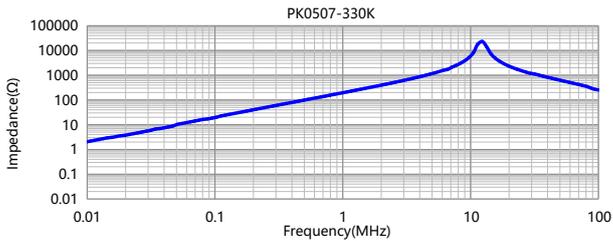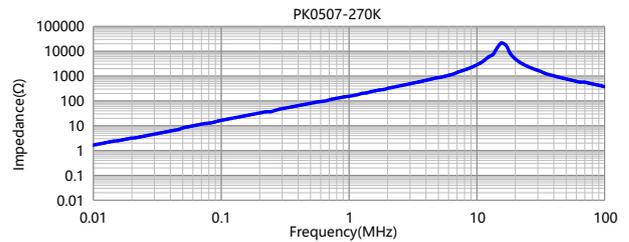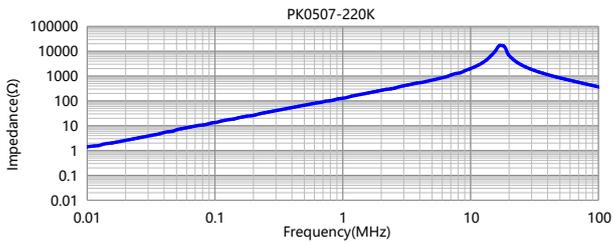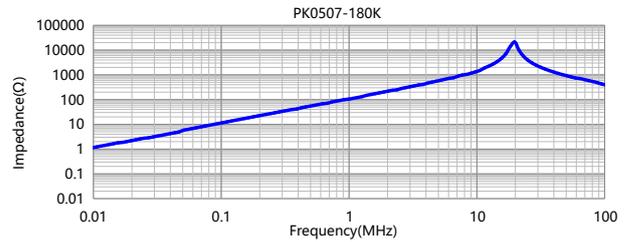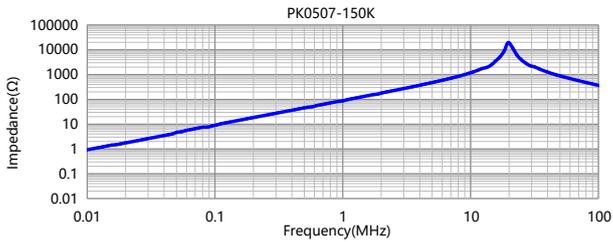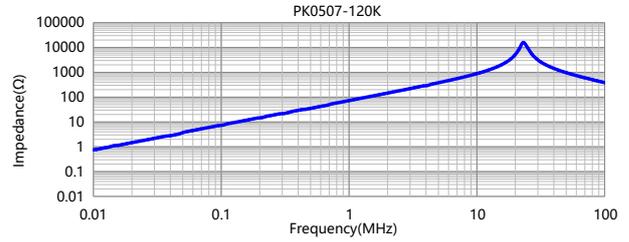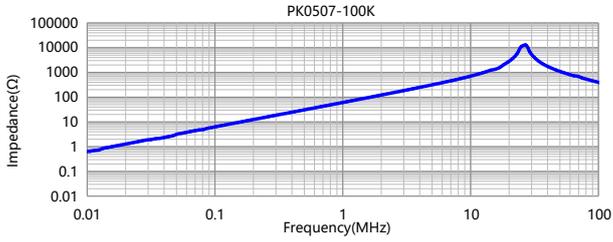


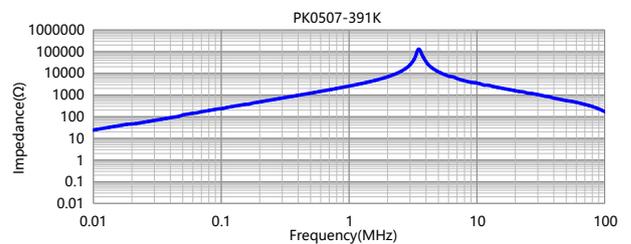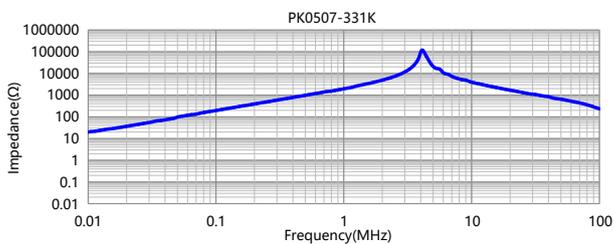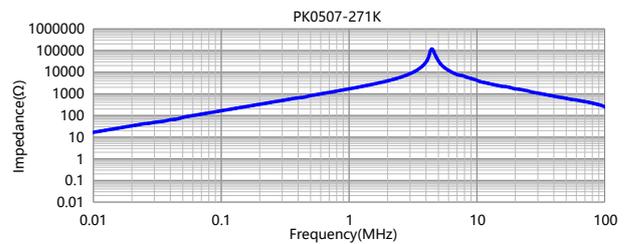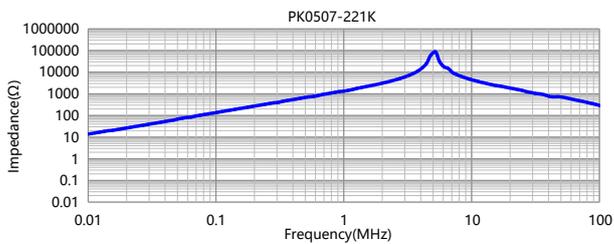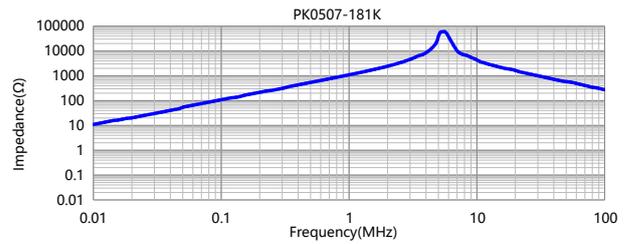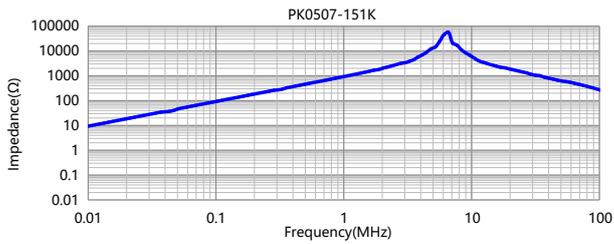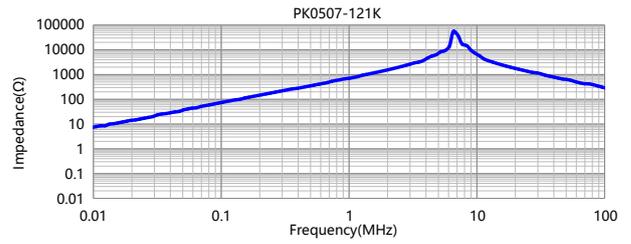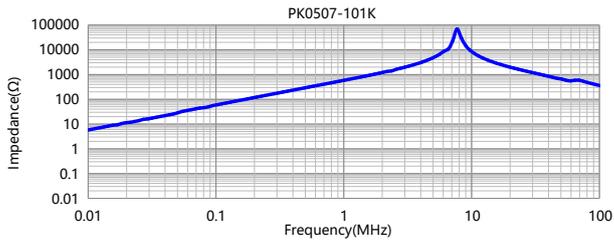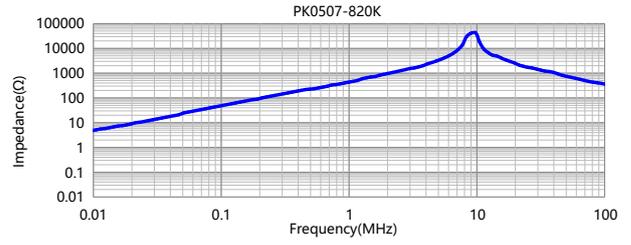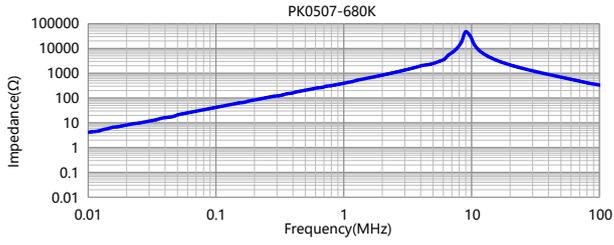

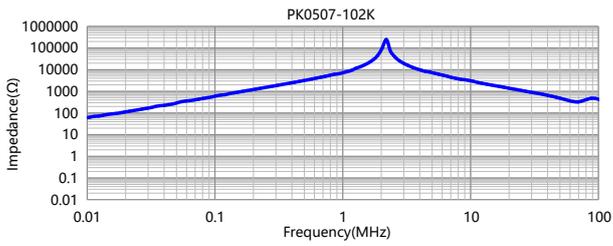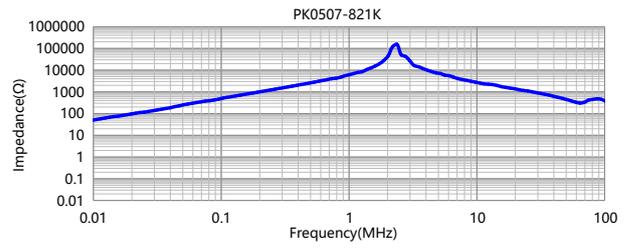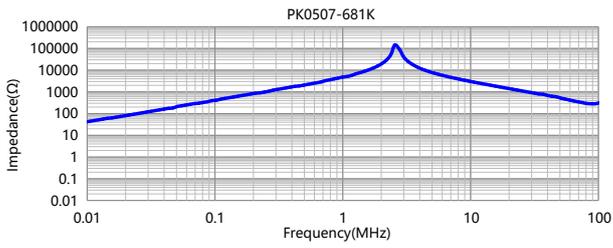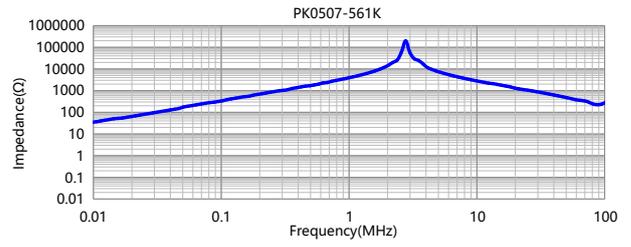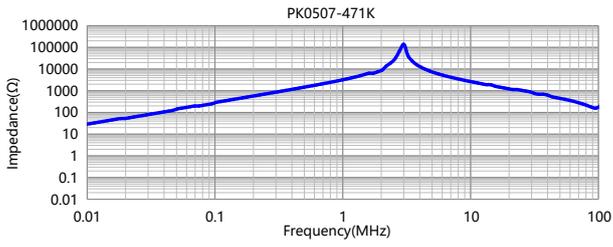

6 Packing Specification

6.1 Packing

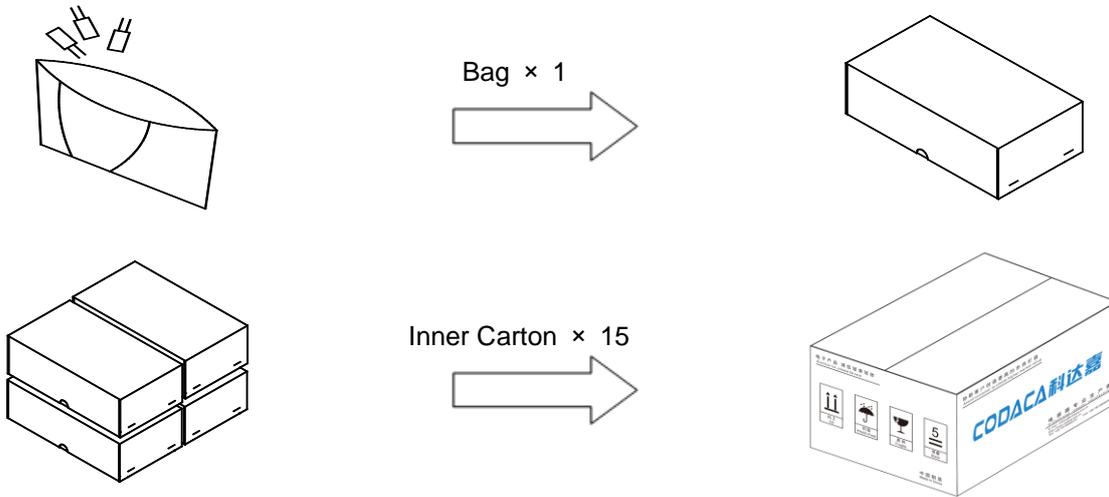

6.2 Carton Dimensions and Packing Quantity

- Inner Carton : 145*80*40mm
- Inner Carton : 260*210*217mm
- Out Carton : 275*232*261mm

Product Series	Quantity / Bag	Inner Carton Quantity	Out Carton Quantity
PK0507	400pcs	(400×15) = 6000pcs	(6000×1) = 6000pcs

6.3 Label Making

The following items will be marked on the tray of product label and shipping label.

Production Label
■ Packing No.
■ Quantity
■ Shipment Date
■ Part No.
■ Customer Part No.
■ Customer Po No.

Shipping Label
■ Packing No.
■ Quantity
■ Shipment Date
■ Part No.
■ Customer Part No.
■ Customer Po No.

7 Notice of Use

- 7.1 Special remind: Circuit design, component placement, PCB size and thickness, cooling system and etc. all will affect the product temperature. Please verify the product temperature in the final application.
- 7.2 Product in packing storage condition: temperature 5 ~ 40°C, RH ≤ 70%.
If taking out for use, the remaining products should be sealed in plastic bags and preserved in accordance with the above conditions, to avoid oxidation of terminals (electrodes), affecting soldering status.
- 7.3 A storage of Codaca Electronic products for longer than 12 months is not recommended, Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- 7.4 Do not keep products in unsuitable storage conditions, such as areas susceptible to high temperatures, high humidity, dust or corrosion.
- 7.5 Always handle products with care.
- 7.6 Don't touch electrodes directly with bare hands as oil secretions may inhibit soldering.
Always ensure optimum conditions for soldering.
- 7.7 When this product will be used on a similar or new project to the original one, sometimes it might be unable to satisfy the specifications due to different condition of usage.
- 7.8 This inductor itself does not have any protective function in abnormal condition, such as overload, short-circuit, open-circuit conditions, etc. Therefore, it shall be confirmed that there is no risk of smoke, fire, dielectric withstand voltage, insulation resistance, etc., or use in abnormal conditions protective devices or protection circuit in the end product.
- 7.9 Hi-Pot test with higher voltage than spec value will damage insulating material and shorten its life.
- 7.10 If using in potting compound, the magnet wire coating might be damaged, please consult with us.
- 7.11 Refrain from rinsing coils. If necessary, please consult with us.
- * 7.12 Codaca Electronic products without "V" prefix are qualified for industrial product requirement, and with "V" prefix are qualified for AEC-Q200, but it doesn't mean that Codaca Electronic products can absolutely meet specific industry norms and quality test standards in automotive electronics or more strict application fields. Codaca Electronic will be exempted from being responsible for the consequences of using Codaca products in automotive electronic or higher application field related to safety when without being aware of it.