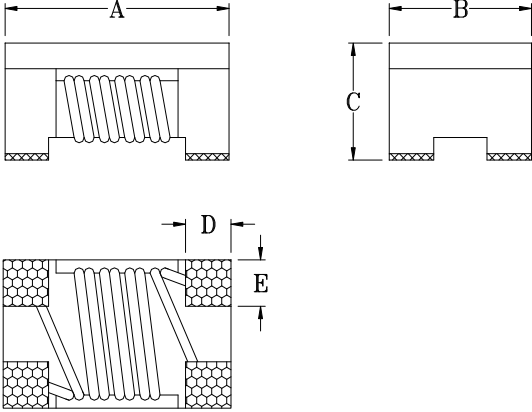


SPECIFICATION FOR APPROVAL

COMMODITY	COMMON MODE CHOKE	SPEC NO.	SP-N251014009
ITEM	JPWC 1206-121 Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)			DIM.	TOL.
		A	3.20	±0.2
		B	1.60	±0.2
		C	1.90	±0.2
		D	0.60	±0.1
		E	0.60	±0.1

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
IMPEDANCE	120 ± 25%	Ω	☒ AGILENT 4294A Precision Impedance Analyzer. ☐ AGILENT 4285A Precision L.C.R. ☐ HP-4286A RF L.C.R. Meter. ☒ ZENTECH 3302 Automatic Components Analyzer. ☐ ZENTECH 101 L.C.R. Meter. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ ZENTECH 502AC Resistance Merter. ☐ ADEX AX-1155B DC Low Ohm Meter.
TEST FREQUENCY	100	MHz	
RDC	0.30 (max)	Ω	
IDC	350 (max)	mA	
Rated Voltage	50 (max)	Vdc	
Withstanding Voltage	125 (max)	Vdc	
Insulation Resistance	10 (min)	MΩ	

REMARK :


. Operating temperature -40~+125°C (Including self - temperature rise)

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			

TEST REPORT

SPEC NO : SP-N251014009

Typical Impedance v.s. Frequency Curve

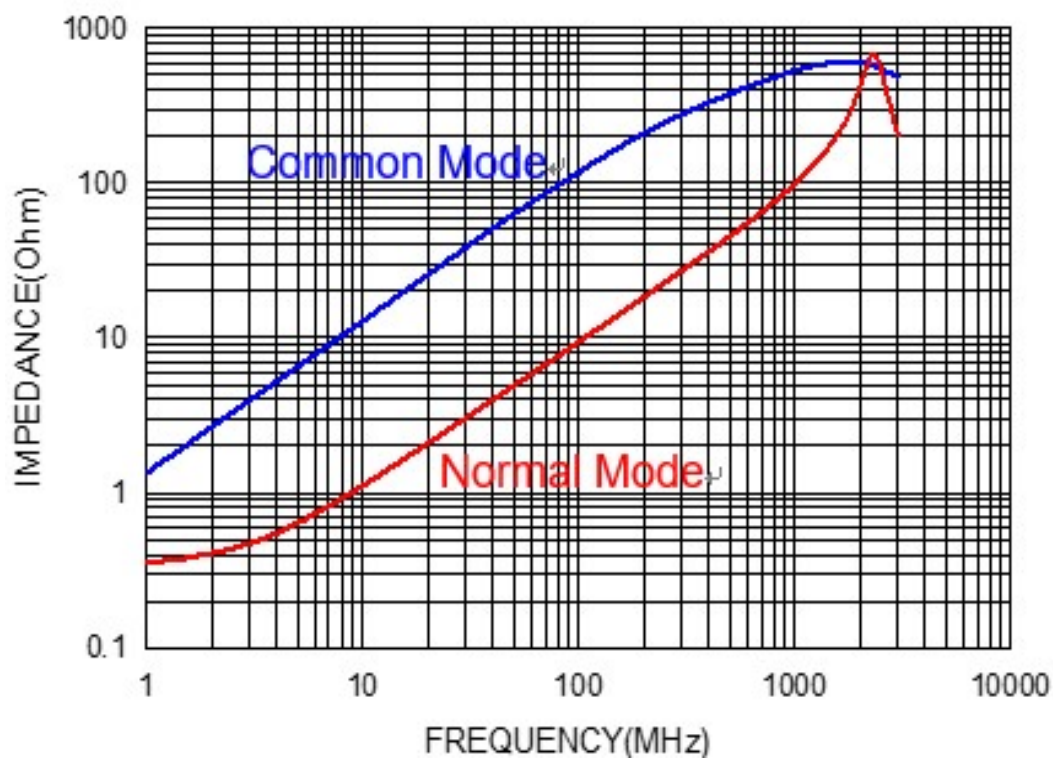

Check by :

鍾
松原

Test by :

陳
秀月