


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

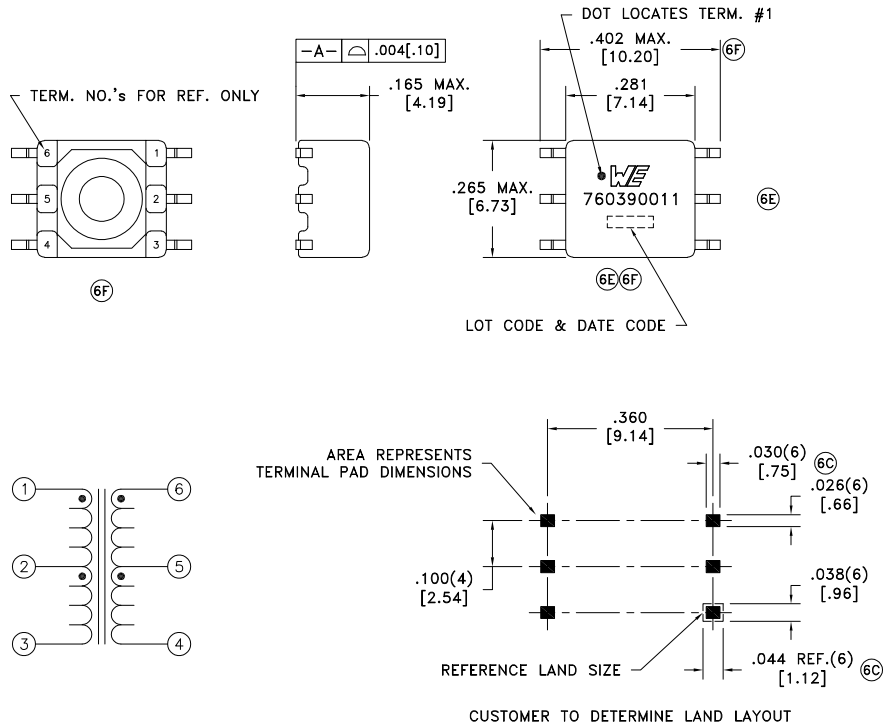

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
(6B) D.C. RESISTANCE 1-3	@20°C	0.46 ohms max.
(6B) D.C. RESISTANCE 6-4	@20°C	0.48 ohms max.
INDUCTANCE 1-3	10kHz, 100mVAC, Ls	1.0mH min.
(6G) INTERWINDING CAPACITANCE 1-6	100kHz, 10mVAC, Cs	12.5pF typ.
DIELECTRIC 1-6	1875VAC, 1 second	1500VAC, 1 minute
(6H) TURNS RATIO	(6-4):(1-3)	1.1:1

GENERAL SPECIFICATIONS:

(6B) OPERATING TEMPERATURE RANGE: -40°C to +125°C.

CURRENT RATING: 100mAAC

VOLTAGE-TIME: 7VuS


(6D) Qualified to AEC-Q200.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

760390011S: (6H)
Packaging Specifications
Method: Tape & Reel
PKG-1346
www.we-online.com/midcom

760390011:

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.005 [.13]	DRAWING TITLE	PART NO.
6J	7/25	Method: Tape & Reel PKG-0895			TRANSFORMER	760390011/S
6H	11/24	www.we-online.com/midcom				
6G	4/21	SEE REVISION SHEET FOR REVISION LEVEL				
6F	12/20					



This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

eiSos p/n: 760390011, 760390011S



SPECIFICATION SHEET 1 OF 1