



Outline:

- Low DC resistance, High rated current.
- Magnetic shielded structure, excellent resistance to electro magnetic interference(EMI).

Features:

- Core material: Ferrite.
- Environmental: RoHS, Reach compliant, Halogen free.
- Weight: 2.22g
- Moisture Sensitivity: Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity).
- Operating temperature range: -40°C ~ +125°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +125°C

Application:

- Ideal for noise filtering in power amplifiers, power supplies and Speaker crossover networks.
- buck converter, network communication equipment, and etc.


Construction Wire



1 Electrical Characteristics

Part No.	Inductance (μH) $\times 1$	D.C.R. (m Ω)		Isat (A) $\times 2$	Irms (A) $\times 3$
		Typ.	Max.		
CRHSM1060-1R4M	1.40 $\pm 20\%$	7.1	8.5	20.10	8.70
CRHSM1060-2R0M	2.00 $\pm 20\%$	8.1	9.7	17.00	8.50
CRHSM1060-2R7M	2.70 $\pm 20\%$	9.1	10.9	14.40	8.00
CRHSM1060-3R6M	3.60 $\pm 20\%$	10.2	12.2	12.50	7.40
CRHSM1060-4R7M	4.70 $\pm 20\%$	13.3	16.0	11.20	6.40
CRHSM1060-5R6M	5.60 $\pm 20\%$	14.5	17.4	9.90	6.00
CRHSM1060-6R8M	6.80 $\pm 20\%$	18.0	21.6	9.00	5.45
CRHSM1060-8R2M	8.20 $\pm 20\%$	19.7	23.6	8.30	5.25
CRHSM1060-100M	10.0 $\pm 20\%$	23.1	27.7	7.60	4.80
CRHSM1060-120M	12.0 $\pm 20\%$	24.5	29.4	7.00	4.55
CRHSM1060-150M	15.0 $\pm 20\%$	32.4	38.8	6.10	3.95
CRHSM1060-180M	18.0 $\pm 20\%$	38.4	46.0	5.75	3.65
CRHSM1060-220M	22.0 $\pm 20\%$	43.5	52.1	5.10	3.45
CRHSM1060-270M	27.0 $\pm 20\%$	53.6	64.3	4.60	3.10
CRHSM1060-330M	33.0 $\pm 20\%$	66.2	79.4	4.20	2.80
CRHSM1060-470M	47.0 $\pm 20\%$	85.5	103	3.53	2.45
CRHSM1060-560M	56.0 $\pm 20\%$	109	131	3.20	2.20
CRHSM1060-680M	68.0 $\pm 20\%$	114	136	2.88	2.13
CRHSM1060-101L	100.0 $\pm 15\%$	165	197	2.40	1.78
CRHSM1060-121L	120.0 $\pm 15\%$	202	242	2.15	1.59
CRHSM1060-151L	150.0 $\pm 15\%$	254	304	1.95	1.42
CRHSM1060-221L	220.0 $\pm 15\%$	362	434	1.60	1.19
CRHSM1060-331L	330.0 $\pm 15\%$	546	655	1.31	0.96
CRHSM1060-471L	470.0 $\pm 15\%$	784	941	1.10	0.80
CRHSM1060-561L	560.0 $\pm 15\%$	939	1127	1.02	0.73
CRHSM1060-681L	680.0 $\pm 15\%$	1140	1368	0.91	0.66
CRHSM1060-102K	1000 $\pm 10\%$	1685	2022	0.75	0.54

2 Product Dimensions (mm)

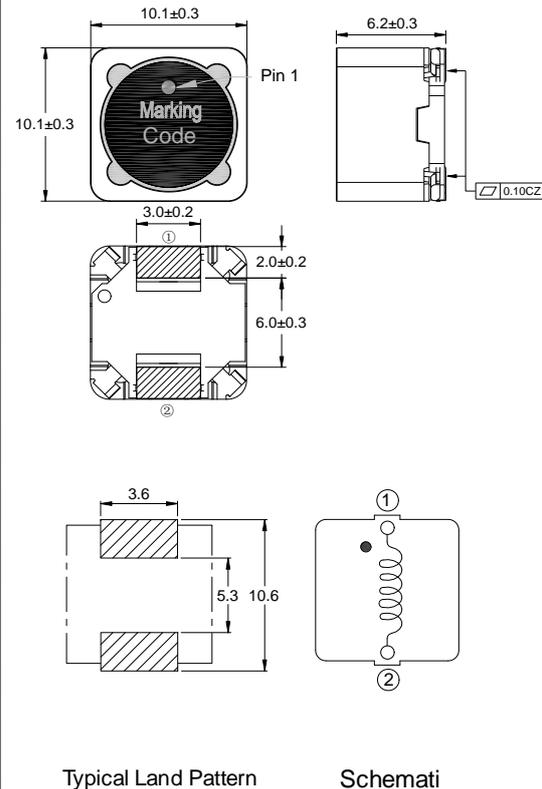









Typical Land Pattern









Schemati









All data is tested on 25°C ambient temperature




- ※1 Inductance measure condition at 100kHz, 0.1V.
- ※2 Saturation current : the actual value of DC current when the inductance decrease 10% and 30% of its initial value.
- ※3 Temperature rise current : the actual value of DC current when the temperature rise is $\Delta T 40^\circ\text{C}$ ($T_a=25^\circ\text{C}$).
- ※ Special remind : Circuit design, component placement, PCB size and thickness, cooling system and etc. all will affect the product temperature. Please verify the product temperature in the final application.

3 Saturation Current vs Temperature Rise Current Curve

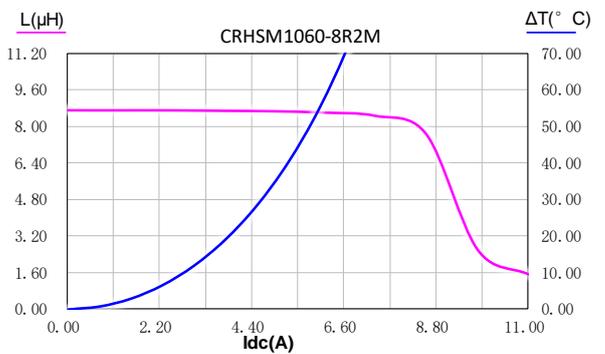
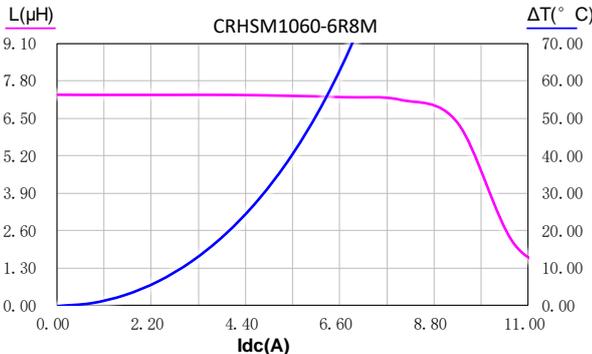
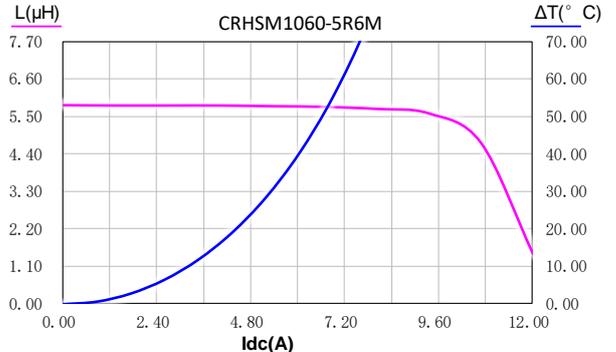
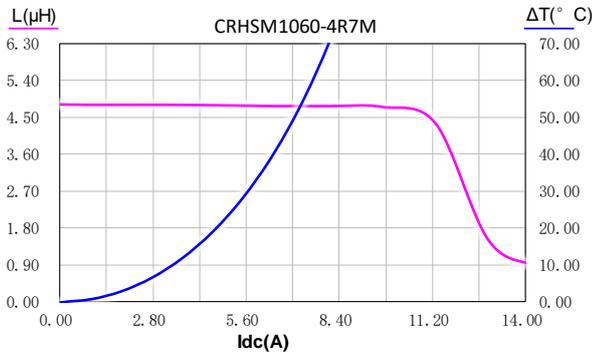
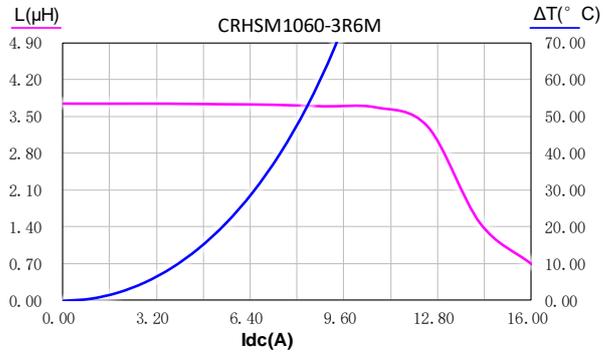
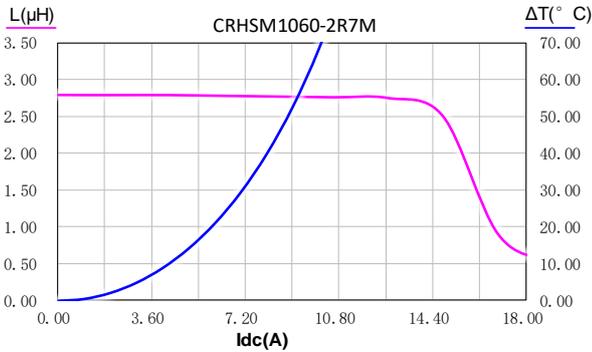
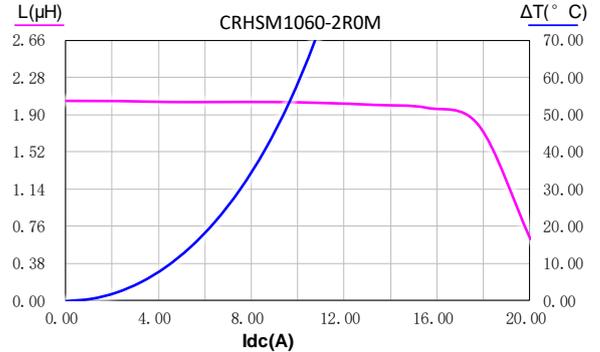
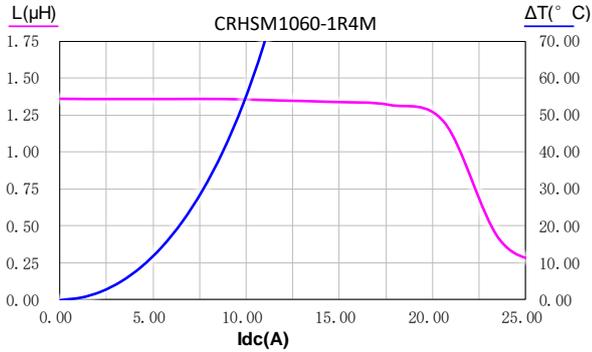


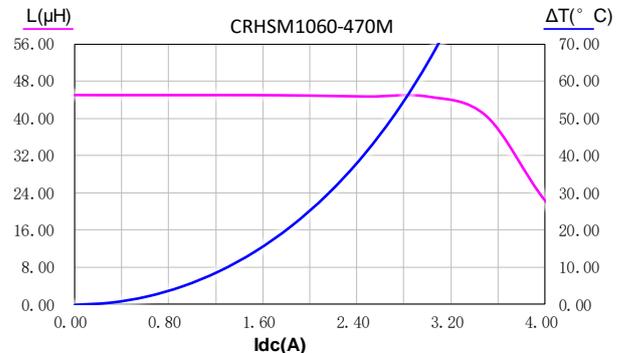
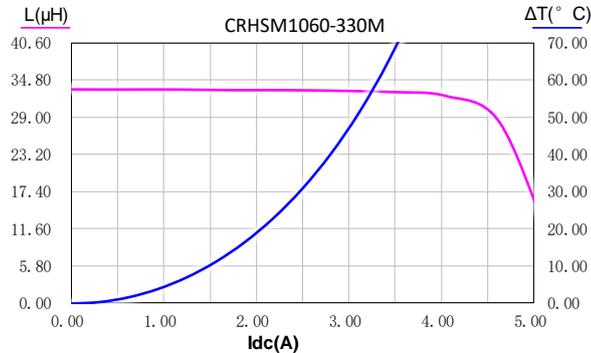
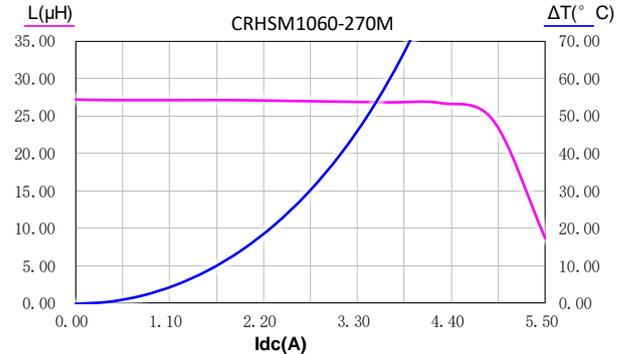
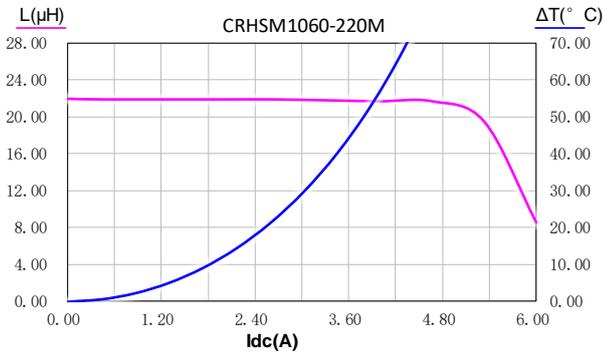
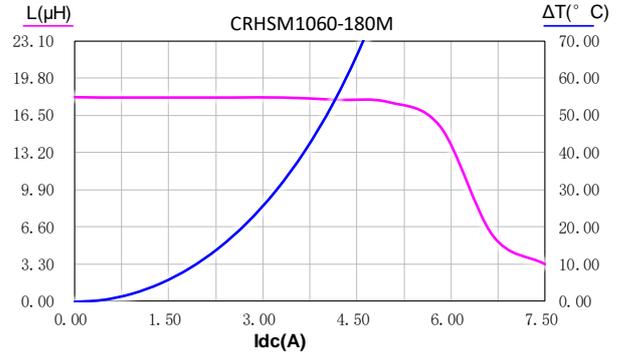
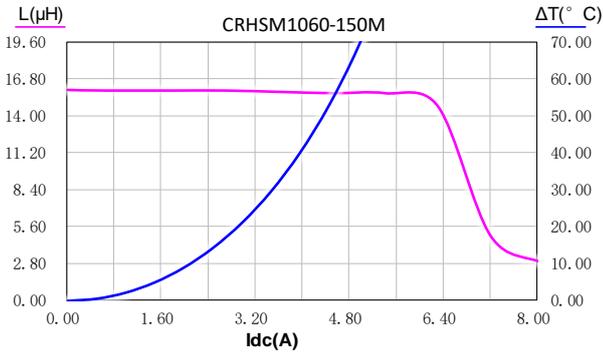
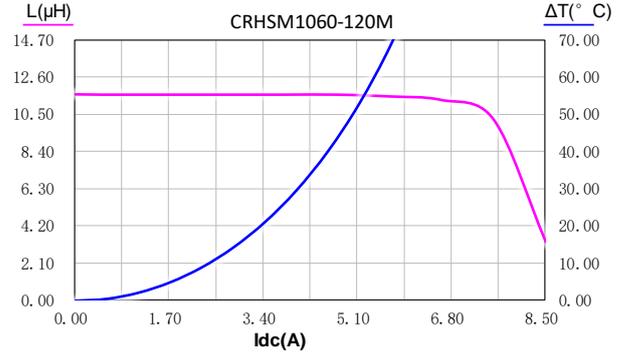
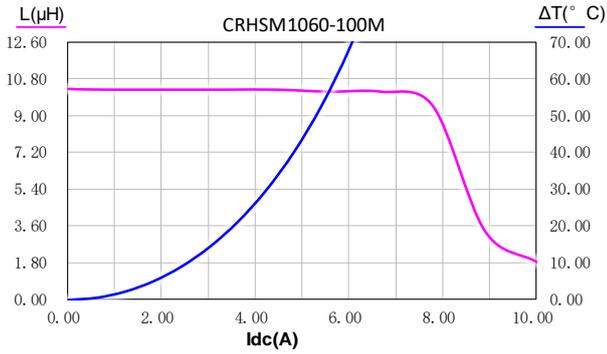


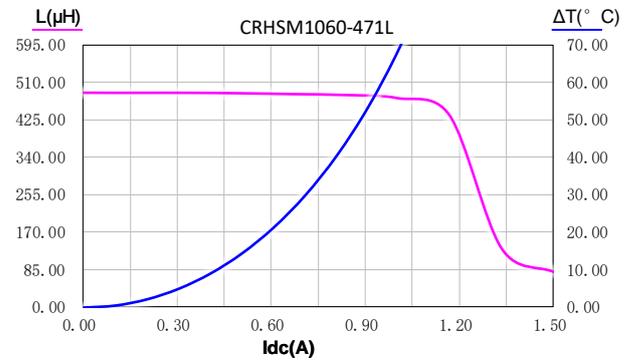
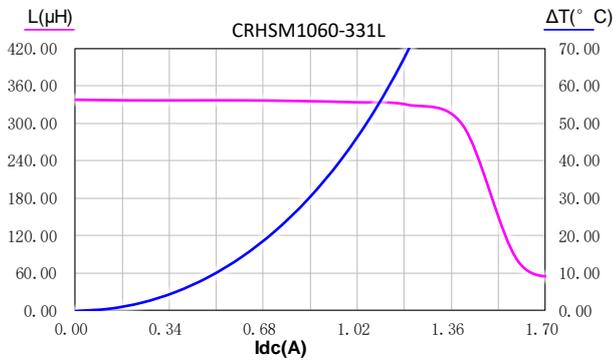
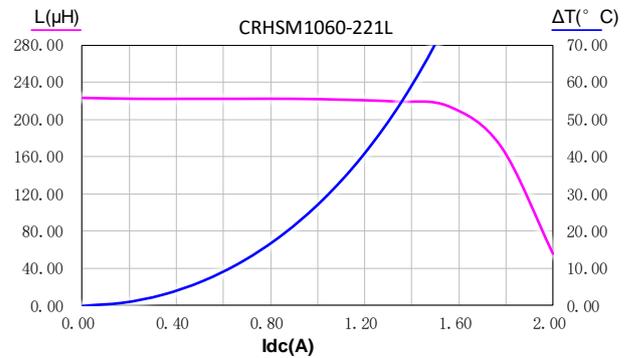
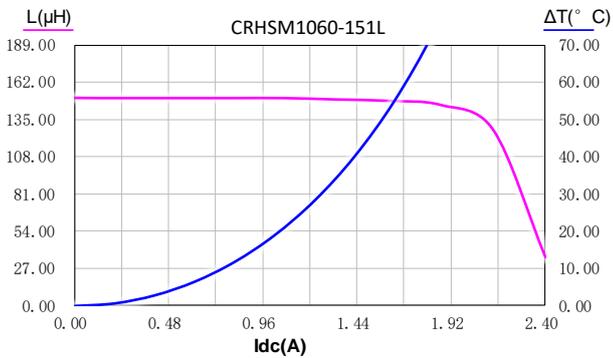
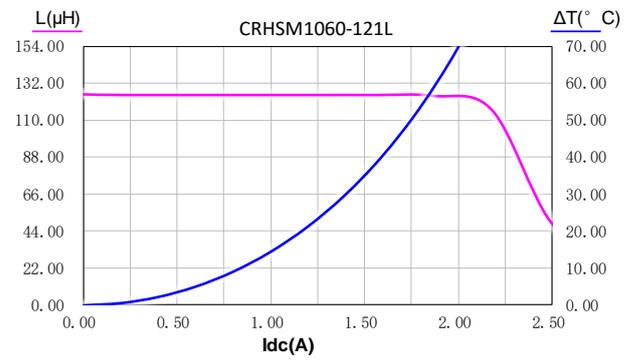
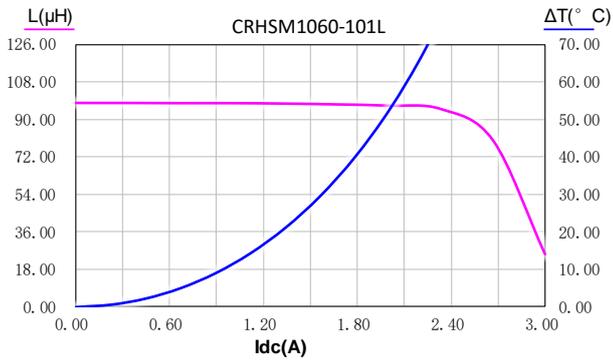
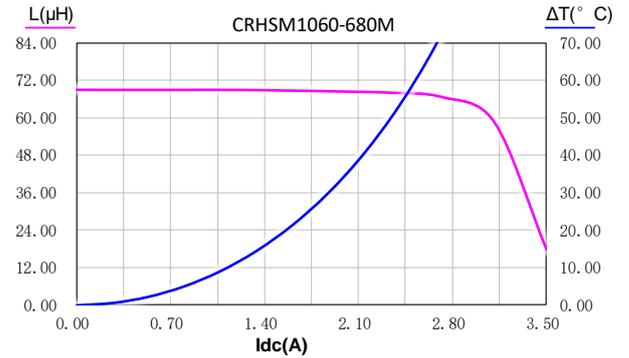
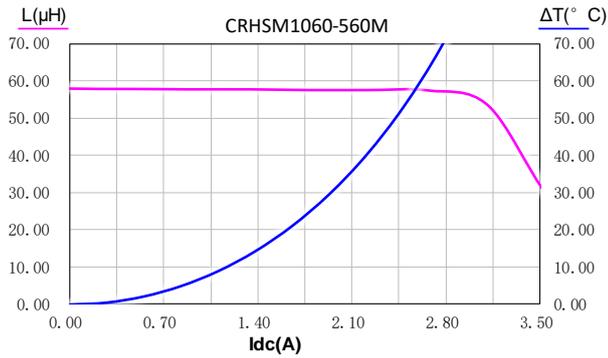


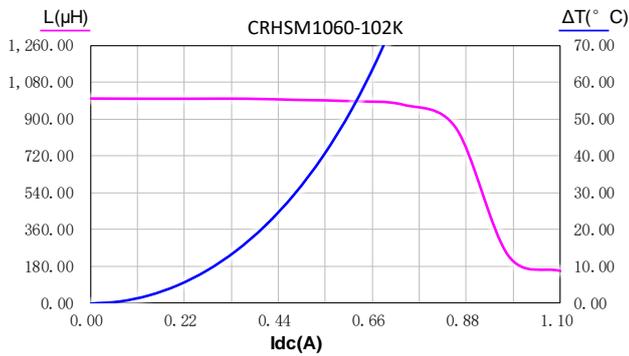
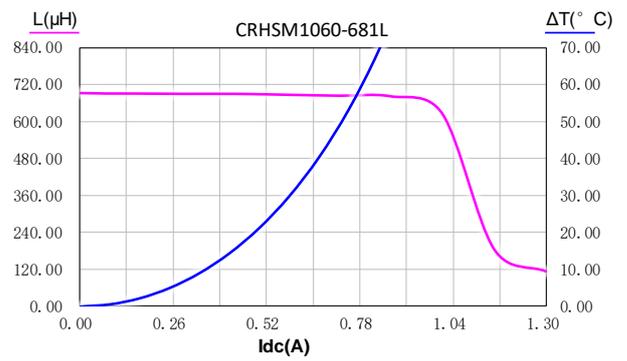
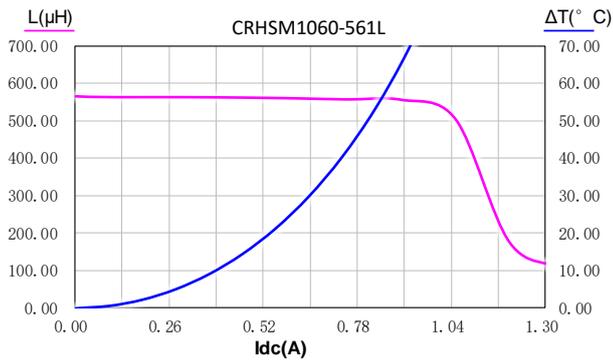


4 L vs Frequency Curve

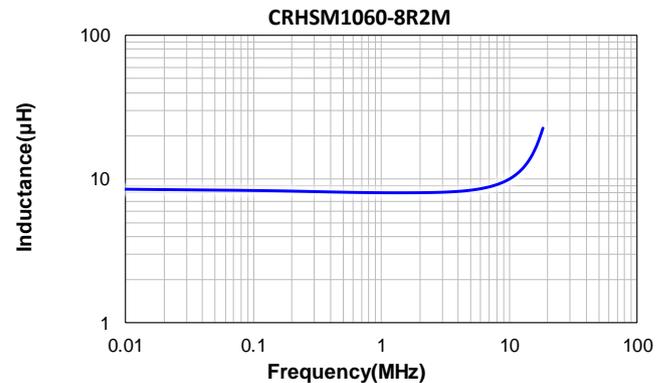
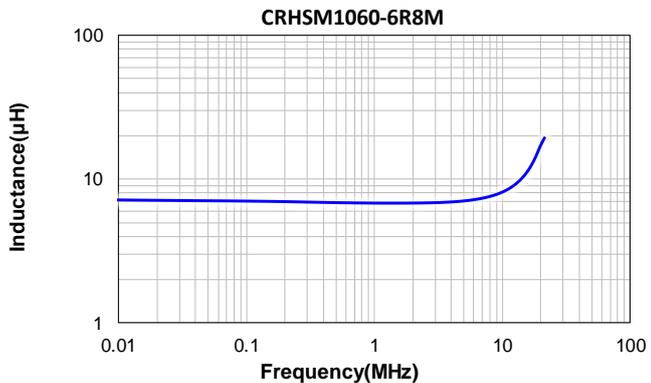
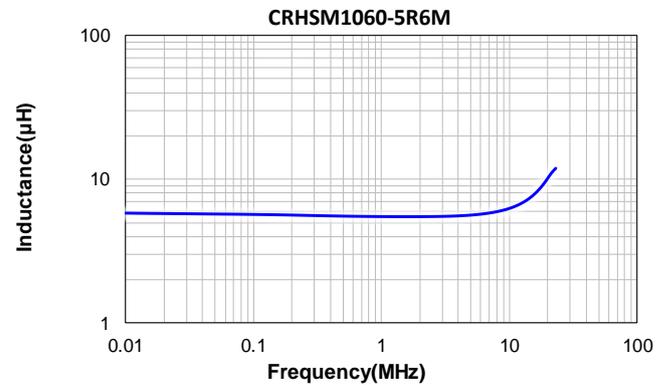
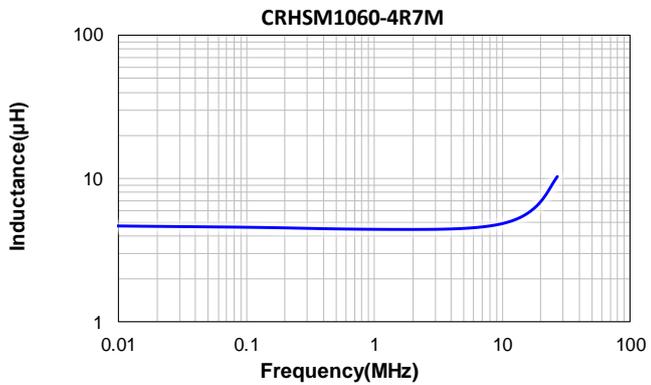
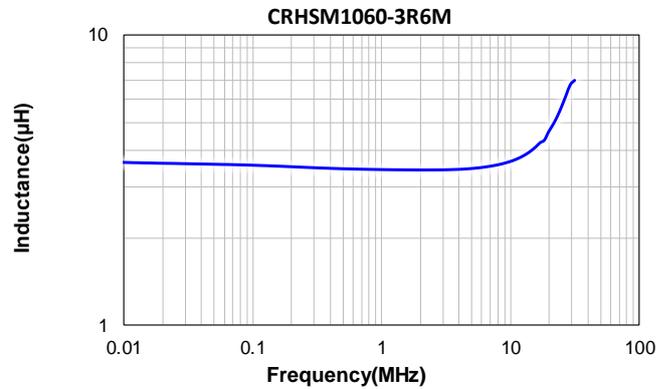
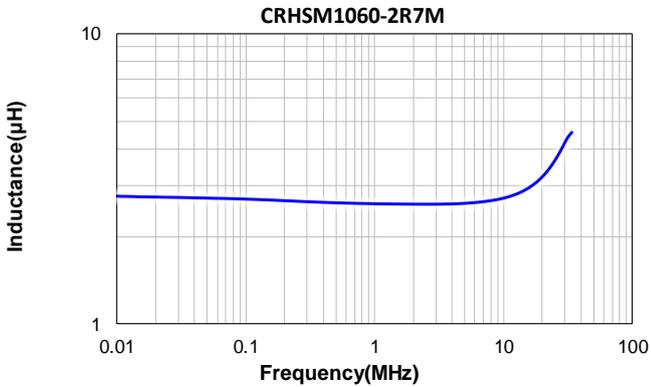
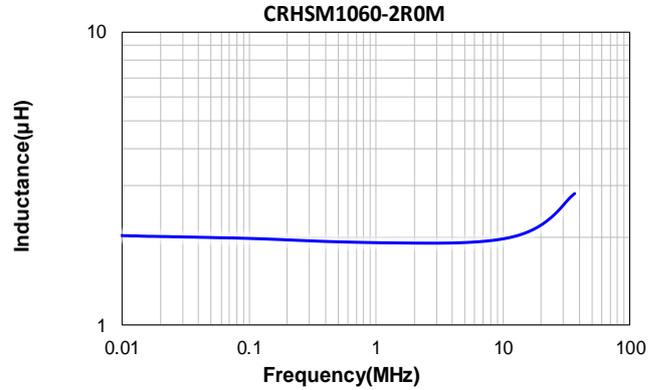
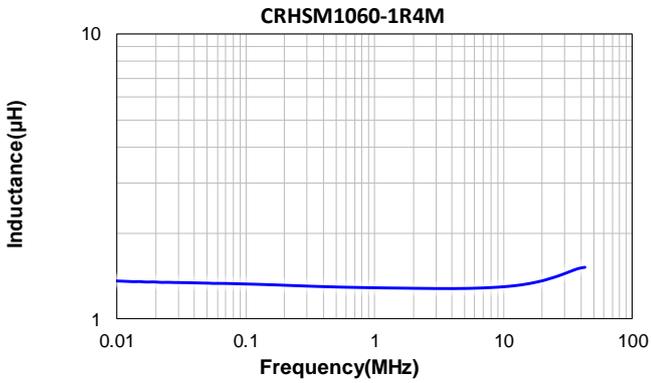


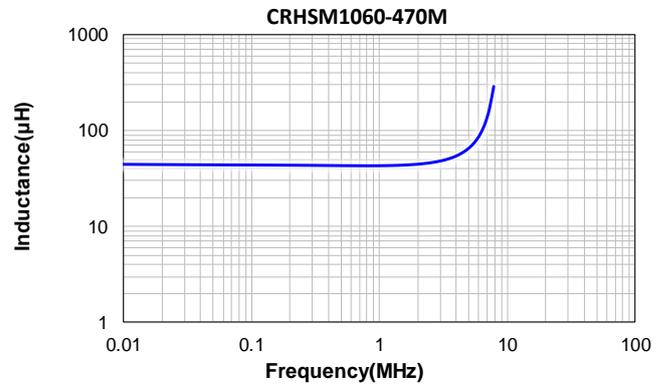
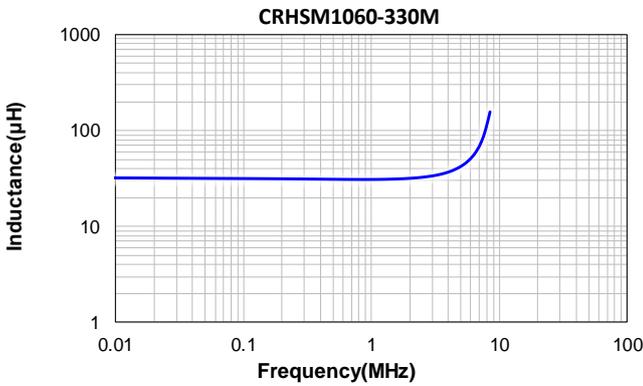
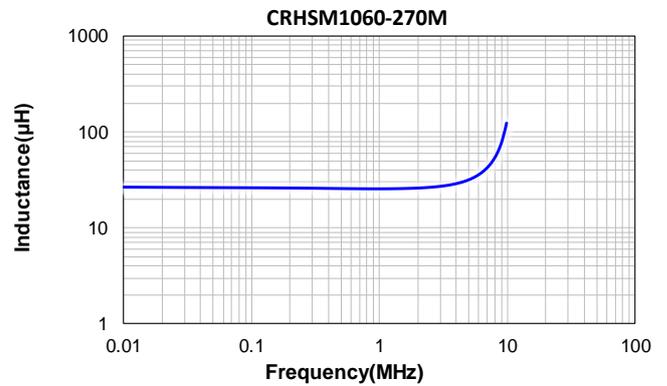
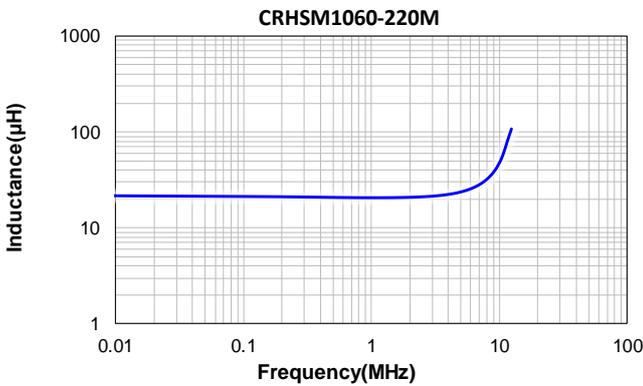
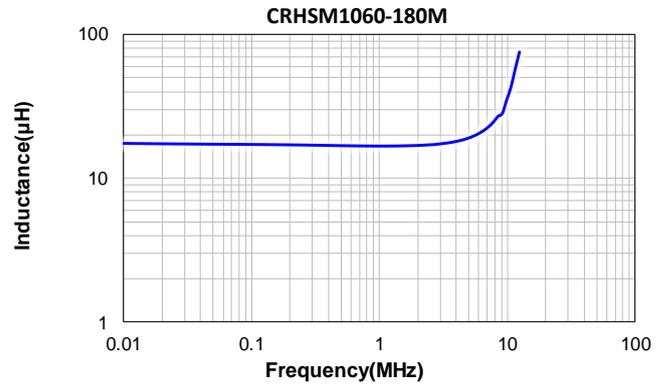
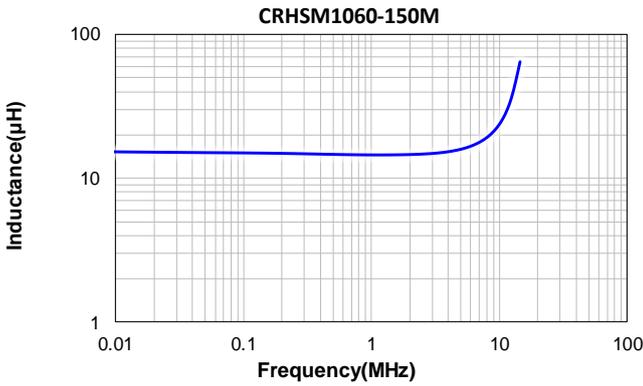
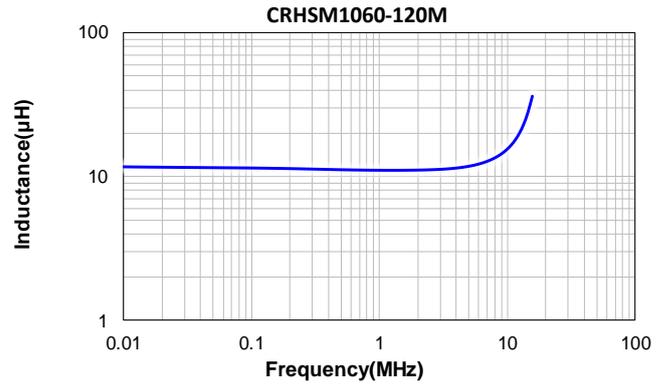
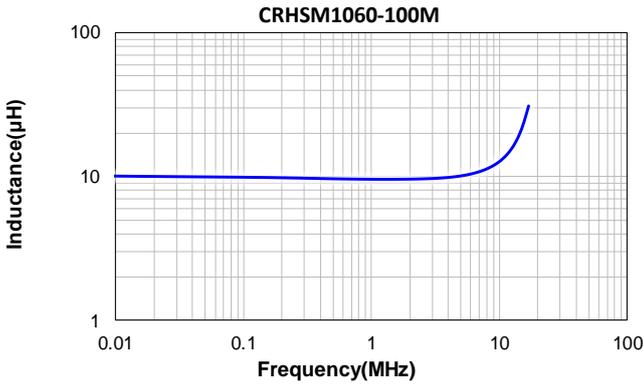


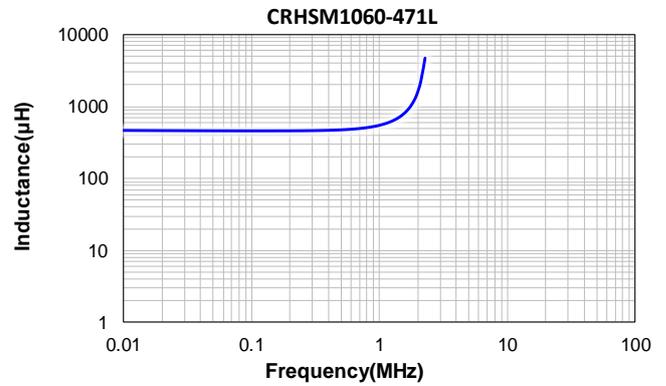
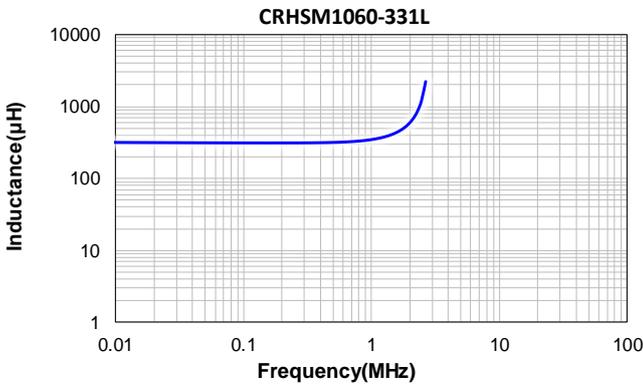
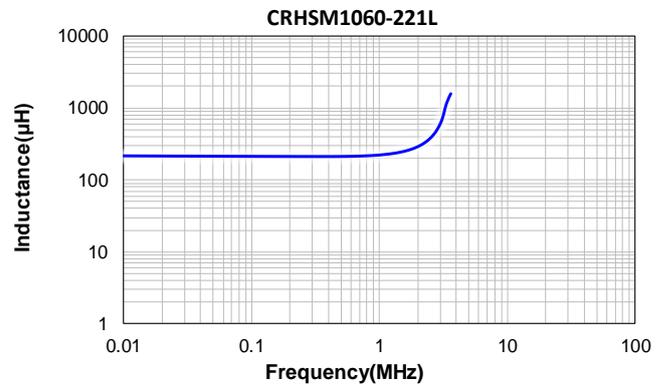
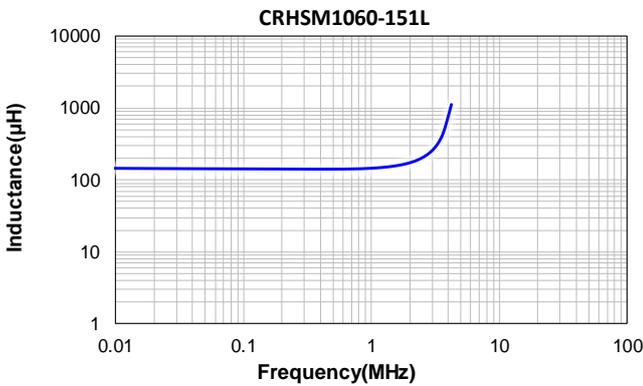
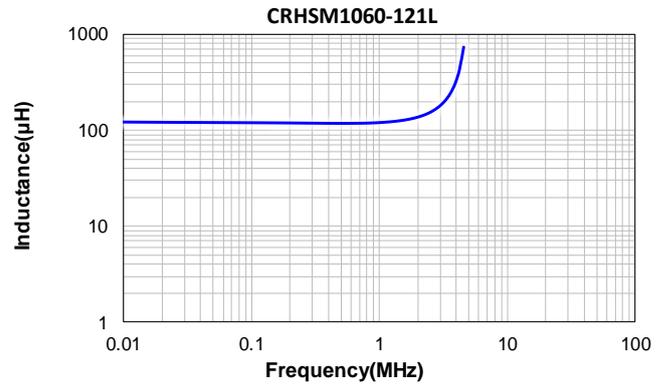
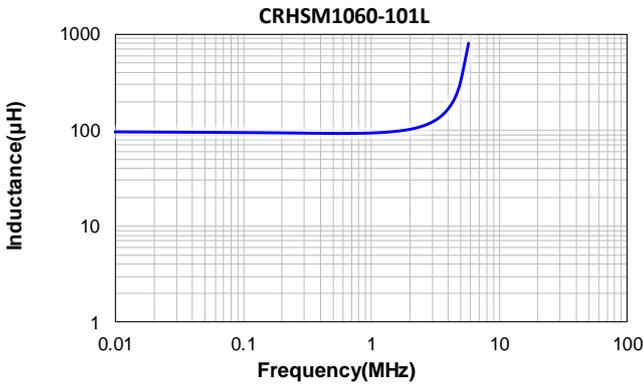
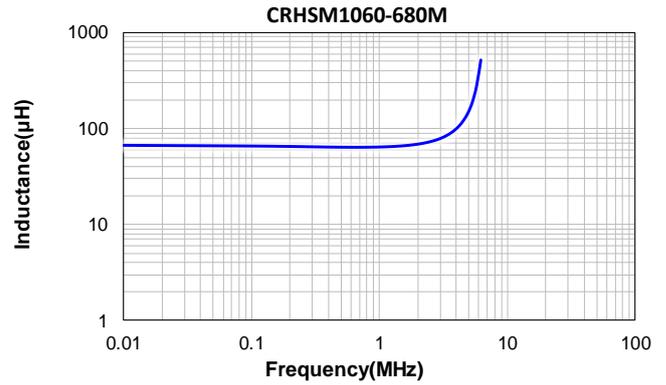
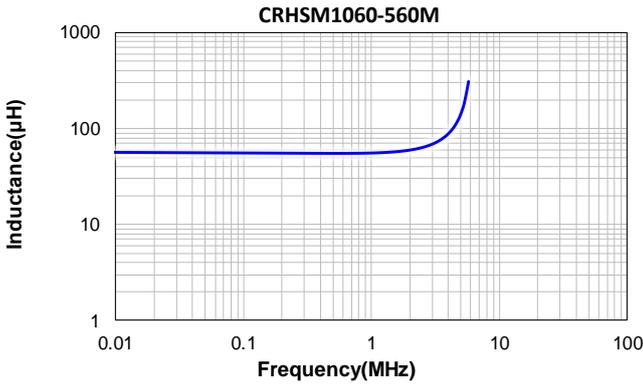


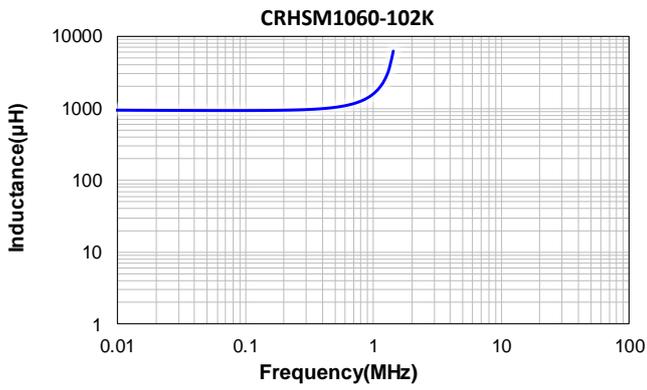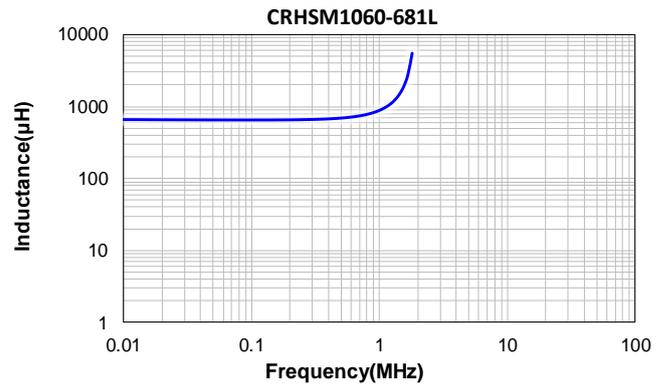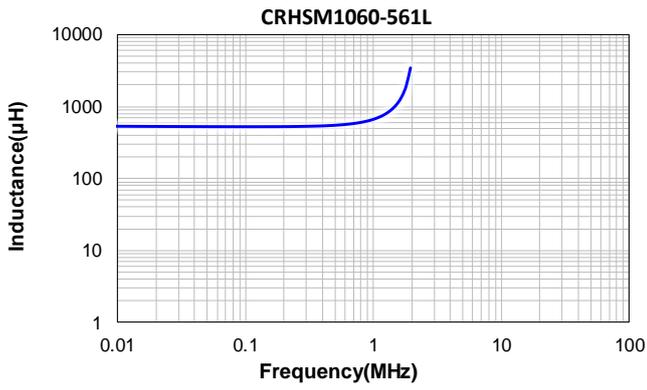


5 Impedance vs Frequency Curve

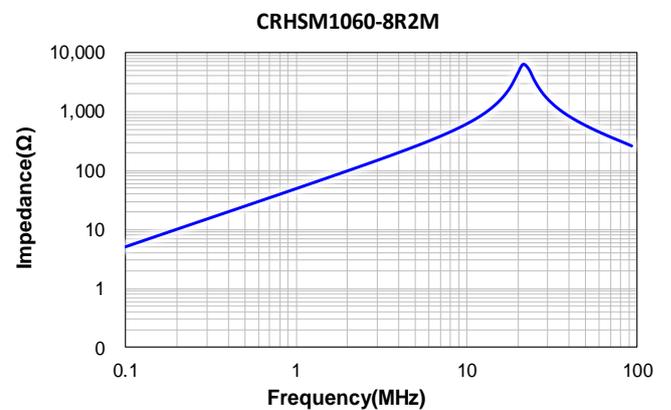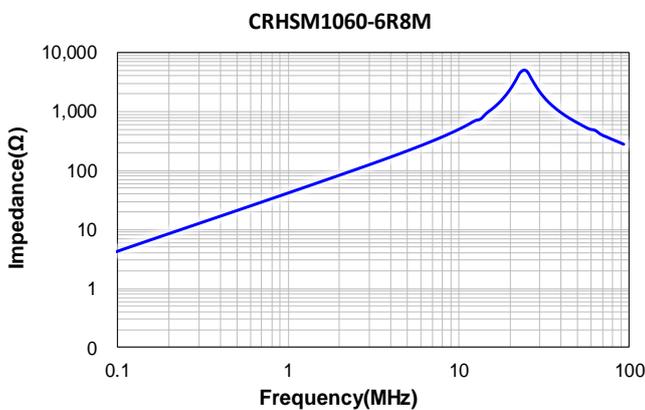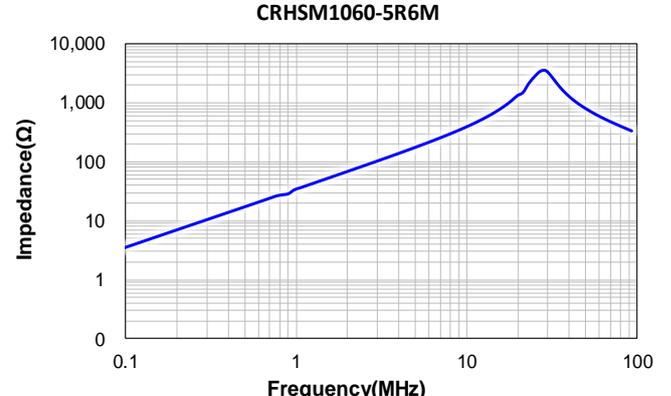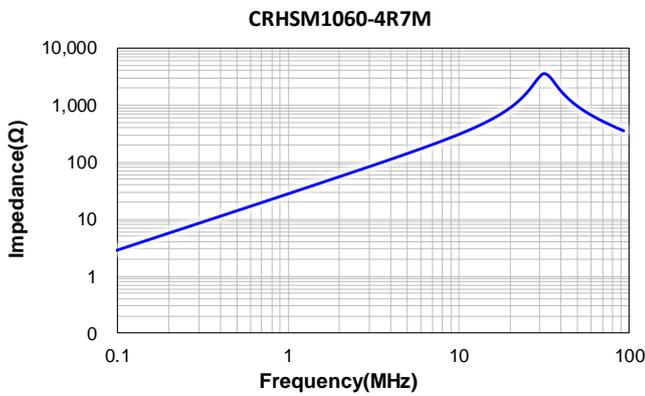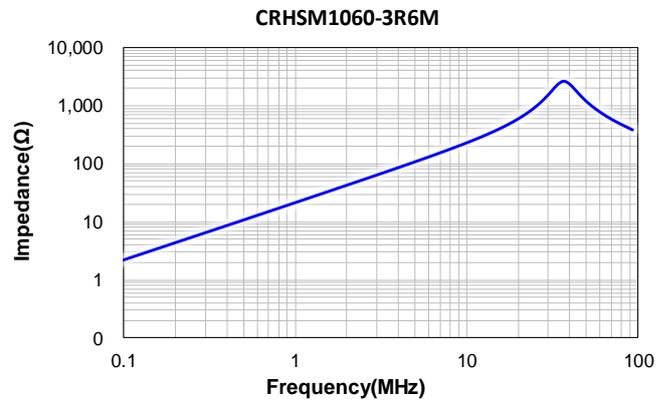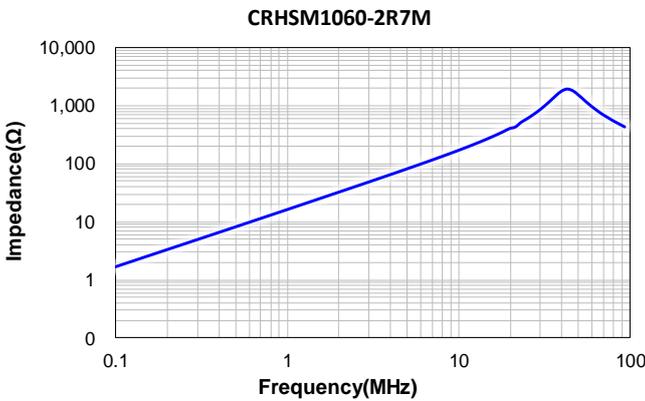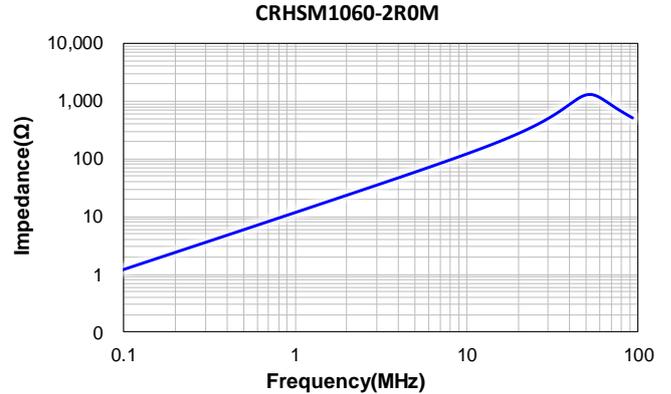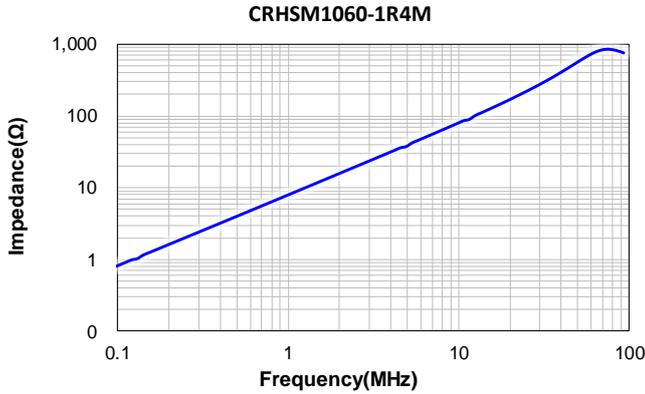

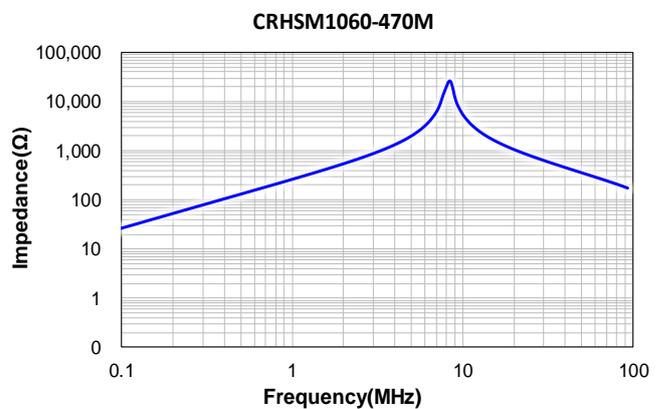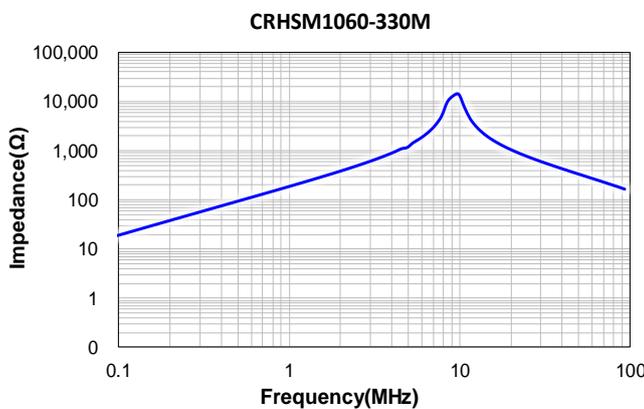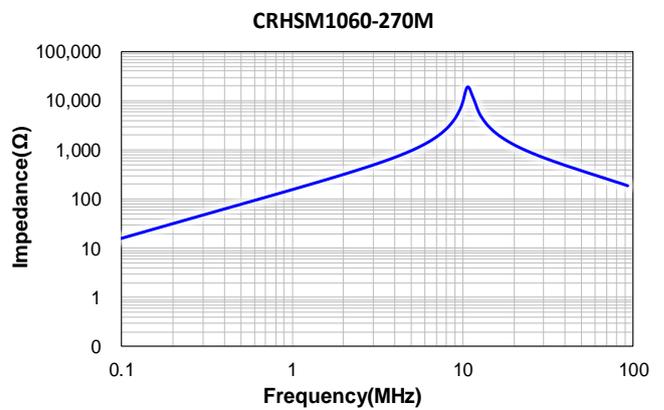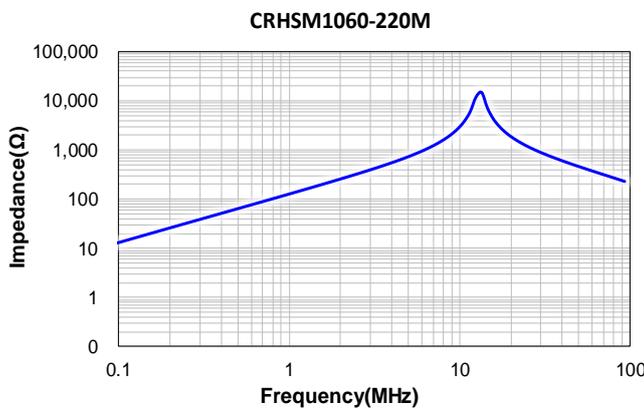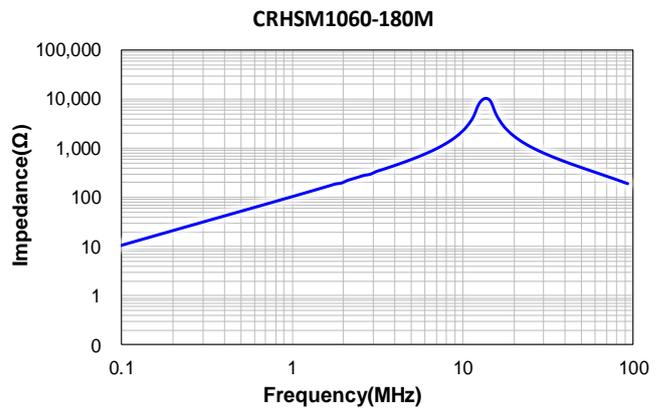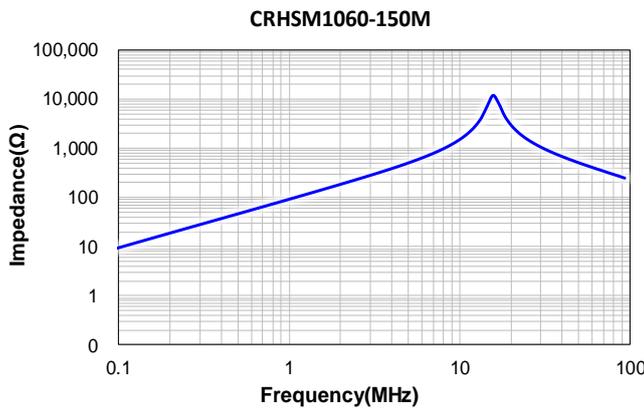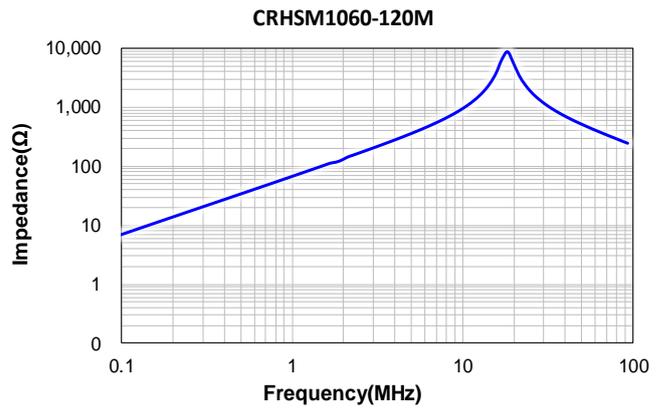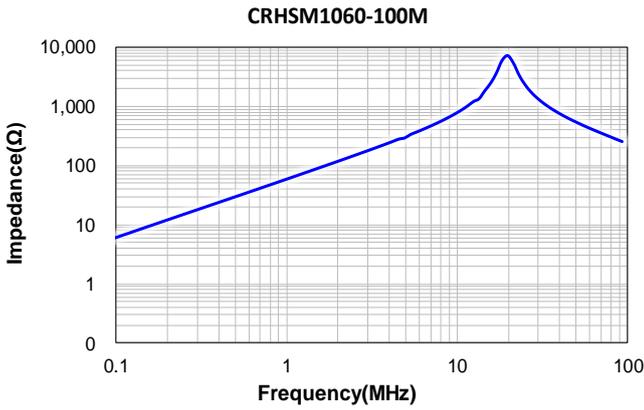


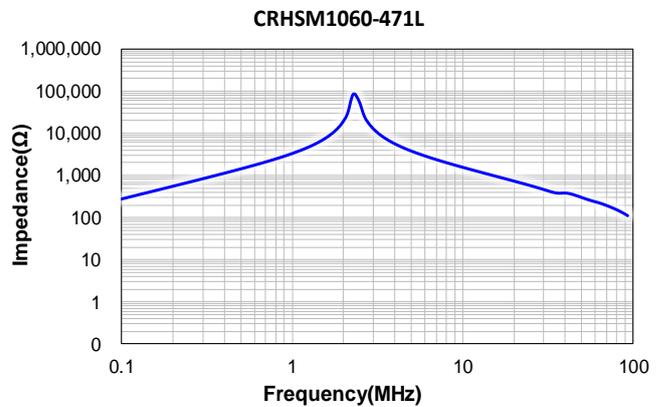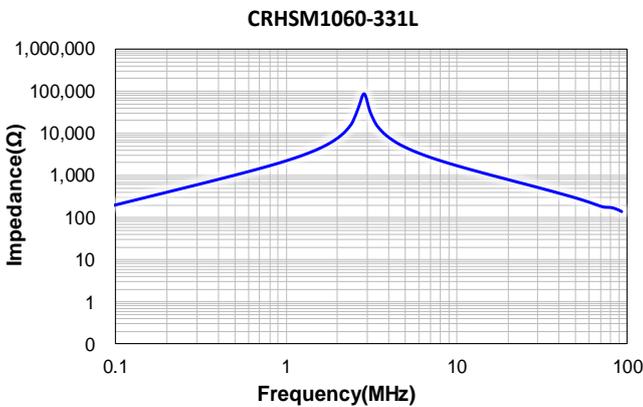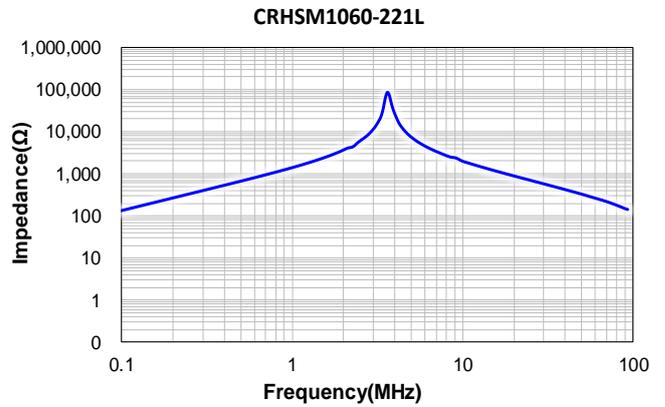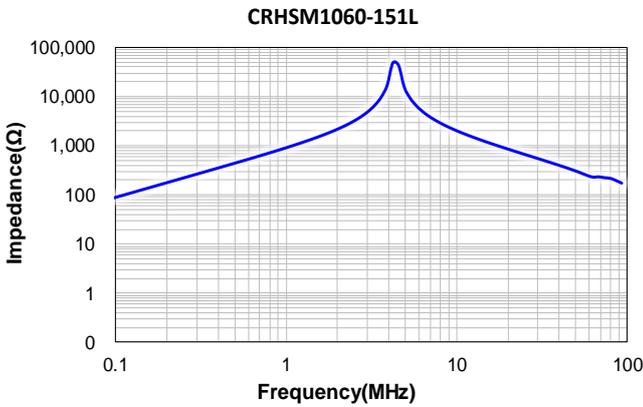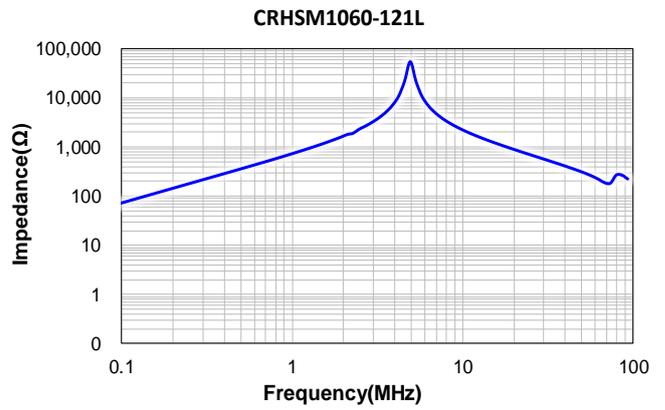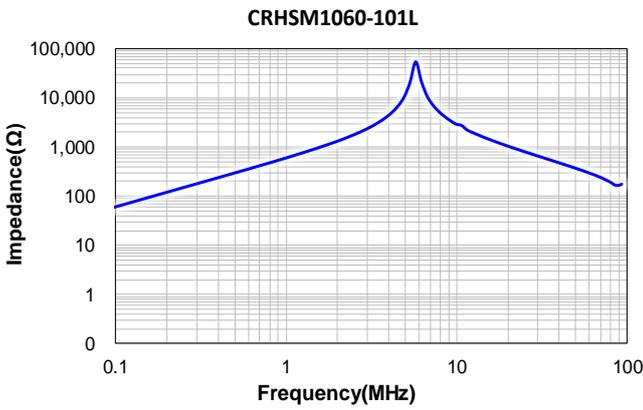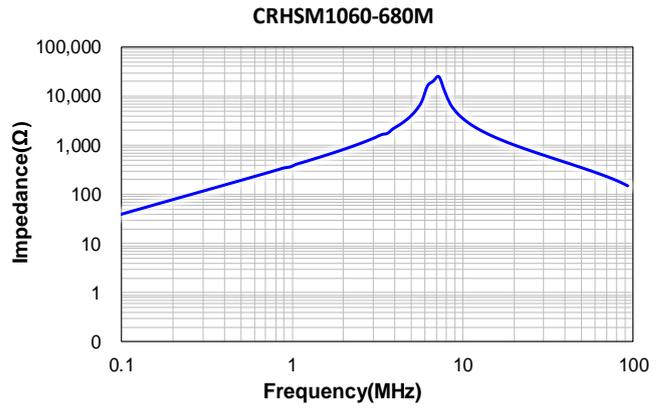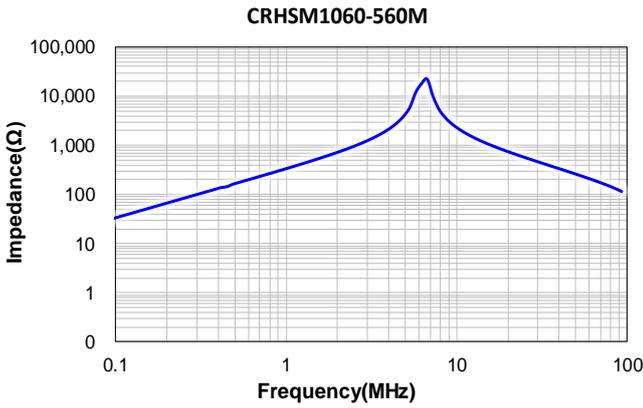


CRHSM1060-561L

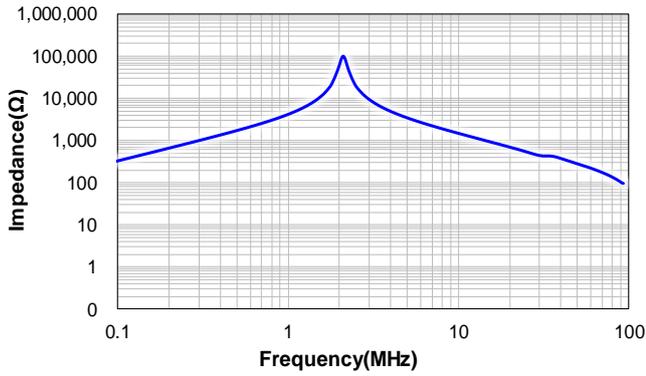

CRHSM1060-681L

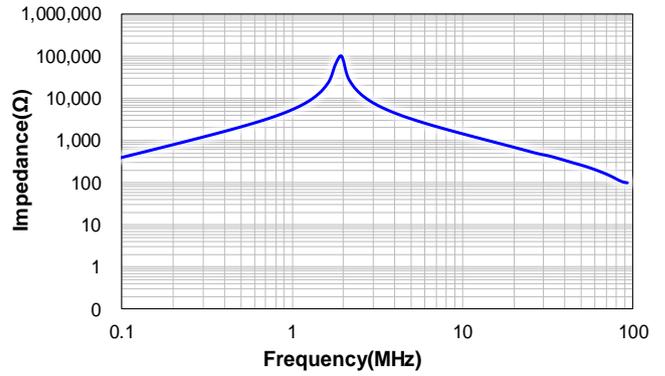


CRHSM1060-102K

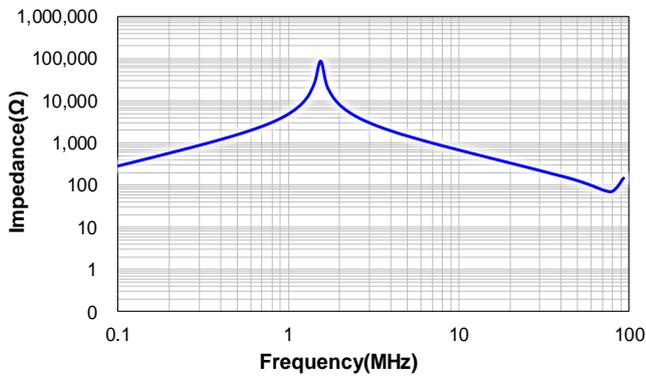


6 Packing Specification

6.1 Carrier Tape Dimensions (mm)

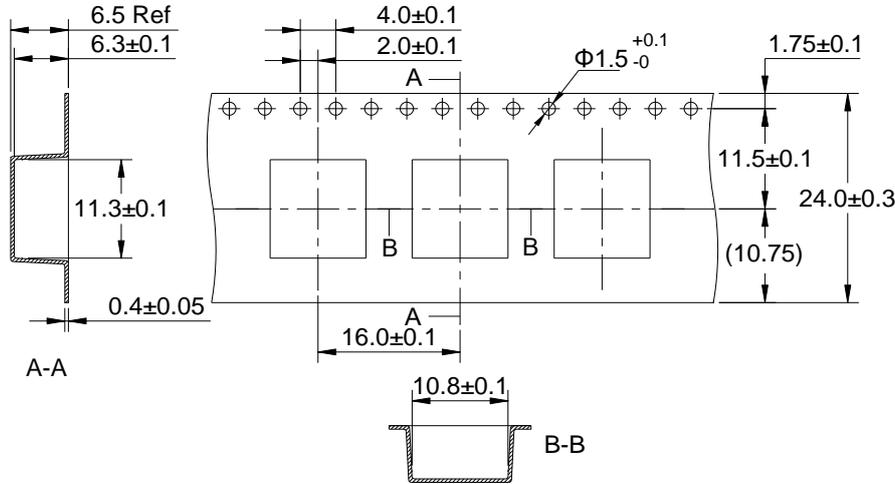

※ Packing is referred to the international standard IEC 60286-3.

6.2 Reel Dimensions (mm)

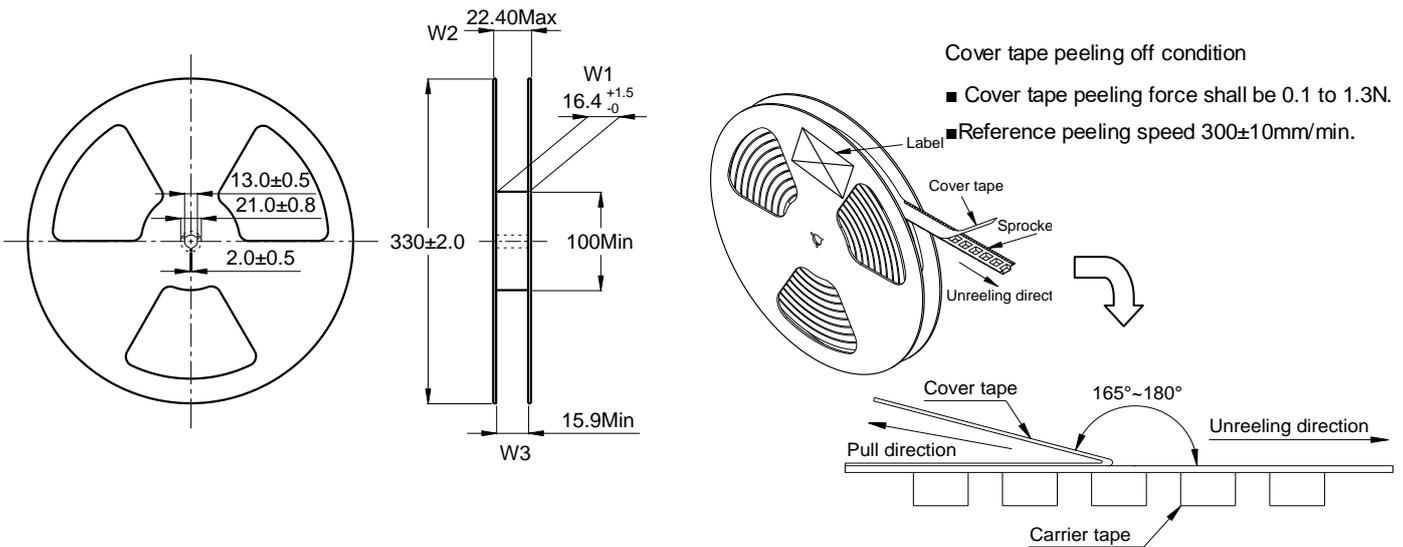


6.3 Carton Dimensions and Packing Quantity

- Inner Carton : 340×340×95mm
- Out Carton : 360×360×370mm

Product Series	Quantity / Reel	Inner Carton Quantity	Out Carton Quantity
CRHSM1060-Serise	400pcs	(400×2) = 800pcs	(800×3) = 2400pcs

7 Soldering Specification

7.1 Reflow Profile for SMT Components

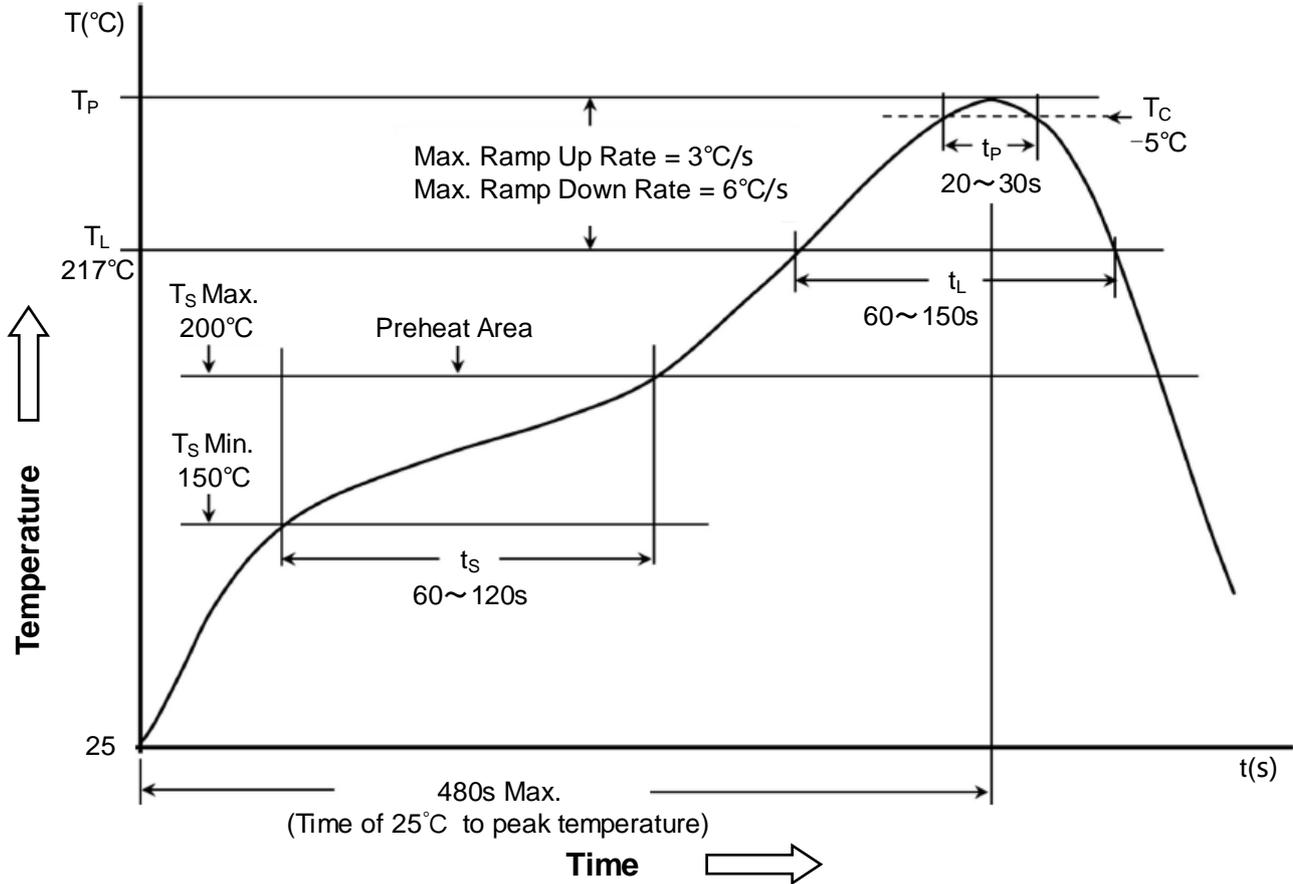

7.2 Classification of Peak Package Body Temperature (Tp)

	Package Thickness	Package Volume		
		<350 mm ³	350 ~ 2000 mm ³	>2000 mm ³
PB-Free Assembly	<1.6mm	260°C	260°C	260°C
	1.6 ~ 2.5mm	260°C	250°C	245°C
	≥2.5mm	250°C	245°C	245°C

※ Reflow is referred to standard IPC/JEDEC J-STD-020E.

8 Notice of use

- 8.1 Product in packing storage condition : temperature 5 ~ 40°C, RH≤ 70%.
If taking out for use, the remaining products should be sealed in plastic bags and preserved in accordance with the above conditions, to avoid oxidation of terminals (electrodes), affecting soldering status.
- 8.2 A storage of Codaca Electronic products for longer than 12 months is not recommended, Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- 8.3 Do not keep products in unsuitable storage conditions, such as areas susceptible to high temperatures, high humidity, dust or corrosion.
- 8.4 Always handle products with care.
- 8.5 Don't touch electrodes directly with bare hands as oil secretions may inhibit soldering.
Always ensure optimum conditions for soldering.
- 8.6 When this product will be used on a similar or new project to the original one, sometimes it might be unable to satisfy the specifications due to different condition of usage.
- 8.7 This inductor itself does not have any protective function in abnormal condition, such as overload, short-circuit, open-circuit conditions, etc. Therefore, it shall be confirmed that there is no risk of smoke, fire, dielectric withstand voltage, insulation resistance, etc., or use in abnormal conditions protective devices or protection circuit in the end product.
- 8.8 Hi-Pot test with higher voltage than spec value will damage insulating material and shorten its life.
- 8.9 If using in potting compound, the magnet wire coating might be damaged, please consult with us.
- 8.10 Refrain from rinsing product. If necessary, please consult with us.
- *8.11 Codaca Electronic products without "V" prefix are qualified for industrial product requirement , and with "V" prefix are qualified for AEC-Q200, but it doesn't mean that Codaca Electronic products can absolutely meet specific industry norms and quality test standards in automotive electronics or more strict application fields . Codaca Electronic will be exempted from being responsible for the consequences of using Codaca products in automotive electronic or higher application field related to safety when without being aware of it.