


Construction

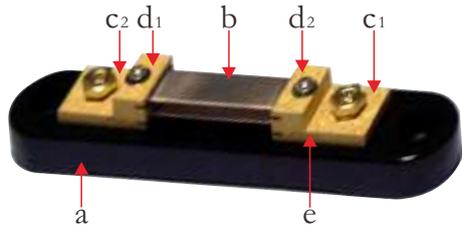

a	Insulating base
b	Precision manganin
c1,c2	Input terminal
d1,d2	Output terminal
e	Copper base


Features

- I High reliability
- II High over loading ability
- III Extremely low inductance

Applications

- I Used for extending the current range of measure
- II Current balance or sampling for testing
- III Automation control to limit the current

Dimensions, Applications And Ratings

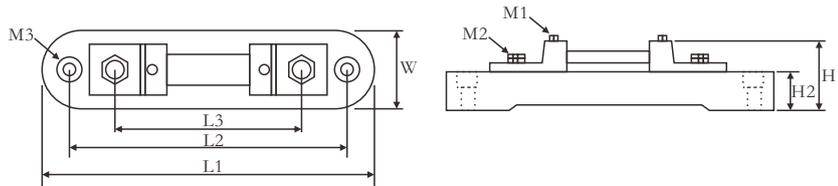

TYPE	Voltage type	Dimensions(mm)									Weight (g)
		L1 ± 1.0	L2 ± 1.0	L3 ± 1.0	W ± 1.0	H1 ± 0.5	H2 ± 0.5	M3 ± 0.3	M1 ± 0.3	M2 ± 0.3	
STF	50/60/75mv 1A~25A 1A~125A	135	110	72	30	24	16	6	3	6	140
	60mv/75mv 30A~125A	150	125	84	30	30	16	6	3	6	140
	60mv/75mv 30A~125A	150	125	88	30	30	16	6	3	6	140

Ordering Information

Example:

STF	100A	50mv	D	C	B
(1)	(2)	(3)	(4)	(5)	(6)
Series Name	Rated Current	Rated Drop	Resistance Tolerance	T.C.R	Packing

(1) Type: STF SERIES

(2) Rated Current: 125=125A, 100=100A, 75=75A, 50=50A, 25=25A

(3) Rated Drop: 50=50mV, 60=60mV, 70=70mV, 100=100mV, 150=150mV

(4) Resistance Tolerance: D= ± 0.5%

(5) T.C.R: C3= ± 25ppm, C4= ± 20ppm, C5= ± 15ppm

(6) Packing: B=bulk standard

● Reference Standards

JISC 5201-1

● Performance

Test Items	Test Methods(JIS C 5201-1)
Tolerance Accuracy class	0.5
Ambient temperature&Relative humidity	-40~+60°C Relative Humidity≤95%(at35°C)
Overload	Rating current120%,2h
Voltage outputs	50mv ,60mv ,75mv ,100mv ,150mv products are available
Surface temperature rise	not over than 80°C within 50A, not exceed 120°C if higher than 50A
Temperature coefficient	$\pm 25 \times 10^{-6} \text{ } ^\circ\text{C}$; $\pm 50 \times 10^{-6} \text{ } ^\circ\text{C}$; $\pm 100 \times 10^{-6} \text{ } ^\circ\text{C}$;