

**Metallized Polypropylene (PP) Capacitors**  
**in PCM 7.5 mm to 37.5 mm. Capacitances from 0.01  $\mu\text{F}$  to 68  $\mu\text{F}$ .**  
**Rated Voltages from 100 VDC to 1250 VDC.**

## Special Features

- High volume/capacitance ratio
- Self-healing
- Very low dissipation factor
- Negative capacitance change versus temperature
- Very low dielectric absorption
- AEC-Q200 qualified
- According to RoHS 2015/863/EU

## Typical Applications

For high frequency applications e.g.

- Sample and hold
- Timing
- Oscillating circuits
- High frequency coupling and decoupling

## Construction


### Dielectric:

Polypropylene (PP) film

### Capacitor electrodes:

Vacuum-deposited

### Internal construction:

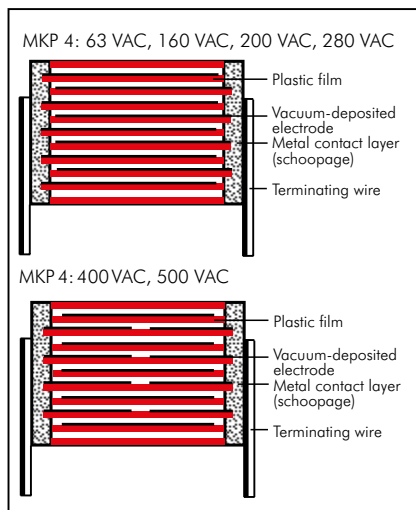

### Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

### Terminations:

Tinned wire.

### Marking:

Colour: Red. Marking: Black.

## Electrical Data

### Capacitance range:

0.01  $\mu\text{F}$  to 68  $\mu\text{F}$

### Rated voltages:

100VDC, 250VDC, 400VDC, 630VDC, 1000VDC, 1250VDC

### Capacitance tolerances:

$\pm 20\%$ ,  $\pm 10\%$ ,  $\pm 5\%$

### Operating temperature range:

$-55^\circ\text{C}$  to  $+105^\circ\text{C}$

### Climatic test category:

55/100/56 in accordance with IEC

### Insulation resistance at $+20^\circ\text{C}$ :

$C \leq 0.33 \mu\text{F}$ :  $\geq 1 \times 10^5 \text{ M}\Omega$

$C > 0.33 \mu\text{F}$ :  $\geq 30000 \text{ sec (M}\Omega \times \mu\text{F)}$

Measuring voltage: 100 V/1 min.

### Dissipation factors at $+20^\circ\text{C}$ : $\tan \delta$

at f	$C \leq 0.1 \mu\text{F}$	$0.1 \mu\text{F} < C \leq 1.0 \mu\text{F}$	$C > 1.0 \mu\text{F}$
1 kHz	$\leq 6 \times 10^{-4}$	$\leq 6 \times 10^{-4}$	$\leq 6 \times 10^{-4}$
10 kHz	$\leq 8 \times 10^{-4}$	$\leq 8 \times 10^{-4}$	–
100 kHz	$\leq 25 \times 10^{-4}$	–	–

### Test specifications:

In accordance with IEC 60384-16

**Test voltage:**  $1.6 U_r$ , 2 sec.

### Dielectric absorption:

0.05%

### Voltage derating:

A voltage derating factor of 1.35 % per K must be applied from  $+85^\circ\text{C}$  for DC voltages and from  $+75^\circ\text{C}$  for AC voltages.

### Reliability:

Operational life  $> 300000$  hours

Failure rate  $< 2 \text{ fit (} 0.5 \times U_r \text{ and } 40^\circ\text{C)}$ .

### Maximum pulse rise time:

Capacitance $\mu\text{F}$	max. pulse rise time V/ $\mu\text{sec}$ at $T_A < 40^\circ\text{C}$					
	100 VDC	250 VDC	400 VDC	630 VDC	1000 VDC	1250 VDC
0.01 ... 0.022	450	450	450	500	550	600
0.033 ... 0.068	250	250	300	350	400	450
0.1 ... 0.22	150	150	200	250	300	350
0.33 ... 0.68	100	100	150	200	200	250
1.0 ... 2.2	75	100	100	150	150	200
3.3 ... 4.7	60	100	100	120	140	160
6.8 ... 10	40	50	60	85	–	–
12 ... 68	20	20	40	50	–	–

## Mechanical Tests

### Pull test on pins:

$d \leq 0.8 \text{ }\varnothing$ : 10 N in direction of pins

$d > 0.8 \text{ }\varnothing$ : 20 N in direction of pins

according to IEC 60068-2-21

### Vibration:

6 hours at 10 ... 2000 Hz and 0.75 mm

displacement amplitude or 10 g in

accordance with IEC 60068-2-6

### Low air density:

1 kPa = 10 mbar in accordance with

IEC 60068-2-13

### Bump test:

4000 bumps at 390  $\text{m}/\text{sec}^2$

in accordance with IEC 60068-2-29

## Packing

Available taped and reeled up to and including case size 15 x 26 x 31.5 / PCM 27.5 mm.

Detailed taping information and graphs at the end of the catalogue.

For further details and graphs please refer to Technical Information.



## Continuation

### General Data

Capacitance	100 VDC/63 VAC*					250 VDC/160 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 µF	3	8.5	10	7.5	MKP4D021002B00	3	8.5	10	7.5	MKP4F021002B00
0.015 "	3	8.5	10	7.5	MKP4D021502B00	3	8.5	10	7.5	MKP4F021502B00
0.022 "	3	8.5	10	7.5	MKP4D022202B00	3	8.5	10	7.5	MKP4F022202B00
0.033 "	3	8.5	10	7.5	MKP4D023302B00	3	8.5	10	7.5	MKP4F023302B00
	4	9	13	10	MKP4D023303C00	4	9	13	10	MKP4F023303C00
0.047 "	4	9	10	7.5	MKP4D024702C00	4	9	10	7.5	MKP4F024702C00
	4	9	13	10	MKP4D024703C00	4	9	13	10	MKP4F024703C00
0.068 "	4	9	10	7.5	MKP4D026802C00	4	9	10	7.5	MKP4F026802C00
	4	9	13	10	MKP4D026803C00	4	9	13	10	MKP4F026803C00
0.1 µF	4.5	9.5	10.3	7.5	MKP4D031002D00	4.5	9.5	10.3	7.5	MKP4F031002D00
	4	9	13	10	MKP4D031003C00	4	9	13	10	MKP4F031003C00
0.15 "	5	10.5	10.3	7.5	MKP4D031502E00	5	10.5	10.3	7.5	MKP4F031502E00
	5	11	13	10	MKP4D031503F00	5	11	13	10	MKP4F031503F00
0.22 "	6	12	13	10	MKP4D032203G00	6	12	13	10	MKP4F032203G00
	5	11	18	15	MKP4D032204B00	5	11	18	15	MKP4F032204B00
0.33 "	6	12.5	18	15	MKP4D033304C00	6	12.5	18	15	MKP4F033304C00
0.47 "	7	14	18	15	MKP4D034704D00	7	14	18	15	MKP4F034704D00
0.68 "	8	15	18	15	MKP4D036804F00	8	15	18	15	MKP4F036804F00
	6	15	26.5	22.5	MKP4D036805B00	6	15	26.5	22.5	MKP4F036805B00
1.0 µF	7	16.5	26.5	22.5	MKP4D041005D00	7	16.5	26.5	22.5	MKP4F041005D00
						9	19	31.5	27.5	MKP4F041006A00
1.2 "	10.5	19	26.5	22.5	MKP4D041205G00	10.5	19	26.5	22.5	MKP4F041205G00
						9	19	31.5	27.5	MKP4F041206A00
1.5 "	10.5	19	26.5	22.5	MKP4D041505G00	10.5	19	26.5	22.5	MKP4F041505G00
						11	21	31.5	27.5	MKP4F041506B00
1.8 "	11	21	26.5	22.5	MKP4D041805I00	11	21	26.5	22.5	MKP4F041805I00
						11	21	31.5	27.5	MKP4F041806B00
2.2 "	11	21	26.5	22.5	MKP4D042205I00	11	21	26.5	22.5	MKP4F042205I00
	9	19	31.5	27.5	MKP4D042206A00	11	21	31.5	27.5	MKP4F042206B00
2.7 "	9	19	31.5	27.5	MKP4D042706A00	11	21	31.5	27.5	MKP4F042706B00
3.3 "	9	19	31.5	27.5	MKP4D043306A00	13	24	31.5	27.5	MKP4F043306D00
3.9 "	11	21	31.5	27.5	MKP4D043906B00	13	24	31.5	27.5	MKP4F043906D00
4.7 "	13	24	31.5	27.5	MKP4D044706D00	15	26	31.5	27.5	MKP4F044706F00
						13	24	41.5	37.5	MKP4F044707C00
5.6 "	13	24	31.5	27.5	MKP4D045606D00	17	29	31.5	27.5	MKP4F045606G00
						15	26	41.5	37.5	MKP4F045607D00
6.8 "	15	26	31.5	27.5	MKP4D046806F00	17	29	31.5	27.5	MKP4F046806G00
						15	26	41.5	37.5	MKP4F046807D00
8.2 "	15	26	31.5	27.5	MKP4D048206F00	17	34.5	31.5	27.5	MKP4F046806I00
						17	29	41.5	37.5	MKP4F046807E00
10 µF	17	29	31.5	27.5	MKP4D051006G00	20	39.5	31.5	27.5	MKP4F051006J00
	13	24	41.5	37.5	MKP4D051007C00	19	32	41.5	37.5	MKP4F051007F00
12 "	17	29	31.5	27.5	MKP4D051206G00	20	39.5	41.5	37.5	MKP4F051207G00
	15	26	41.5	37.5	MKP4D051207D00					
15 "	17	34.5	31.5	27.5	MKP4D051506I00	20	39.5	41.5	37.5	MKP4F051507G00
	17	29	41.5	37.5	MKP4D051507E00					
18 "	20	39.5	31.5	27.5	MKP4D051806J00	24	45.5	41.5	37.5	MKP4F051807H00
	19	32	41.5	37.5	MKP4D051807F00					
22 "	20	39.5	41.5	37.5	MKP4D052207G00	24	45.5	41.5	37.5	MKP4F052207H00
						28	38	41.5	37.5	MKP4F052207L00
27 "	20	39.5	41.5	37.5	MKP4D052707G00	31	46	41.5	37.5	MKP4F052707I00
33 "	28	38	41.5	37.5	MKP4D053307L00	35	50	41.5	37.5	MKP4F053307J00
	24	45.5	41.5	37.5	MKP4D053307H00					
39 "	31	46	41.5	37.5	MKP4D053907I00	40	55	41.5	37.5	MKP4F053907K00
47 "	35	50	41.5	37.5	MKP4D054707J00					
56 "	35	50	41.5	37.5	MKP4D055607J00					
68 "	40	55	41.5	37.5	MKP4D056807K00					

\* AC voltage:  $f \leq 400 \text{ Hz}$ ;  $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

Dims. in mm.

\*\* PCM = Printed circuit module = pin spacing

Rights reserved to amend design data without prior notification.



## Continuation

### General Data

Capacitance	400 VDC/220 VAC*					630 VDC/280 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 µF	3	8.5	10	7.5	MKP4G021002B00_____	3	8.5	10	7.5	MKP4J021002B00_____
						4	9	13	10	MKP4J021003C00_____
0.015 "	4	9	10	7.5	MKP4G021502C00_____	4	9	10	7.5	MKP4J021502C00_____
	4	9	13	10	MKP4G021503C00_____	4	9	13	10	MKP4J021503C00_____
0.022 "	4.5	9.5	10.3	7.5	MKP4G022202D00_____	4.5	9.5	10.3	7.5	MKP4J022202D00_____
	4	9	13	10	MKP4G022203C00_____	4	9	13	10	MKP4J022203C00_____
0.033 "	5	10.5	10.3	7.5	MKP4G023302E00_____	5	10.5	10.3	7.5	MKP4J023302E00_____
	4	9	13	10	MKP4G023303C00_____	4	9	13	10	MKP4J023303C00_____
0.047 "	5	10.5	10.3	7.5	MKP4G024702E00_____	5.7	12.5	10.3	7.5	MKP4J024702F00_____
	5	11	13	10	MKP4G024703F00_____	5	11	13	10	MKP4J024703F00_____
0.068 "	5.7	12.5	10.3	7.5	MKP4G026802F00_____	6	12	13	10	MKP4J026803G00_____
	5	11	13	10	MKP4G026803F00_____	6	12.5	18	15	MKP4J026804C00_____
0.1 µF	6	12	13	10	MKP4G031003G00_____	7	14	18	15	MKP4J031004D00_____
	5	11	18	15	MKP4G031004B00_____					
0.15 "	6	12.5	18	15	MKP4G031504C00_____	8	15	18	15	MKP4J031504F00_____
						6	15	26.5	22.5	MKP4J031505B00_____
0.22 "	7	14	18	15	MKP4G032204D00_____	9	16	18	15	MKP4J032204J00_____
						7	16.5	26.5	22.5	MKP4J032205D00_____
0.33 "	8	15	18	15	MKP4G033304F00_____	8.5	18.5	26.5	22.5	MKP4J033305F00_____
	6	15	26.5	22.5	MKP4G033305B00_____					
0.47 "	7	16.5	26.5	22.5	MKP4G034705D00_____	10.5	19	26.5	22.5	MKP4J034705G00_____
						11	21	31.5	27.5	MKP4J034706B00_____
0.68 "	8.5	18.5	26.5	22.5	MKP4G036805F00_____	11	21	31.5	27.5	MKP4J036806B00_____
1.0 µF	11	21	26.5	22.5	MKP4G041005I00_____	13	24	31.5	27.5	MKP4J041006D00_____
	11	21	31.5	27.5	MKP4G041006B00_____					
1.2 "	11	21	31.5	27.5	MKP4G041206B00_____	15	26	31.5	27.5	MKP4J041206F00_____
1.5 "	11	21	31.5	27.5	MKP4G041506B00_____	15	26	31.5	27.5	MKP4J041506F00_____
						13	24	41.5	37.5	MKP4J041507C00_____
1.8 "	13	24	31.5	27.5	MKP4G041806D00_____	17	29	31.5	27.5	MKP4J041806G00_____
						15	26	41.5	37.5	MKP4J041807D00_____
2.2 "	15	26	31.5	27.5	MKP4G042206F00_____	17	34.5	31.5	27.5	MKP4J042206I00_____
	13	24	41.5	37.5	MKP4G042207C00_____	17	29	41.5	37.5	MKP4J042207E00_____
2.7 "	17	29	31.5	27.5	MKP4G042706G00_____	17	29	41.5	37.5	MKP4J042707E00_____
3.3 "	17	29	31.5	27.5	MKP4G043306G00_____	20	39.5	31.5	27.5	MKP4J043306J00_____
	15	26	41.5	37.5	MKP4G043307D00_____	19	32	41.5	37.5	MKP4J043307F00_____
3.9 "	20	39.5	31.5	27.5	MKP4G043906J00_____	20	39.5	41.5	37.5	MKP4J043907G00_____
4.7 "	20	39.5	31.5	27.5	MKP4G044706J00_____	20	39.5	41.5	37.5	MKP4J044707G00_____
	19	32	41.5	37.5	MKP4G044707F00_____					
5.6 "	20	39.5	41.5	37.5	MKP4G045607G00_____	24	45.5	41.5	37.5	MKP4J045607H00_____
						28	38	41.5	37.5	MKP4J045607L00_____
6.8 "	20	39.5	41.5	37.5	MKP4G046807G00_____	24	45.5	41.5	37.5	MKP4J046807H00_____
						28	38	41.5	37.5	MKP4J046807L00_____
8.2 "	24	45.5	41.5	37.5	MKP4G048207H00_____	31	46	41.5	37.5	MKP4J048207I00_____
10 µF	24	45.5	41.5	37.5	MKP4G051007H00_____	35	50	41.5	37.5	MKP4J051007J00_____
	28	38	41.5	37.5	MKP4G051007L00_____					
12 "	31	46	41.5	37.5	MKP4G051207I00_____	40	55	41.5	37.5	MKP4J051207K00_____
15 "	31	46	41.5	37.5	MKP4G051507I00_____					
18 "	35	50	41.5	37.5	MKP4G051807J00_____					
22 "	40	55	41.5	37.5	MKP4G052207K00_____					

\* AC voltages:  $f \leq 400 \text{ Hz}$ ;  $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

\*\* PCM = Printed circuit module = pin spacing

Dims. in mm.

Rights reserved to amend design data without prior notification.

Continuation page 49

## Continuation

### General Data

Capacitance	1000 VDC/400 VAC*					1250 VDC/500 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 $\mu$ F	5.7	12.5	10.3	7.5	MKP4O121002F00	5	11	18	15	MKP4R021004B00
	5	11	13	10	MKP4O121003F00					
0.015 "	5	11	13	10	MKP4O121503F00	6	12.5	18	15	MKP4R021504C00
	5	11	18	15	MKP4O121504B00					
0.022 "	5	11	18	15	MKP4O122204B00	7	14	18	15	MKP4R022204D00
0.033 "	6	12.5	18	15	MKP4O123304C00	8	15	18	15	MKP4R023304F00
0.047 "	7	14	18	15	MKP4O124704D00	6	15	26.5	22.5	MKP4R024705B00
0.068 "	8	15	18	15	MKP4O126804F00	8.5	18.5	26.5	22.5	MKP4R026805F00
	6	15	26.5	22.5	MKP4O126805B00					
0.1 $\mu$ F	9	16	18	15	MKP4O131004J00	10.5	19	26.5	22.5	MKP4R031005G00
	7	16.5	26.5	22.5	MKP4O131005D00					
0.15 "	8.5	18.5	26.5	22.5	MKP4O131505F00	11	21	31.5	27.5	MKP4R031506B00
0.22 "	11	21	26.5	22.5	MKP4O132205I00	13	24	31.5	27.5	MKP4R032206D00
	11	21	31.5	27.5	MKP4O132206B00					
0.33 "	11	21	31.5	27.5	MKP4O133306B00	15	26	31.5	27.5	MKP4R033306F00
	13	24	31.5	27.5	MKP4O134706D00					
0.47 "	13	24	31.5	27.5	MKP4O134706D00	17	29	31.5	27.5	MKP4R034706G00
	15	26	31.5	27.5	MKP4O136806G00					
0.68 "	17	29	31.5	27.5	MKP4O136806G00	20	39.5	31.5	27.5	MKP4R036806J00
	15	26	41.5	37.5	MKP4O136807D00					
1.0 $\mu$ F	20	39.5	31.5	27.5	MKP4O141006J00	20	39.5	41.5	37.5	MKP4R041007G00
	17	29	41.5	37.5	MKP4O141007E00					
1.2 "	19	32	41.5	37.5	MKP4O141207F00	20	39.5	41.5	37.5	MKP4R041207G00
1.5 "	20	39.5	41.5	37.5	MKP4O141507G00	24	45.5	41.5	37.5	MKP4R041507H00
1.8 "	20	39.5	41.5	37.5	MKP4O141807G00	24	45.5	41.5	37.5	MKP4R041807H00
2.2 "	24	45.5	41.5	37.5	MKP4O142207H00	31	46	41.5	37.5	MKP4R042207I00
	28	38	41.5	37.5	MKP4O142207L00					
2.7 "	31	46	41.5	37.5	MKP4O142707I00	35	50	41.5	37.5	MKP4R042707J00
3.3 "	31	46	41.5	37.5	MKP4O143307I00	40	55	41.5	37.5	MKP4R043307K00
3.9 "	35	50	41.5	37.5	MKP4O143907J00					
4.7 "	35	50	41.5	37.5	MKP4O144707J00					


\* AC voltages:  $f \leq 400$  Hz;  $1.4 \times U_{rms} + UDC \leq U_r$

\*\* PCM = Printed circuit module = pin spacing


Dims. in mm.

Part number completion:	
Version code:	2-pin = 00
	4-pin = D4
Tolerance:	20 % = M
	10 % = K
	5 % = J
Packing:	bulk = S
Pin length:	6-2 = SD
Taped version see page 133.	

#### 2-pin version

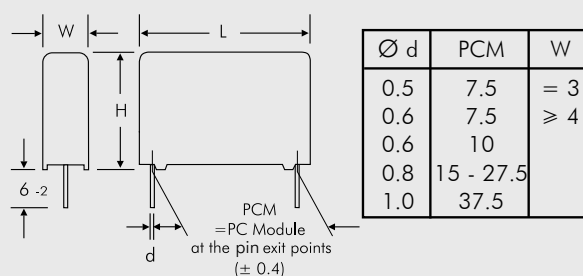


#### 4-pin version

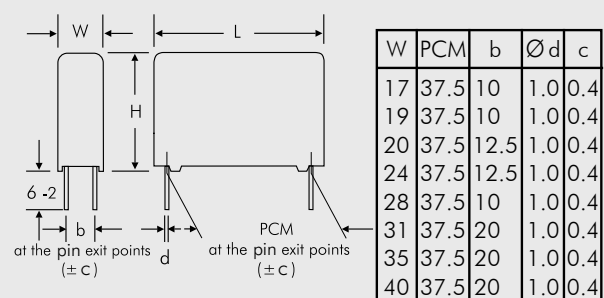


Rights reserved to amend design data without prior notification.

## Continuation

Impedance change with frequency  
(general guide).

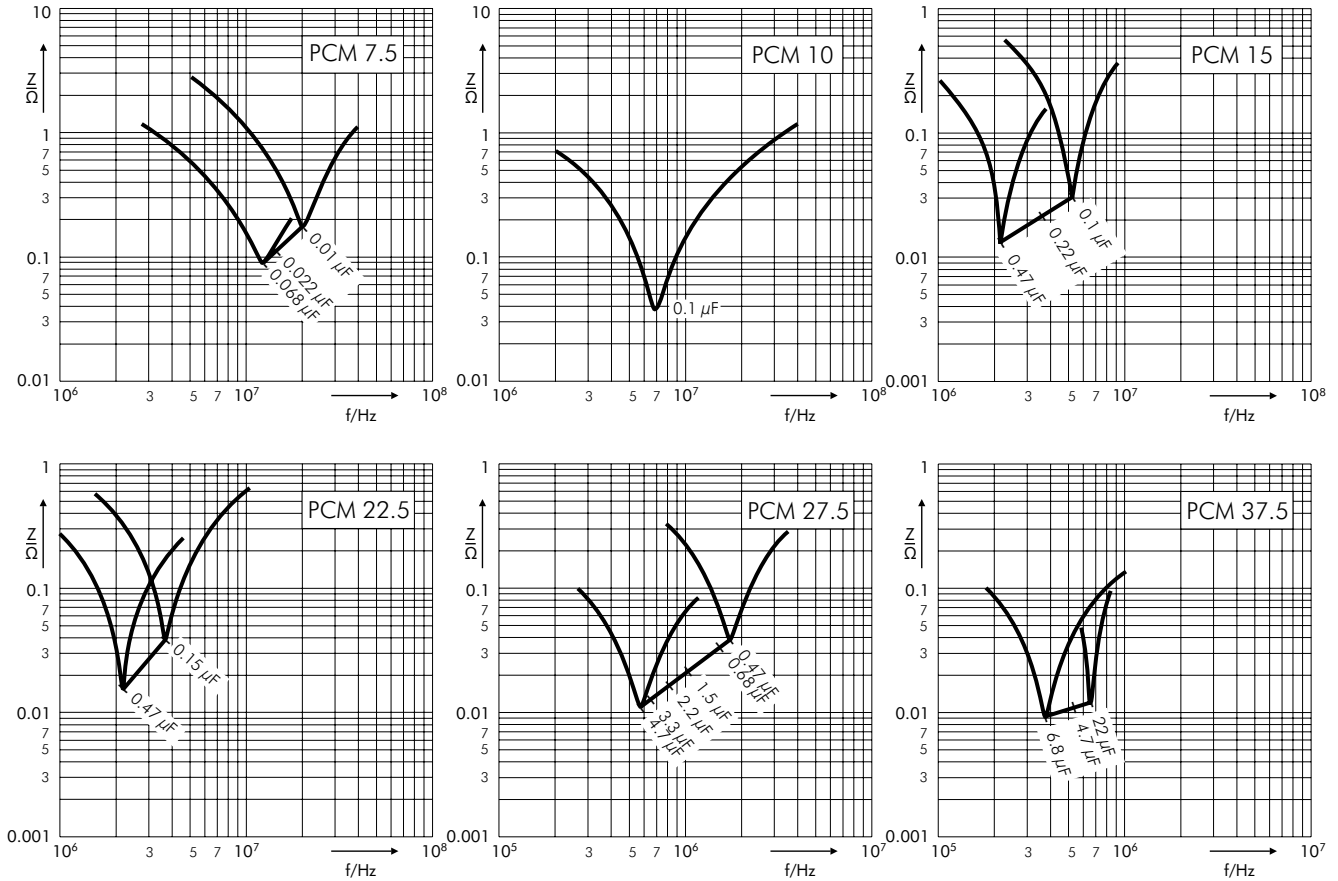

Permissible AC voltage  
in relation to frequency  
at 10° C internal temperature rise  
(general guide).

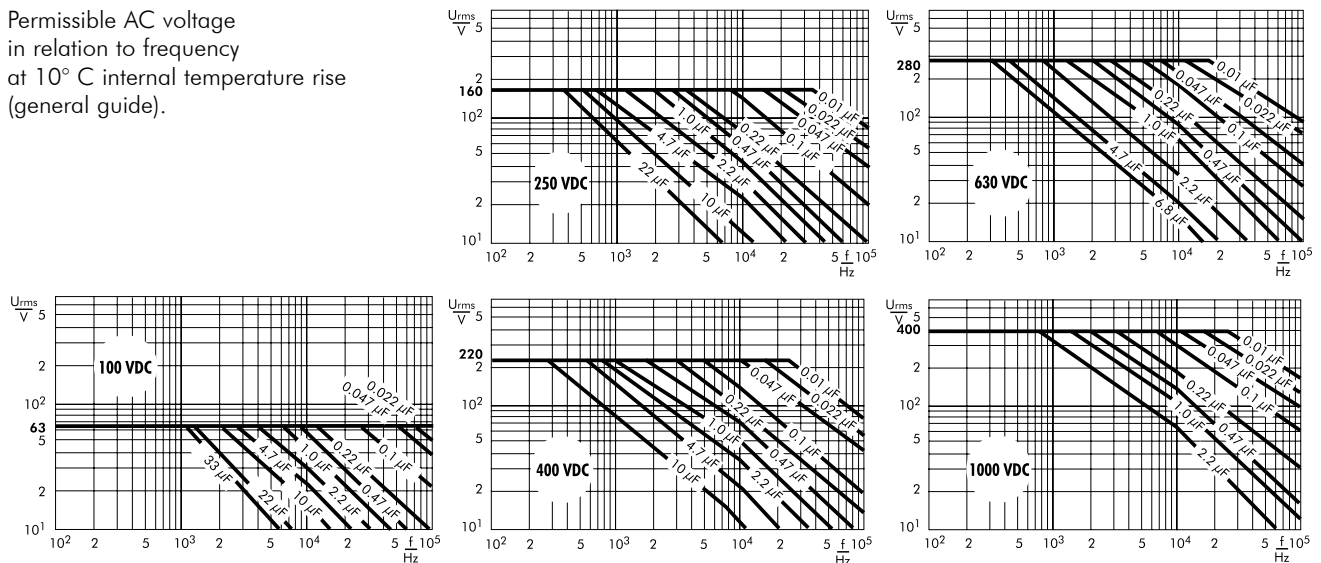

## Recommendation for Processing and Application of Through-Hole Capacitors

### Soldering Process

Internal temperature of the capacitor must be kept as follows:

Polyester: preheating:  $T_{max.} \leq 125^{\circ} C$   
 soldering:  $T_{max.} \leq 135^{\circ} C$

Polypropylene: preheating:  $T_{max.} \leq 100^{\circ} C$   
 soldering:  $T_{max.} \leq 110^{\circ} C$

#### Single wave soldering

Soldering bath temperature:  $T < 260^{\circ} C$


Dwell time:  $t < 5 \text{ sec}$

#### Double wave soldering

Soldering bath temperature:  $T < 260^{\circ} C$

Dwell time:  $\sum t < 5 \text{ sec}$

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

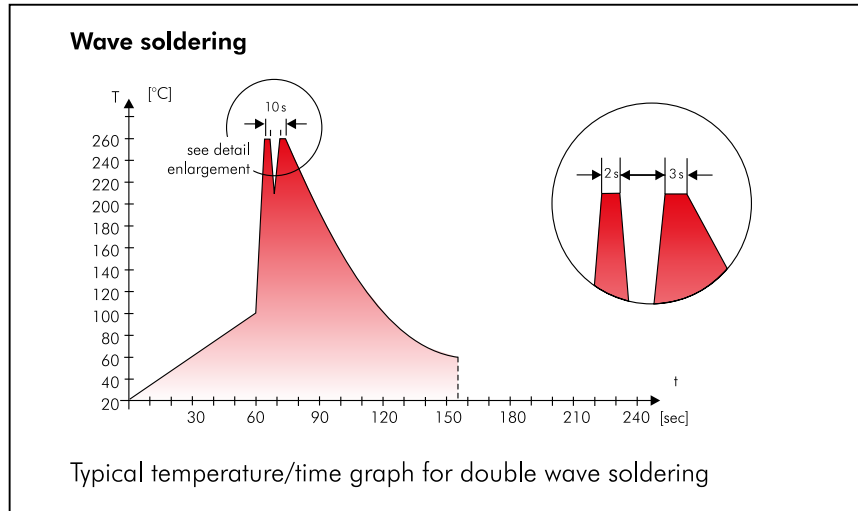

## WIMA Quality and Environmental Philosophy

### ISO 9001:2015 Certification

ISO 9001:2015 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2015 of our factories certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

### WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- pin attachment
- cast resin preparation/encapsulation
- 100% final inspection
- Testing as per customer requirements

### WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- Lead
- PCB
- CFC
- Hydrocarbon chloride
- Chromium 6+
- PBB/PBDE
- Arsenic
- Cadmium
- Mercury
- etc.

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- adhesive tapes made of plastic
- metal clips

### RoHS Compliance

According to the RoHS Directive 2015/863/EU as amended from time to time certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has re-frained from using such substances since years already.



WIMA Kondensatoren sind bleifrei konform RoHS 2015/863/EU  
 WIMA capacitors are lead free in accordance with RoHS 2015/863/EU

Tape for lead-free WIMA capacitors

### DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.

# Typical Dimensions for Taping Configuration

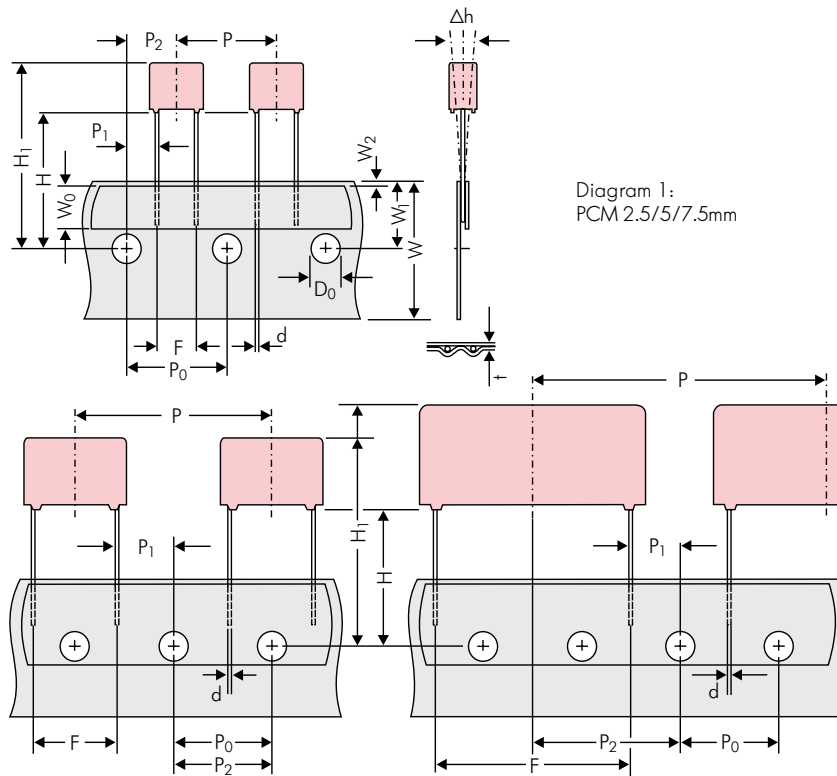


Diagram 1:  
PCM 2.5/5/7.5mm

Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5\*mm

\*PCM 27.5 tapping possible with two feed holes between components

Designation	Symbol	Dimensions for Radial Taping						
		PCM 2.5 tapping	PCM 5 tapping	PCM 7.5 tapping	PCM 10 tapping*	PCM 15 tapping*	PCM 22.5 tapping	PCM 27.5 tapping
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5
Hold-down tape width	W <sub>0</sub>	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape
Hole position	W <sub>1</sub>	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5
Hold-down tape position	W <sub>2</sub>	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.
Feed hole diameter	D <sub>0</sub>	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	*38.1 ±1.5 or 50.8 ±1.5
Feed hole pitch	P <sub>0</sub>	12.7 ±0.3 error max. 1.0 mm/20 pitch	12.7 ±0.3 error max. 1.0 mm/20 pitch	12.7 ±0.3 error max. 1.0 mm/20 pitch	12.7 ±0.3 error max. 1.0 mm/20 pitch	12.7 ±0.3 error max. 1.0 mm/20 pitch	12.7 ±0.3 error max. 1.0 mm/20 pitch	12.7 ±0.3 error max. 1.0 mm/20 pitch
Feed hole centre to pin	P <sub>1</sub>	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7
Hole centre to component centre	P <sub>2</sub>	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3
Feed hole centre to bottom edge of the component	H <sub>▲</sub>	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5
Feed hole centre to top edge of the component	H <sub>1</sub>	H+H <sub>component</sub> < H <sub>1</sub> 32.25 max.	H+H <sub>component</sub> < H <sub>1</sub> 32.25 max.	H+H <sub>component</sub> < H <sub>1</sub> 24.5 to 31.5	H+H <sub>component</sub> < H <sub>1</sub> 25.0 to 31.5	H+H <sub>component</sub> < H <sub>1</sub> 26.0 to 37.0	H+H <sub>component</sub> < H <sub>1</sub> 30.0 to 43.0	H+H <sub>component</sub> < H <sub>1</sub> 35.0 to 45.0
Pin spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 <sup>+0.8</sup> <sub>-0.2</sub>	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8
Pin diameter	d	0.4 ±0.05	0.5 ±0.05	*0.5 ±0.05 or 0.6 <sup>+0.06</sup> <sub>-0.05</sub>	*0.5 ±0.05 or 0.6 <sup>+0.06</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.
Total tape thickness	t	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2
Package (see also page 134)	▲	ROLL/AMMO			AMMO			
		REEL Ø 360 max. Ø 30 ±1	B 52 ±2 58 ±2	depending on comp. dimensions	REEL Ø 360 max. Ø 30 ±1	B 52 ±2 58 ±2 66 ±2	or REEL Ø 500 max. Ø 25 ±1	B 54 ±2 60 ±2 68 ±2
Unit		see details page 135.						

▲ When ordering please specify dimension H and required packaging type.

Dims in mm.

• Diameter of pins see General Data.


Please clarify customer-specific deviations with the manufacturer.

\* PCM 10 and PCM 15 can be crimped to PCM 7.5.


Position of components according to PCM 7.5 (sketch 1). P<sub>0</sub> = 12.7 or 15.0 is possible

## Types of Tape Packaging of Capacitors for Automatic Radial Insertion


### ■ ROLL Packaging

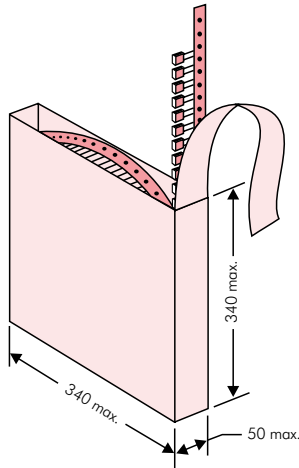

### ■ AMMO Packaging

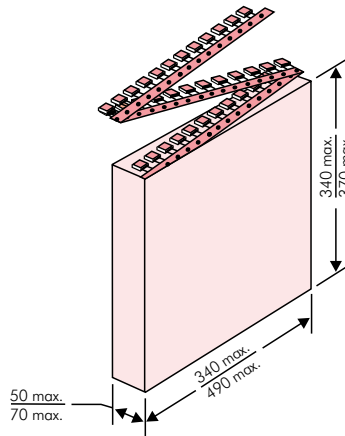

### ■ REEL Packaging

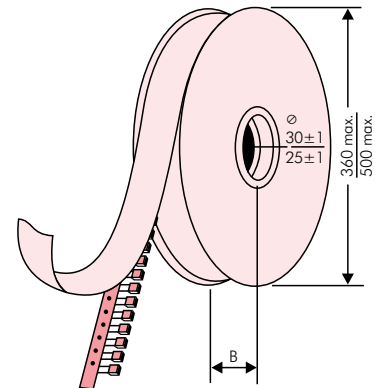

## BAR CODE (Labelling)

Labelling of package units in plain text and with alphanumeric Bar Code

- WIMA supplier number
- Date code
- Customer's P/O number
- P/O line
- Customer's part number
- WIMA part number
- Quantity
- WIMA confirmation number
- Country of origin
- Customer name
- Handling unit number
- Week of delivery.

In addition part description of

- article
- capacitance value
- rated voltage
- dimensions
- technical note
- capacitance tolerance
- packing
- connecting information

**WIMA** Best Capacitors Made in Germany  
Werk Aurich

Supplier-ID: LIEF.NR. Date Code: 20210419

Purchase Order No. (P/O): Bestellung xyz P/O line: 100

Customer Part No.: KUNDENTEILENUMMER

WIMA Part No.: MKP1F041006B00KSSD Quantity: 459

WIMA Confirmation No.: 0001105072000100

Customer No.: 0000100002 RoHS  
2011/65/EU

Gross Weight [g]: 4557 COO: DE

WIMA – MKP 10 WIMA Part No.: MKP1F041006B00KSSD

MKP 10 1.0 µF 250 VDC 11x21x31.5 RM27.5

Standard 10% Lose – Standard Drähte 6–2

Vorlage Debitor Inland

0001105072000100

1002021443 QTY: 459 Week 19/2021

BARCODE PDF417  
BARCODE 2D Datamatrix

## Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm



PCM	Size				bulk	pcs. per packing unit									
						ROLL		REEL				AMMO			
	W	H	L	Codes		S	N	O	Ø 360		Ø 500		340 x 340		490 x 370
								F	I	H	J	A	C	B	D
<b>2.5 mm</b>	2.5	7	4.6	<b>0B</b>	5000	2200		2500				2800			
	3	7.5	4.6	<b>0C</b>	5000	2000		2300				2300			
	3.8	8.5	4.6	<b>0D</b>	5000	1500		1800				1800			
	4.6	9	4.6	<b>0E</b>	5000	1200		1500				1500			
	5.5	10	4.6	<b>0F</b>	5000	900		1200				1200			
<b>5 mm</b>	2.5	6.5	7.2	<b>1A</b>	5000	2200		2500				2800			
	3	7.5	7.2	<b>1B</b>	5000	2000		2300				2300			
	3.5	8.5	7.2	<b>1C</b>	5000	1600		2000				2000			
	4.5	6	7.2	<b>1D</b>	6000	1300		1500				1500			
	4.5	9.5	7.2	<b>1E</b>	4000	1300		1500				1500			
	5	10	7.2	<b>1F</b>	3500	1100		1400				1400			
	5.5	7	7.2	<b>1G</b>	4000	1000		1200				1200			
	5.5	11.5	7.2	<b>1H</b>	2500	1000		1200				1200			
	6.5	8	7.2	<b>1I</b>	2500	800		1000				1000			
	7.2	8.5	7.2	<b>1J</b>	2500	700		1000				1000			
	7.2	13	7.2	<b>1K</b>	2000	700		950				1000			
	8.5	10	7.2	<b>1L</b>	2000	600		800				800			
	8.5	14	7.2	<b>1M</b>	1500	600		800				800			
11	16	7.2	<b>1N</b>	1000	500		600				640				
11	18	7.2	<b>1O</b>	1000	500		600				640				
<b>7.5 mm</b>	2.5	7	10	<b>2A</b>	5000			2500		4400		2500			
	3	8.5	10	<b>2B</b>	5000			2200		4300		2300		4150	
	4	9	10	<b>2C</b>	4000			1700		3200		1700		3000	
	4.5	9.5	10.3	<b>2D</b>	3500			1500		2900		1400		2700	
	5	10.5	10.3	<b>2E</b>	3000			1300		2500		1300			
	5.7	12.5	10.3	<b>2F</b>	2000			1000		2200		1100			
	7.2	12.5	10.3	<b>2G</b>	1500			900		1800		1000			
<b>10 mm</b>	4	9	13	<b>3C</b>	3000			900		1600				1450	
	4	9.5	13	<b>3D</b>	3000			900		1600				1400	
	5	11	13	<b>3F</b>	3000			700		1300				1100	
	6	12	13	<b>3G</b>	2400			550		1100				1000	
	6	12.5	13	<b>3H</b>	2400			550		1100				1000	
	8	12	13	<b>3I</b>	2000			400		800				740	
<b>15 mm</b>	5	11	18	<b>4B</b>	2400			600		1200				1150	
	6	12.5	18	<b>4C</b>	2000			500		1000				1000	
	7	14	18	<b>4D</b>	1600			450		900				850	
	8	15	18	<b>4F</b>	1200			400		800				740	
	9	14	18	<b>4H</b>	1200			350		700				650	
	9	16	18	<b>4J</b>	900			350		700				650	
	11	14	18	<b>4M</b>	1000			300		600				540	
<b>22.5 mm</b>	5	14	26.5	<b>5A</b>	1200					800				770	
	6	15	26.5	<b>5B</b>	1000					700				640	
	7	16.5	26.5	<b>5D</b>	760					600				550	
	8.5	18.5	26.5	<b>5F</b>	500					480				450	
	10.5	19	26.5	<b>5G</b>	594*					400				360	
	10.5	20.5	26.5	<b>5H</b>	594*					400				360	
	11	21	26.5	<b>5I</b>	561*					380				350	

\* for 2-inch transport pitches.

\* TPS (Tray-Packing-System). Plate versions may have different packing units. Samples and pre-production needs on request.

Rights reserved to amend design data without prior notification.



## Packing Quantities for Capacitors with Radial Pins in PCM 27.5 mm to 52.5 mm

PCM	Size				bulk	pcs. per packing unit										
						ROLL		REEL				AMMO				
	W	H	L	Codes		S	N	O	Ø 360		Ø 500		340 x 340		490 x 370	
							H16.5	H18.5	H16.5	H18.5	H16.5	H18.5	H16.5	H18.5	H16.5	H18.5
							F	I	H	J	A	C	B	D		
<b>27.5 mm</b>	9	19	31.5	<b>6A</b>	567*	-	-	-	-	460/340*	-	-	-	-	-	-
	11	21	31.5	<b>6B</b>	459*	-	-	-	-	380/280*	-	-	-	-	-	-
	13	24	31.5	<b>6D</b>	378*	-	-	-	-	300	-	-	-	-	-	-
	15	26	31.5	<b>6F</b>	324*	-	-	-	-	270	-	-	-	-	-	-
	17	29	31.5	<b>6G</b>	198*	-	-	-	-	-	-	-	-	-	-	-
	17	34.5	31.5	<b>6I</b>	198*	-	-	-	-	-	-	-	-	-	-	-
	20	39.5	31.5	<b>6J</b>	162*	-	-	-	-	-	-	-	-	-	-	-
<b>37.5 mm**</b>	9	19	41.5	<b>7A</b>	441*	-	-	-	-	-	-	-	-	-	-	
	11	22	41.5	<b>7B</b>	357*	-	-	-	-	-	-	-	-	-	-	
	13	24	41.5	<b>7C</b>	294*	-	-	-	-	-	-	-	-	-	-	
	15	26	41.5	<b>7D</b>	252*	-	-	-	-	-	-	-	-	-	-	
	17	29	41.5	<b>7E</b>	154*	-	-	-	-	-	-	-	-	-	-	
	19	32	41.5	<b>7F</b>	140*	-	-	-	-	-	-	-	-	-	-	
	20	39.5	41.5	<b>7G</b>	126*	-	-	-	-	-	-	-	-	-	-	
	24	45.5	41.5	<b>7H</b>	112*	-	-	-	-	-	-	-	-	-	-	
	28	38	41.5	<b>7L</b>	84*	-	-	-	-	-	-	-	-	-	-	
	31	46	41.5	<b>7I</b>	84*	-	-	-	-	-	-	-	-	-	-	
	35	50	41.5	<b>7J</b>	35*	-	-	-	-	-	-	-	-	-	-	
40	55	41.5	<b>7K</b>	28*	-	-	-	-	-	-	-	-	-	-		
<b>48.5 mm**</b>	19	31	56	<b>8D</b>	120*	-	-	-	-	-	-	-	-	-		
	23	34	56	<b>8E</b>	80*	-	-	-	-	-	-	-	-	-		
	27	37.5	56	<b>8H</b>	84*	-	-	-	-	-	-	-	-	-		
	33	48	56	<b>8J</b>	25*	-	-	-	-	-	-	-	-	-		
	37	54	56	<b>8L</b>	25*	-	-	-	-	-	-	-	-	-		
<b>52.5 mm</b>	25	45	57	<b>9D</b>	70*	-	-	-	-	-	-	-	-			
	30	45	57	<b>9E</b>	60*	-	-	-	-	-	-	-	-			
	35	50	57	<b>9F</b>	25*	-	-	-	-	-	-	-	-			
	45	55	57	<b>9H</b>	20*	-	-	-	-	-	-	-	-			
	45	65	57	<b>9J</b>	20*	-	-	-	-	-	-	-	-			

\* TPS (Tray-Packing-System). Plate versions may have different packing units.

Rights reserved to amend design data without prior notification.

\*\*For Snubber capacitors in 2-pin version the PCM is changing to 38.5 respective 49.5 mm. Samples and pre-production needs on request.

Updated data on [www.wima.com](http://www.wima.com)



A WIMA part number consists of 18 digits and is composed as follows:

- Field 1 - 4: Type description
- Field 5 - 6: Rated voltage
- Field 7 - 10: Capacitance
- Field 11 - 12: Size and PCM
- Field 13 - 14: Version code (e.g. Snubber versions)
- Field 15: Capacitance tolerance
- Field 16: Packing
- Field 17 - 18: Pin length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
<b>M</b>	<b>K</b>	<b>S</b>	<b>2</b>	<b>C</b>	<b>0</b>	<b>2</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>A</b>	<b>0</b>	<b>0</b>	<b>M</b>	<b>S</b>	<b>S</b>	<b>D</b>
MKS 2				63 VDC		0.01 µF			2.5x6.5x7.2			-		20%	bulk	6 -2	

<p><b>Type description:</b></p> <p>SMD-PET = SMDT  SMD-PPS = SMDI  MKS 02 = MKS0  FKS 2 = FKS2  FKP 2 = FKP2  MKS 2 = MKS2  MKP 2 = MKP2  MKS 4 = MKS4  MKP 4 = MKP4  MKP 10 = MKP1  FKP 1 = FKP1  MKP-X2 = MKX2  MKP-X1 R = MKX1  MKP-Y2 = MKY2  Snubber MKP = SNMP  Snubber FKP = SNFP  GTO MKP = GTOM  DC-LINK MKP 4 = DCP4  DC-LINK MKP 6 = DCP6  DC-LINK HC = DCHC</p>	<p><b>Rated voltage:</b></p> <p>63 VDC = C0  100 VDC = D0  250 VDC = F0  400 VDC = G0  450 VDC = H0  520 VDC = H2  600 VDC = I0  630 VDC = J0  700 VDC = K0  800 VDC = L0  850 VDC = M0  900 VDC = N0  1000 VDC = O1  1100 VDC = P0  1200 VDC = Q0  1250 VDC = R0  1500 VDC = S0  1600 VDC = T0  1700 VDC = TA  2000 VDC = U0  2500 VDC = V0  3000 VDC = W0  4000 VDC = X0  6000 VDC = Y0  230 VAC = 3Y  275 VAC = 1W  300 VAC = 2W  305 VAC = AW  350 VAC = BW  440 VAC = 4W  ...</p>	<p><b>Capacitance:</b></p> <p>22 pF = 0022  47 pF = 0047  100 pF = 0100  150 pF = 0150  220 pF = 0220  330 pF = 0330  470 pF = 0470  680 pF = 0680  1000 pF = 1100  1500 pF = 1150  2200 pF = 1220  3300 pF = 1330  4700 pF = 1470  6800 pF = 1680  0.01 µF = 2100  0.022 µF = 2220  0.047 µF = 2470  0.1 µF = 3100  0.22 µF = 3220  0.47 µF = 3470  1 µF = 4100  2.2 µF = 4220  4.7 µF = 4470  10 µF = 5100  22 µF = 5220  47 µF = 5470  100 µF = 6100  220 µF = 6220  1000 µF = 7100  1500 µF = 7150  ...</p>	<p><b>Size:</b></p> <p>4.8x3.3x3 Size 1812 = KA  4.8x3.3x4 Size 1812 = KB  5.7x5.1x3.5 Size 2220 = QA  5.7x5.1x4.5 Size 2220 = QB  7.2x6.1x3 Size 2824 = TA  7.2x6.1x5 Size 2824 = TB  10.2x7.6x5 Size 4030 = VA  12.7x10.2x6 Size 5040 = XA  15.3x13.7x7 Size 6054 = YA  2.5x7x4.6 PCM2.5 = 0B  3x7.5x4.6 PCM2.5 = 0C  2.5x6.5x7.2 PCM5 = 1A  3x7.5x7.2 PCM5 = 1B  2.5x7x10 PCM7.5 = 2A  3x8.5x10 PCM7.5 = 2B  3x9x13 PCM10 = 3A  4x9x13 PCM10 = 3C  5x11x18 PCM15 = 4B  6x12.5x18 PCM15 = 4C  5x14x26.5 PCM22.5 = 5A  6x15x26.5 PCM22.5 = 5B  9x19x31.5 PCM27.5 = 6A  11x21x31.5 PCM27.5 = 6B  9x19x41.5 PCM37.5 = 7A  11x22x41.5 PCM37.5 = 7B  19x31x56 PCM 48.5 = 8D  25x45x57 PCM 52.5 = 9D  ...</p>	<p><b>Tolerance:</b></p> <p>±20% = M  ±10% = K  ±5% = J  ±2.5% = H  ±1% = E  ...</p> <p><b>Packing:</b></p> <p>AMMO H16.5 340x340 = A  AMMO H16.5 490x370 = B  AMMO H18.5 340x340 = C  AMMO H18.5 490x370 = D  REEL H16.5 360 = F  REEL H16.5 500 = H  REEL H18.5 360 = I  REEL H18.5 500 = J  ROLL H16.5 = N  ROLL H18.5 = O  BLISTER W12 180 = P  BLISTER W12 330 = Q  BLISTER W16 330 = R  BLISTER W24 330 = T  Bulk/TPS Standard = S  ...</p>
			<p><b>Version code:</b></p> <p>Standard = 00  Version A1 = 1A  Version A1.1.1 = 1B  Version A2 = 2A  ...</p>	<p><b>Pin length (untaped)</b></p> <p>3.5 ±0.5 = C9  6 -2 = SD  16 ±1 = P1  ...</p> <p><b>Pin length (taped)</b></p> <p>none = 00</p>

The data on this page is not complete and serves only to explain the part number system. Part number information is listed on the pages of the respective WIMA range.