


Power: **1.0VA - 2.3VA**

Features

- Inherently Short-circuit Proof
- Vacuum Filling
- Split Bobbin Design & Winding
- Temperature Class: ta50°C/B, ta70°C/B
- Frequency 50/60Hz
- Dielectric Strength 4200Vrms
- 100% Tested Production
- According to EN61558-1/EN61558-2-6, UL5085-1/-3




Outline Dimensions

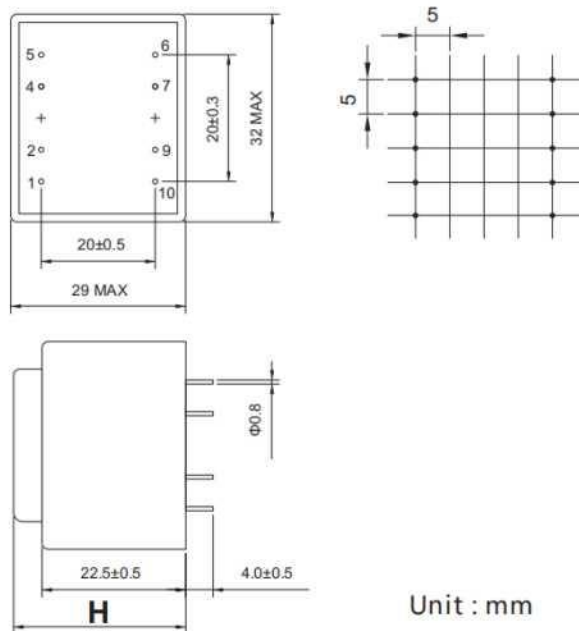


Unit : mm


Electrical Schematic




Single Input / Single Output



Single Input / Double Output



Double Input / Single Output



Double Input / Double Output

Product Height Specification

Model	Temperature Class		High(mm) Max	weight (g)	Packaging Unit (pcs)
	ta70°C/B	ta50°C/B			
A2812-X-XXXX-XXX-X	1.0VA	1.5VA	27.5	75	180
A2815-X-XXXX-XXX-X	1.5VA	1.8VA	29.5	85	180
A2818-X-XXXX-XXX-X	2.0VA	2.3VA	32.5	105	150