

Power: **0.5VA - 3.0VA**




**Features**


- Inherently Short-circuit Proof
  - Vacuum Filling
  - Split Bobbin Design & Winding
  - Temperature Class: ta50°C/B, ta70°C/B, ta70°C/F
  - Frequency 50/60Hz
  - Dielectric Strength 4200Vrms
  - 100% Tested Production
- VDE: No.40047919/40051864/40043273, UL: No.E352173
  - EN61558-1/EN61558-2-6, UL5085-1/-3
  - VDE file No.40047919/40051864/40043273, UL file No.E352173
  - Conforms to EN61558-1/EN61558-2-6, UL5085-1/-3



Outline Dimensions

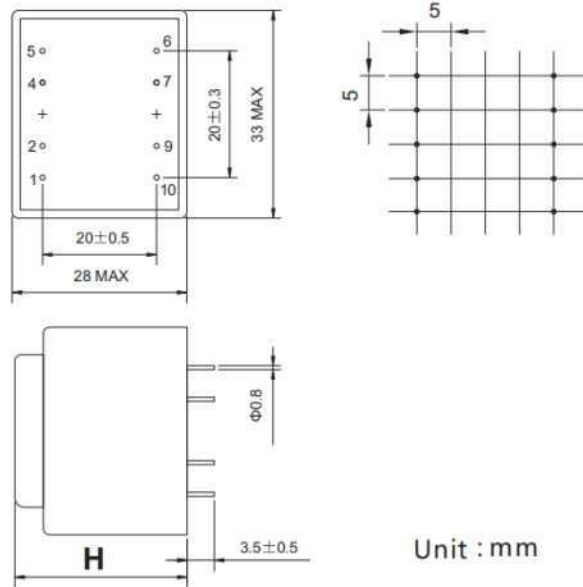

Electrical Schematic

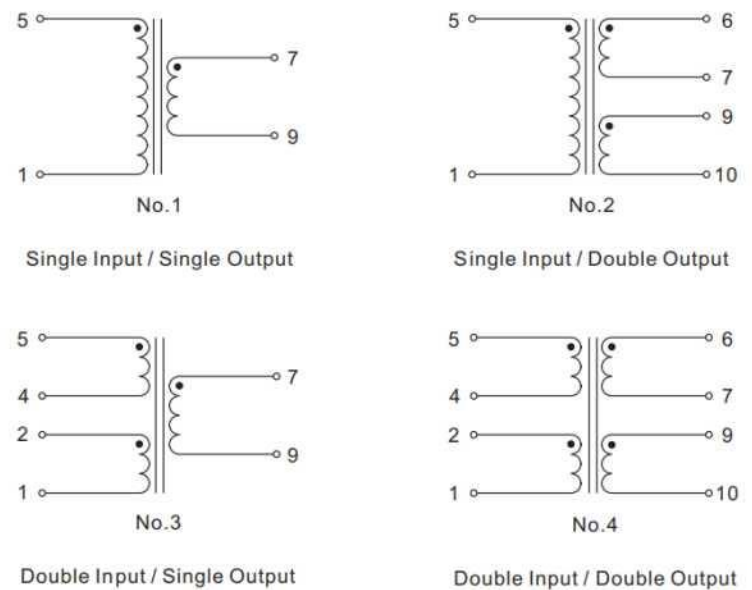

**Product Height Specification**

Model	Temperature Class			High(mm) Max	weight (g)	Packaging Unit (pcs)
	ta70°C/B	ta70°C/F	ta50°C/B			
A3005-X-XXXX-XXX-X	0.5VA,0.6VA	0.6VA	-	16	43	240
A3008-X-XXXX-XXX-X	0.8VA	-	1.0VA	20	60	240
A3010-X-XXXX-XXX-X	1.0VA,1.5VA	1.5VA,1.8VA	-	22.3	70	200
A3012-X-XXXX-XXX-X	1.5VA,1.8VA	1.8VA,1.9VA	1.8VA	24.5	85	200
A3015-X-XXXX-XXX-X	2.0VA	2.1VA,2.3VA	2.3VA	27.5	100	150
A3018-X-XXXX-XXX-X	2.3VA	2.3VA,2.8VA	2.8VA	29.7	110	150
A3023-X-XXXX-XXX-X	2.8VA	3.0VA	3.0VA	34.7	140	120