

Power: **3.5VA**






Features


- Non Short-circuit Proof
- Vacuum Filling
- Split Bobbin Design & Winding
- Temperature Class: ta70°C/B
- Frequency 50/60Hz
- Dielectric Strength 4200Vrms
- 100% Tested Production
- According to EN61558-1/EN61558-2-6,UL5085-1/-3
- 155g/pc,105pcs per carton




Outline Dimensions

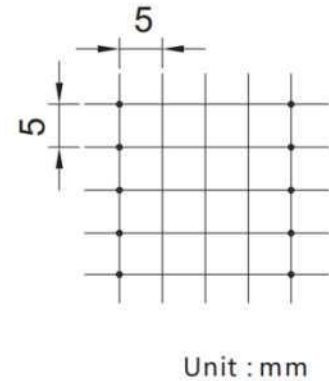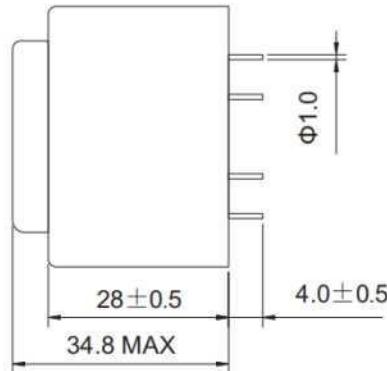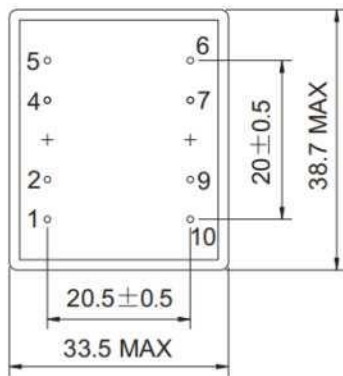


Electrical Schematic

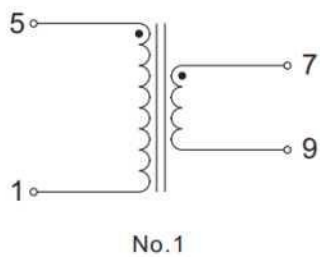


Single Input / Single Output

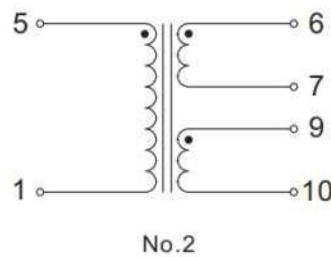

Single Input / Double Output

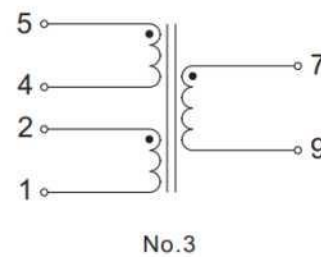

Double Input / Single Output

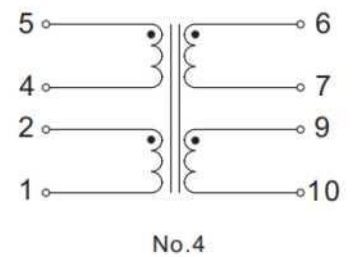

Double Input / Double Output