

Power: **2.5VA - 6.0VA**





Features


- Non Short-circuit Proof
- Vacuum Filling
- Split Bobbin Design & Winding
- Temperature Class: ta50°C/B, ta70°C/B
- Frequency 50/60Hz
- Dielectric Strength 4200Vrms
- 100% Tested Production
- UL file No.E352173
- According to EN61558-1/EN61558-2-6,UL5085-1/-3



Outline Dimensions

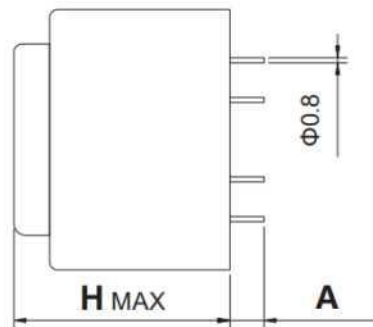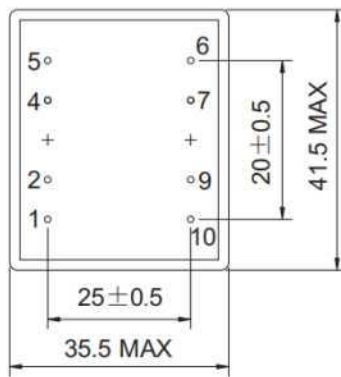


H	22	28.5	32
A	4.0±0.5	4.5±0.5	5.0±0.5




Unit : mm
Unit


Electrical Schematic

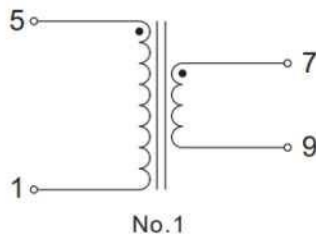


Single Input / Single Output

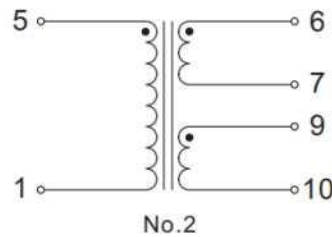

Single Input / Double Output

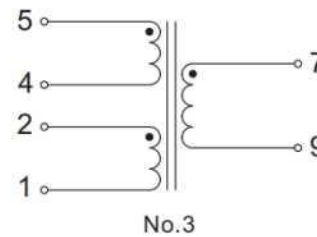

Double Input / Single Output

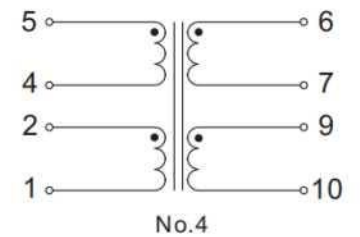

Double Input / Double Output

产品高度说明 Product Height Specification

Model	Temperature Class		High(mm) Max	weight (g)	Packaging Unit (pcs)
	ta70°C/B	ta50°C/B			
A3807-X-XXXX-XXX-X	2.5VA	-	22	100	120
A3813-X-XXXX-XXX-X	3.2VA/4.5VA	4.5VA	28.5	150	105
A3816-X-XXXX-XXX-X	6.0VA	-	32	180	84