

Power: **5.0VA - 8.0VA**




Features


- Non Short-circuit Proof
- Vacuum Filling
- Split Bobbin Design & Winding
- Temperature Class: ta50°C/B, ta70°C/B
- Frequency 50/60Hz
- Dielectric Strength 4200Vrms
- 100% Tested Production
- According to EN61558-1/EN61558-2-6, UL5085-1/-3



Outline Dimensions

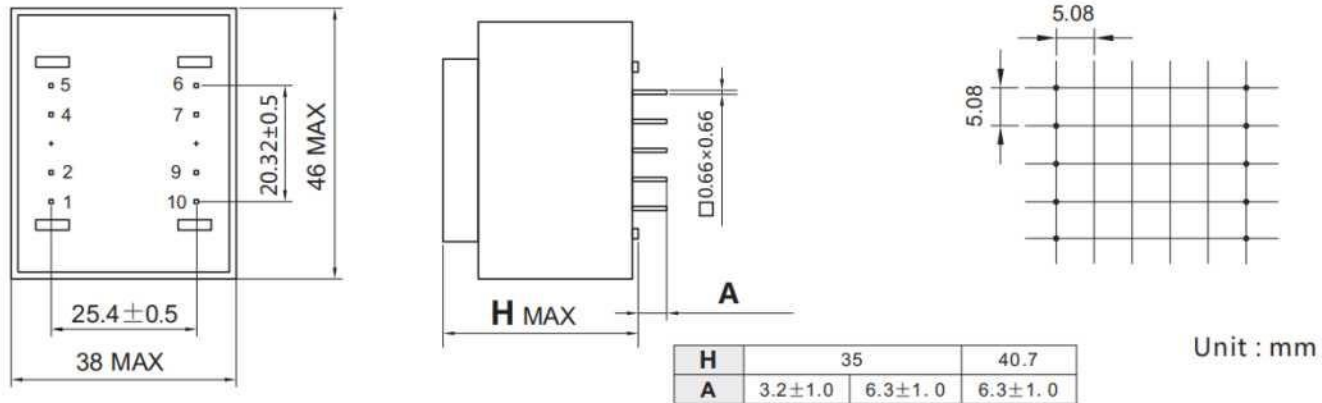

Electrical Schematic

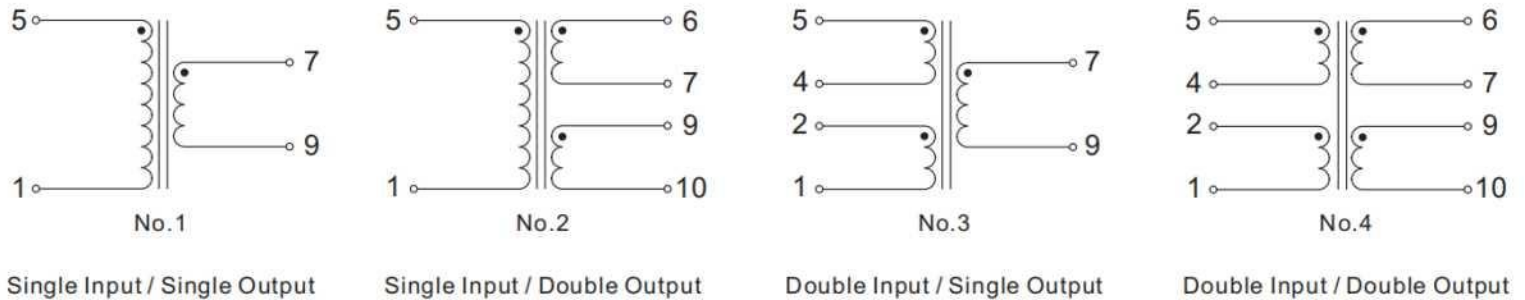

产品高度说明 Product Height Specification

Model	Temperature Class		High(mm) Max	weight (g)	Packaging Unit (pcs)
	ta70°C/B	ta50°C/B			
A4115-X-XXXX-XXX-X	5.0VA	6.0VA	35	195	84
A4123-X-XXXX-XXX-X	8.0VA	-	40.7	250	56