


Power: **5.0VA - 9.0VA**




Features


- Non Short-circuit Proof
- Vacuum Filling
- Split Bobbin Design & Winding
- Temperature Class: ta50°C/B, ta70°C/B
- Frequency 50/60Hz
- Dielectric Strength 4200Vrms
- 100% Tested Production
- UL file No.E352173
- According to EN61558-1/EN61558-2-6,UL5085-1/-3

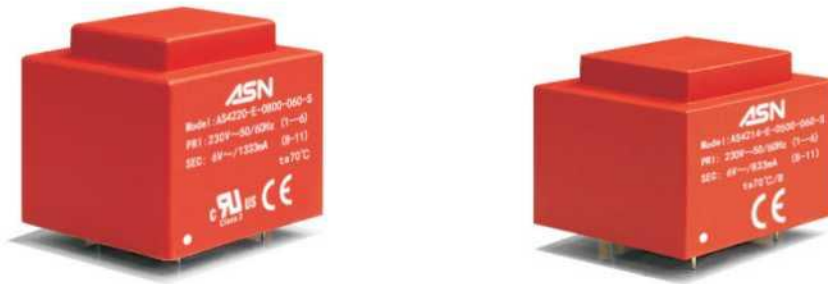

Outline Dimensions

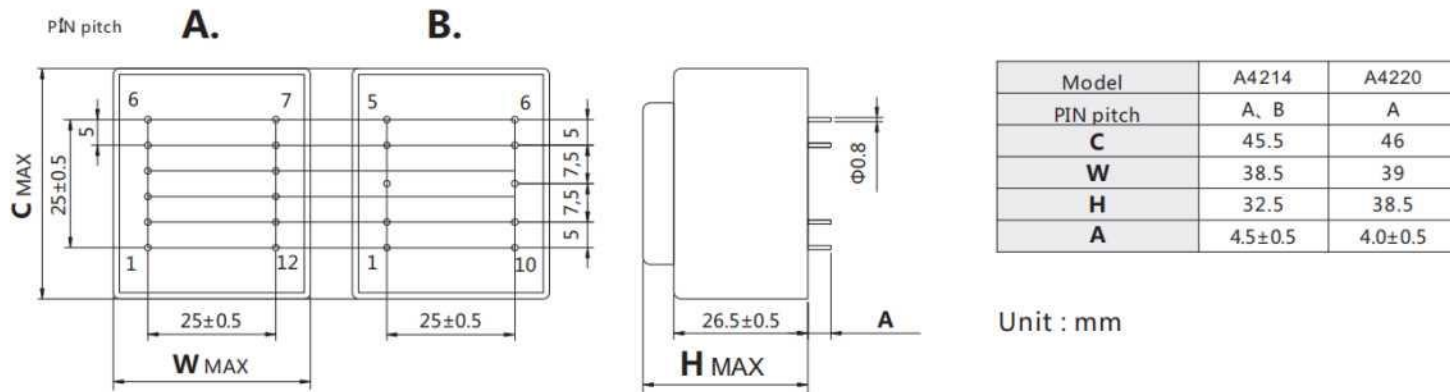

Electrical Schematic

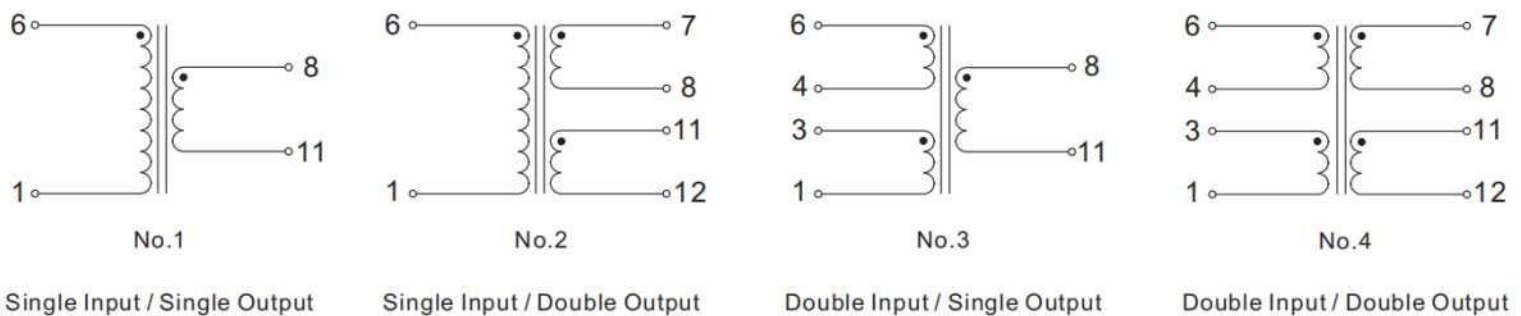

Product Height Specification

Model	Temperature Class		High(mm) Max	weight (g)	Packaging Unit (pcs)
	ta70°C/B	ta50°C/B			
A4214-X-XXXX-XXX-X	5.0VA	6.0VA	32.5	200	84
A4220-X-XXXX-XXX-X	8.0VA	9.0VA	38.5	260	63