


Power: **4.0VA - 15.0VA**




Features

- Non Short-circuit Proof
- Vacuum Filling
- Split Bobbin Design & Winding
- Temperature Class: ta70°C/B
- Frequency 50/60Hz
- Dielectric Strength 4200Vrms
- 100% Tested Production
- According to EN61558-1/EN61558-2-6,UL5085-1/-3

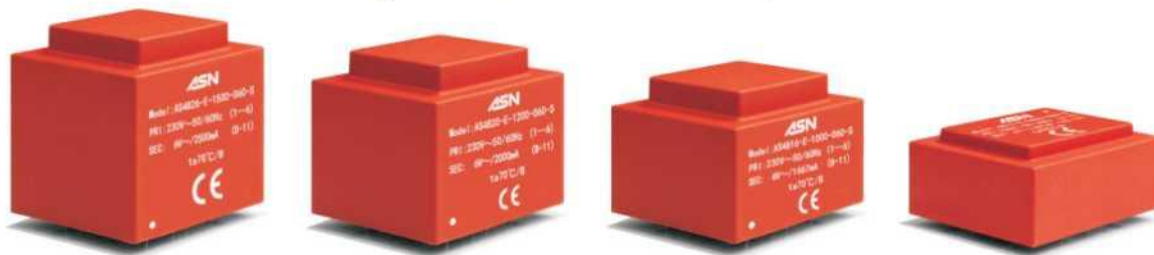


Outline Dimensions

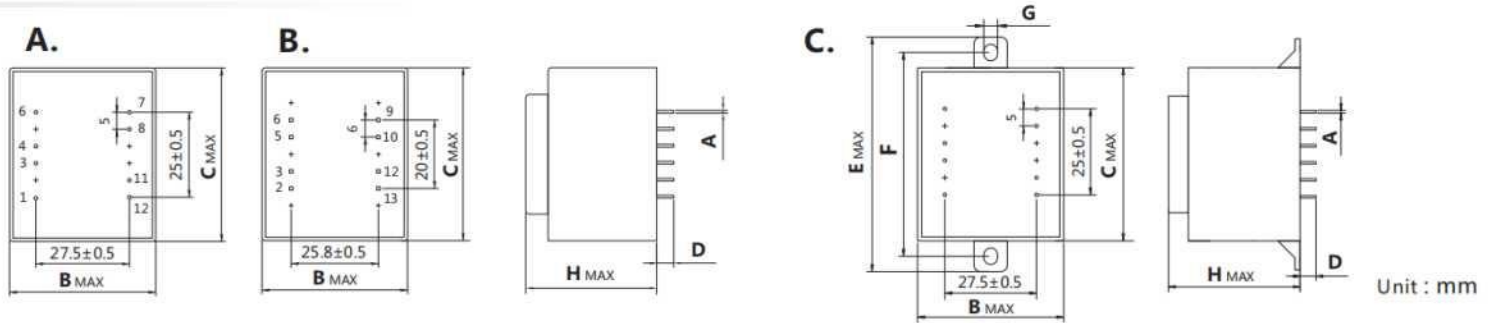

Model	Type	A	B	C	D	E	F	G	H
A4812	B	□0.7×0.7	43	51	3.5±0.5	-	-	-	22.5
A4816	A / C	φ0.8	43.5/44	51.5/52	3.5/4.0±0.5	70.5	60.0±0.5	φ 3.2	35.0/36
A4820	A / C	φ0.8	44/43.5	52/51.5	4.0/4.5±0.5	68.5	59.5±0.5	φ 4.0	39.5/39
A4826	A / C	φ0.8	44.5/43.5	52.7/51.5	6.0±0.5	68	60.5±0.5	φ 4.3	46/46.5

Electrical Schematic

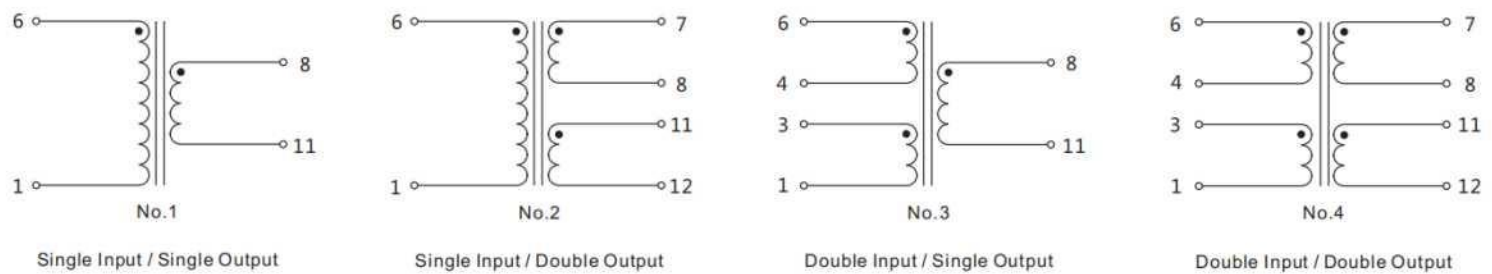

Note: A4812 series input PIN : single 2-6 , double 2-3 and 5-6;output PIN:10-12, double output 9-10p and 12-13.

Product Height Specification

Model	Temperature Class	High(mm) Max	weight (g)	Packaging Unit (pcs)
	ta70°C/B			
A4812-X-XXXX-XXX-X	4.0VA	22.5	195	72
A4816-X-XXXX-XXX-X	10.0VA	35.0/36	295	54
A4820-X-XXXX-XXX-X	12.0VA	39.5/39	350	45
A4826-X-XXXX-XXX-X	15.0VA	46/46.5	420	45