



Power: **25.0VA - 30.0VA**

Features

- Non Short-circuit Proof
- Vacuum Filling
- Split Bobbin Design & Winding
- Temperature Class: $t_a 70^\circ\text{C}/\text{B}$
- Frequency 50/60Hz
- Dielectric Strength 4200Vrms
- 100% Tested Production
- According to EN61558-1/EN61558-2-6, UL5085-1/-3
- 780g/pc, 16pcs per carton




Outline Dimensions

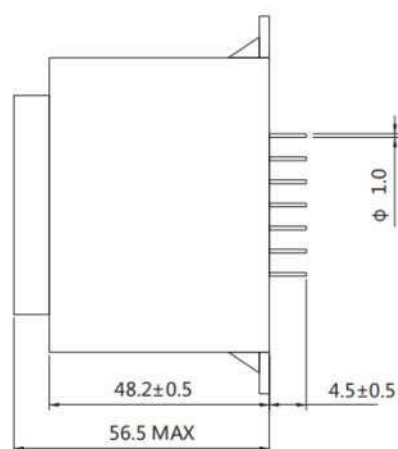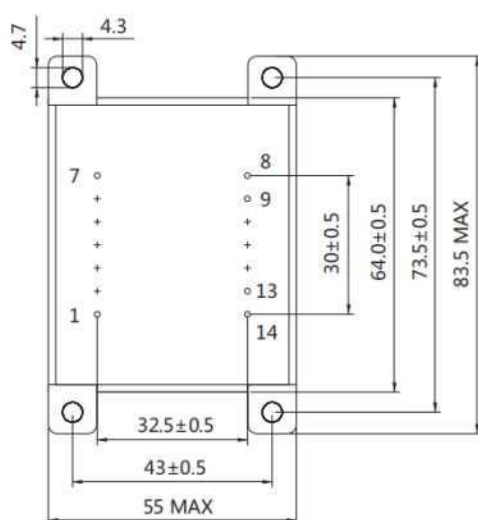


Unit : mm

Electrical Schematic

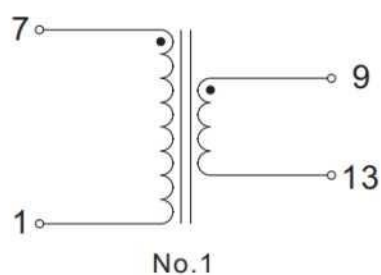

Single Input / Single Output

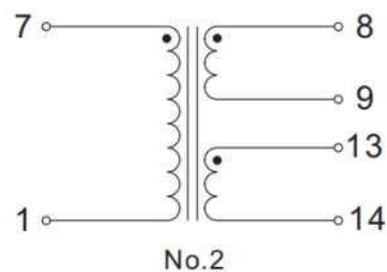

Single Input / Double Output