

**Power: 25.0VA - 30.0VA**




**Features**

- Non Short-circuit Proof
- Vacuum Filling
- Split Bobbin Design & Winding
- Temperature Class: ta70°C/B
- Frequency 50/60Hz
- Dielectric Strength 4200Vrms
- 100% Tested Production
- According to EN61558-1/EN61558-2-6,UL5085-1/-3
- 780g/pc,16pcs per carton




**Outline Dimensions**

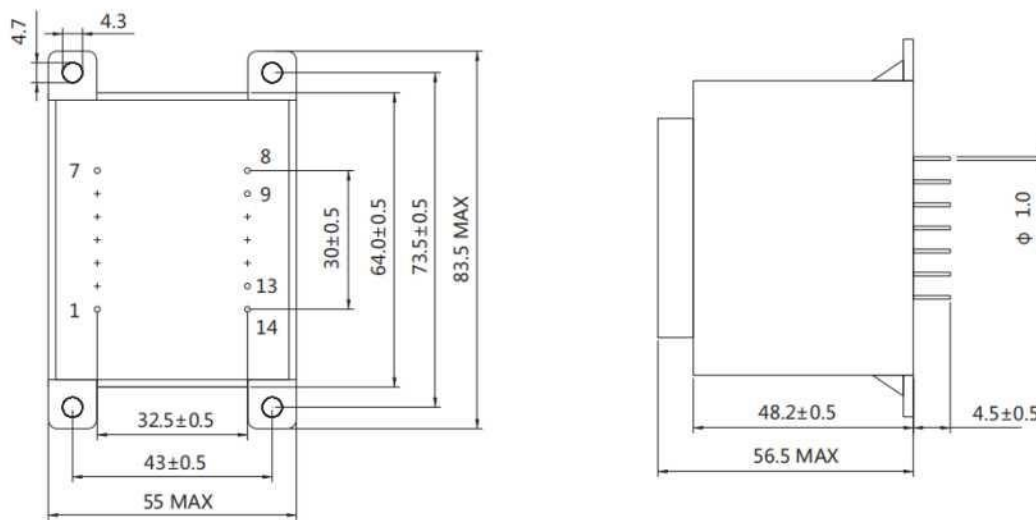


Unit : mm

**Electrical Schematic**

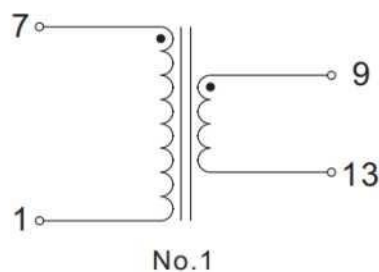

Single Input / Single Output

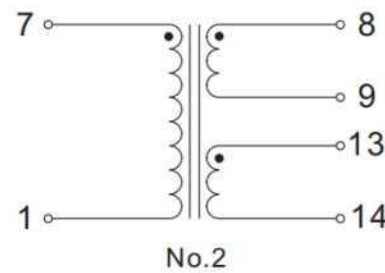

Single Input / Double Output