

Power: **44.0 VA**





Features

- Non Short-circuit Proof
- Vacuum Filling
- Split Bobbin Design & Winding
- Temperature Class: ta70°C/B
- Frequency 50/60Hz
- Dielectric Strength 4200Vrms
- 100% Tested Production
- According to EN61558-1/EN61558-2-6,UL5085-1/-3
- 780g/pc,16pcs per carton




Outline Dimensions

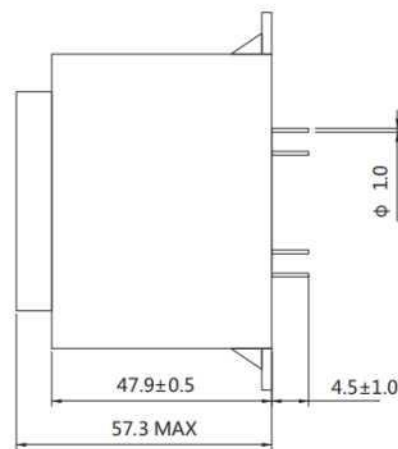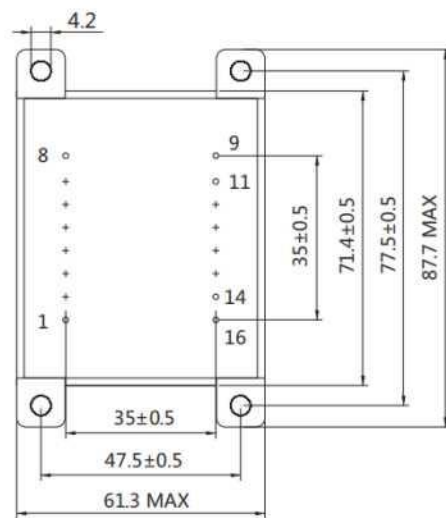


Unit : mm

Electrical Schematic

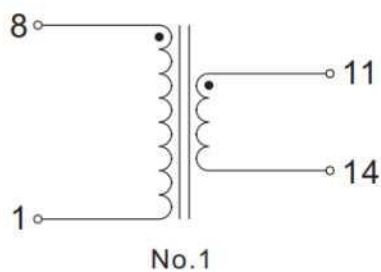

Single Input / Single Output

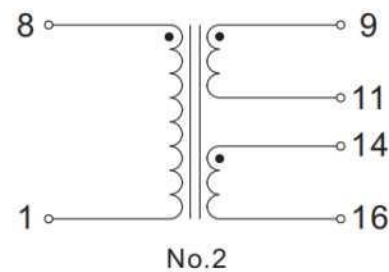

Single Input / Double Output