


FEATURES

- Top of the range pure aluminum foil capacitor,
- Very Low Dielectric absorption factor
- Very Low Dissipation factor, Very Low ESR, Very Low Inductance
- A Platinum capacitor designed especially for modern high-end tweeters and mid-range drivers

SPECIFICATIONS	
Passive flammability	GB10191-88 IEC384-16
Operating temperature	-55°C ~ +85°C
Capacitance range	1~10uF
Capacitance tolerance	±3% 1KHz
Rated voltage	100V、200V.DC
Withstand voltage	1.6VR 5S
Dissipation factor	≤0.0002 1KHz
Insulate the electric resistance	$C_R \leq 0.33\mu F$, $I.R \geq 15,000M\Omega$
	$C_R > 0.33\mu F$, $I.R \geq 5,000S$
Leads Diameter	1.0 Tinned Pure Copper Wire

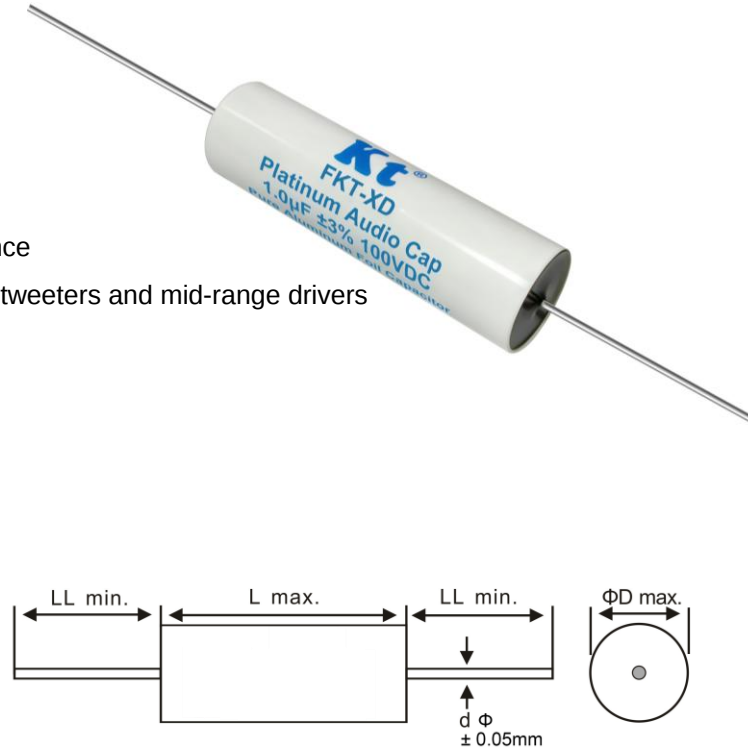

STANDARD SIZE TABLE (mm)

μF	100V				
	Dissipation	ΦD	L	d	LL
1.0uF	≤0.0002	17	52	1.0	45
1.5uF	≤0.0002	19	52	1.0	45
1.8uF	≤0.0002	17	60	1.0	45
2.0uF	≤0.0002	18	60	1.0	45
2.2uF	≤0.0002	19	60	1.0	45
2.7uF	≤0.0002	20	60	1.0	45
3.0uF	≤0.0002	19	77	1.0	45
3.3uF	≤0.0002	20	77	1.0	45
4.0uF	≤0.0002	22	77	1.0	45
4.7uF	≤0.0002	23	77	1.0	45
5.0uF	≤0.0002	23	77	1.0	45
5.6uF	≤0.0002	24	77	1.0	45
6.0uF	≤0.0002	24	87	1.0	45
6.8uF	≤0.0002	25	87	1.0	45
7.0uF	≤0.0002	25.5	87	1.0	45
8.0uF	≤0.0002	26	87	1.0	45
8.2uF	≤0.0002	27	87	1.0	45
9.0uF	≤0.0002	29	87	1.0	45
10.0uF	≤0.0002	30	87	1.0	45

Note: Specifications are subject to change without notice.