

Features


- Semi-shielded construction
- Enhanced product reliability with soldered lead-wire
- AEC-Q200 compliant
- RoHS compliant* and halogen free**

SRN3015BTA Series - Semi-shielded Power Inductors


Electrical Specifications @ 25 °C

	Inductance @ 100 kHz / 1 V		Q @ 1 MHz	SRF	DCR (mc)	DCR	I _{rms}	I _{sat}
Bourns Part No.	L (μH)	Tol. %	Min.	(MHz) Typ.	(mΩ) Typ.	(mΩ) Max.	(A) Typ.	(A) Typ.
SRN3015BTA-R24M	0.24	±20	3	360	13	16	5.0	6.0
SRN3015BTA-R47M	0.47	±20	10	246	18	22	3.7	4.3
SRN3015BTA-R68M	0.68	±20	10	190	23	28	3.5	3.8
SRN3015BTA-1R0M	1.0	±20	10	155	30	36	3.0	3.0
SRN3015BTA-1R5M	1.5	±20	10	120	36	43	2.7	2.4
SRN3015BTA-2R2M	2.2	±20	10	96	60	72	2.5	2.1
SRN3015BTA-3R3M	3.3	±20	10	75	80	96	2.2	1.7
SRN3015BTA-4R7M	4.7	±20	10	62	112	134	1.9	1.5
SRN3015BTA-5R6M	5.6	±20	10	54	135	162	1.8	1.4
SRN3015BTA-6R8M	6.8	±20	10	50	172	206	1.7	1.3
SRN3015BTA-100M	10.0	±20	10	45	220	264	1.5	1.0
SRN3015BTA-150M	15.0	±20	15	30	310	372	1.2	0.85
SRN3015BTA-180M	18.0	±20	15	29	380	456	1.1	0.73
SRN3015BTA-220M	22.0	±20	15	26	450	540	1.00	0.68
SRN3015BTA-330M	33.0	±20	15	21	780	940	0.85	0.57
SRN3015BTA-470M	47.0	±20	15	18	1200	1440	0.7	0.46
SRN3015BTA-101M	100	±20	15	13	3400	4080	0.4	0.33

Product Dimensions




[†] Dimension does not include termination. For maximum overall dimensions with termination, add 0.1 mm (.004 in.).



DIMENSIONS: $\frac{MM}{(INCHES)}$

Electrical Schematic



How to Order SRN3015BTA - R24M Model _____

Value Code (see table)

Additional Information

Click these links for more information:











PRODUCT ELECTOR

TECHNICA LIBRARY

<u>INICAL INVENTORY S</u>

CONTAC

General Specifications

Operating Temperature

.....-55 °C to +125 °C (Temperature rise included)

Storage Temperature

(Component on board)

.....-55 °C to +125 °C

(In tape and reel package)

.....-10 °C to +40 °C, 50-60 % RH Temperature Rise40 °C at rated I_{rms}^{-1}


Rated Current
......Inductance drops 30 % at I_{sat}

size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.

Materials

Core	Ferrite
	Enameled copper
Terminal Finish	Ag/Ni/Sn
Coating	Magnetic resin
Packaging	2000 pcs. per 7-inch reel

Recommended Layout





WARNING Cancer and Reproductive Harm www.P65Warnings.ca.gov


RoHS Directive 2015/863, Mar 31, 2015 and Annex.

^{*} Bourns considers a product to be "halogen free" if (a) the Bromine (Br) content is 900 ppm or less; (b) the Chlorine (Cl) content is 900 ppm or less; and (c) the total Bromine (Br) and Chlorine (Cl) content is 1500 ppm or less.

SRN3015BTA Series – Semi-shielded Power Inductors

BOURNS


Soldering Profile

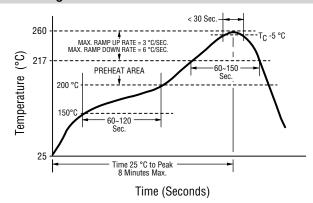



Profile Feature	Pb Free Assembly			
Preheat - Temperature Min. (T _{Smin}) - Temperature Max. (T _{Smax}) - Time(t _S) from T _{Smin} to T _{Smax}	150 °C 200 °C 60-120 seconds			
Ramp-up Rate (T _L to T _p)	3 °C/second max.			
Liquidous temperature (T _L) Time (t _L) maintained above T _L	217 °C 60-150 seconds			
Peak package body temperature (Tp)	260 °C			
Time within 5 °C of Actual Peak Temperature (t _p)	< 30 seconds			
Ramp-Down Rate (T _p to T _L)	6 °C/second max.			
Time 25 °C to Peak Temperature	8 minutes max.			


REFLOW TIMES: 3 TIMES MAX.


L vs. I Charts























Specifications are subject to change without notice.


Users should verify actual device performance in their specific applications.


The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.


SRN3015BTA Series – Semi-shielded Power Inductors


BOURNS


L vs. I Charts (continued)






















SRN3015BTA Series - Semi-shielded Power Inductors

BOURNS

Packaging Specifications

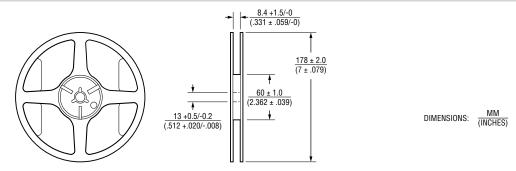

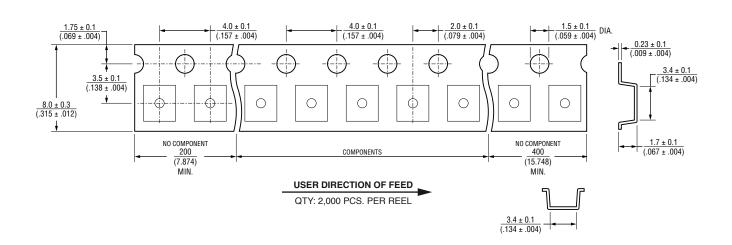

BOURNS®

Americas: Tel: +1 951-781-5500 • Email: americus@bourns.com

Mexico: Tel: +52-614-478-0400 • Email: mexicus@bourns.com

Asia: Tel: +886-2-2562-4117 • Email: asiacus@bourns.com

EMEA: Tel: +36 88 885 877 • Email: eurocus@bourns.com

www.bourns.com

REV. 06/25

Legal Disclaimer Notice



This legal disclaimer applies to purchasers and users of Bourns® products manufactured by or on behalf of Bourns, Inc. and its affiliates (collectively, "Bourns").

Unless otherwise expressly indicated in writing, Bourns® products and data sheets relating thereto are subject to change without notice. Users should check for and obtain the latest relevant information and verify that such information is current and complete before placing orders for Bourns® products.

The characteristics and parameters of a Bourns® product set forth in its data sheet are based on laboratory conditions, and statements regarding the suitability of products for certain types of applications are based on Bourns' knowledge of typical requirements in generic applications. The characteristics and parameters of a Bourns® product in a user application may vary from the data sheet characteristics and parameters due to (i) the combination of the Bourns® product with other components in the user's application, or (ii) the environment of the user application itself. The characteristics and parameters of a Bourns® product also can and do vary in different applications and actual performance may vary over time. Users should always verify the actual performance of the Bourns® product in their specific devices and applications, and make their own independent judgments regarding the amount of additional test margin to design into their device or application to compensate for differences between laboratory and real world conditions.

Unless Bourns has explicitly designated an individual Bourns® product as meeting the requirements of a particular industry standard (e.g., IATF 16949) or a particular qualification (e.g., UL listed or recognized), Bourns is not responsible for any failure of an individual Bourns® product to meet the requirements of such industry standard or particular qualification. Users of Bourns® products are responsible for ensuring compliance with safety-related requirements and standards applicable to their devices or applications.

Bourns® products are not recommended, authorized or intended for use in nuclear, lifesaving, life-critical or life-sustaining applications, nor in any other applications where failure or malfunction may result in personal injury, death, or severe property or environmental damage. Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any Bourns® products in such unauthorized applications might not be safe and thus is at the user's sole risk. Life-critical applications include devices identified by the U.S. Food and Drug Administration as Class III devices and generally equivalent classifications outside of the United States.

Bourns expressly identifies those Bourns® standard products that are suitable for use in automotive applications on such products' data sheets in the section entitled "Applications." Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard products in an automotive application might not be safe and thus is not recommended, authorized or intended and is at the user's sole risk. If Bourns expressly identifies a sub-category of automotive application in the data sheet for its standard products (such as infotainment or lighting), such identification means that Bourns has reviewed its standard product and has determined that if such Bourns® standard product is considered for potential use in automotive applications, it should only be used in such sub-category of automotive applications. Any reference to Bourns® standard product in the data sheet as compliant with the AEC-Q standard or "automotive grade" does not by itself mean that Bourns has approved such product for use in an automotive application.

Bourns® standard products are not tested to comply with United States Federal Aviation Administration standards generally or any other generally equivalent governmental organization standard applicable to products designed or manufactured for use in aircraft or space applications. Bourns expressly identifies Bourns® standard products that are suitable for use in aircraft or space applications on such products' data sheets in the section entitled "Applications." Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard product in an aircraft or space application might not be safe and thus is not recommended, authorized or intended and is at the user's sole risk.

The use and level of testing applicable to Bourns® custom products shall be negotiated on a case-by-case basis by Bourns and the user for which such Bourns® custom products are specially designed. Absent a written agreement between Bourns and the user regarding the use and level of such testing, the above provisions applicable to Bourns® standard products shall also apply to such Bourns® custom products.

Users shall not sell, transfer, export or re-export any Bourns® products or technology for use in activities which involve the design, development, production, use or stockpiling of nuclear, chemical or biological weapons or missiles, nor shall they use Bourns® products or technology in any facility which engages in activities relating to such devices. The foregoing restrictions apply to all uses and applications that violate national or international prohibitions, including embargos or international regulations. Further, Bourns® products and Bourns technology and technical data may not under any circumstance be exported or re-exported to countries subject to international sanctions or embargoes. Bourns® products may not, without prior authorization from Bourns and/or the U.S. Government, be resold, transferred, or re-exported to any party not eligible to receive U.S. commodities, software, and technical data.

To the maximum extent permitted by applicable law, Bourns disclaims (i) any and all liability for special, punitive, consequential, incidental or indirect damages or lost revenues or lost profits, and (ii) any and all implied warranties, including implied warranties of fitness for particular purpose, non-infringement and merchantability.

For your convenience, copies of this Legal Disclaimer Notice with German, Spanish, Japanese, Traditional Chinese and Simplified Chinese bilingual versions are available at:

Web Page: http://www.bourns.com/legal/disclaimers-terms-and-policies

PDF: http://www.bourns.com/docs/Legal/disclaimer.pdf